

INTERNATIONAL STANDARD

NORME INTERNATIONALE

Optical amplifiers – Test methods –
Part 1-3: Power and gain parameters – Optical power meter method
[standards.iteh.ai](https://standards.iteh.ai/catalog/standards/sud/c3ec20-6156-4cc10768-3766f8/iec-61290-1-3-2021)

Amplificateurs optiques – Méthodes d'essai –
Partie 1-3: Paramètres de puissance et de gain – Méthode par appareil de
mesure de la puissance optique





THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2021 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC online collection - oc.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 18 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC -

webstore.iec.ch/advsearchform

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études, ...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC online collection - oc.iec.ch

Découvrez notre puissant moteur de recherche et consultez gratuitement tous les aperçus des publications. Avec un abonnement, vous aurez toujours accès à un contenu à jour adapté à vos besoins.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 000 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 16 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Optical amplifiers – Test methods –
Part 1-3: Power and gain parameters – Optical power meter method**

**Amplificateurs optiques – Méthodes d'essai –
Partie 1-3: Paramètres de puissance et de gain – Méthode par appareil de
mesure de la puissance optique**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 33.180.30

ISBN 978-2-8322-9475-8

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

CONTENTS

FOREWORD	3
1 Scope	5
2 Normative references	5
3 Terms, definitions and abbreviated terms	5
3.1 Terms and definitions.....	5
3.2 Abbreviated terms.....	6
4 Apparatus	7
5 Test sample.....	9
6 Procedure.....	9
7 Calculation	12
8 Test results	13
Annex A (informative) Optimization of optical bandpass filter spectral width.....	15
Bibliography.....	16
Figure 1 – Typical arrangement of optical power meter test apparatus for measurement.....	7

iTeh STANDARD PREVIEW **(standards.iteh.ai)**

[IEC 61290-1-3:2021](https://standards.iteh.ai/catalog/standards/sist/d7c3ec2b-b136-4ee1-b7b8-664c7f3766f8/iec-61290-1-3-2021)

<https://standards.iteh.ai/catalog/standards/sist/d7c3ec2b-b136-4ee1-b7b8-664c7f3766f8/iec-61290-1-3-2021>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

OPTICAL AMPLIFIERS – TEST METHODS –**Part 1-3: Power and gain parameters – Optical power meter method**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 61290-1-3 has been prepared by subcommittee 86C: Fibre optic systems and active devices, of IEC technical committee 86: Fibre optics. It is an International Standard.

This fourth edition cancels and replaces the third edition published in 2015. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) harmonization with IEC 61290-1-1;
- b) use of the term "measurement uncertainty" instead of "measurement accuracy".

The text of this International Standard is based on the following documents:

Draft	Report on voting
86C/1671/CDV	86C/1698/RVC

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

A list of all parts in the IEC 61290 series, published under the general title *Optical amplifiers – Test methods*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[IEC 61290-1-3:2021](https://standards.iteh.ai/catalog/standards/sist/d7c3ec2b-b136-4ee1-b7b8-664c7f3766f8/iec-61290-1-3-2021)

<https://standards.iteh.ai/catalog/standards/sist/d7c3ec2b-b136-4ee1-b7b8-664c7f3766f8/iec-61290-1-3-2021>

OPTICAL AMPLIFIERS – TEST METHODS –

Part 1-3: Power and gain parameters – Optical power meter method

1 Scope

This part of IEC 61290 applies to all commercially available optical amplifiers (OA) and optically amplified subsystems. It applies to OA using optically pumped fibres (OPA based on either rare-earth doped fibres or on the Raman effect), semiconductors (SOA), and waveguides (POWA).

NOTE 1 The applicability of the test methods described in this document to distributed Raman amplifiers is for further study.

The object of this document is to establish uniform requirements for accurate and reliable measurements, by means of the optical power meter test method, of the following OA parameters, as defined in IEC 61291-1:

- a) nominal output signal power;
- b) gain;
- c) polarization-dependent gain;
- d) maximum output signal power;
- e) maximum total output power.

NOTE 2 All numerical values followed by (\pm) are suggested values for which the measurement is assured. Other values can be acceptable upon verification. IEC 61290-1-3:2021

This document applies to single-channel amplifiers. For multichannel amplifiers, IEC 61290-10 (all parts) applies.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60793-2-50, *Optical fibres – Part 2-50: Product specifications – Sectional specification for class B single-mode fibres*

IEC 61291-1, *Optical amplifiers – Part 1: Generic specification*

3 Terms, definitions and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 61291-1 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.2 Abbreviated terms

ASE	amplified spontaneous emission
DBR	distributed Bragg reflector (laser diode)
DFB	distributed feedback (laser diode)
ECL	external cavity laser (diode)
FWHM	full width at half maximum
LED	light emitting diode
OA	optical amplifier
OFA	optical fibre amplifier
OSA	optical spectrum analyzer
PDL	polarization dependent loss
POWA	planar optical waveguide amplifier
SOA	semiconductor optical amplifier

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[IEC 61290-1-3:2021](https://standards.iteh.ai/catalog/standards/sist/d7c3ec2b-b136-4ee1-b7b8-664c7f3766f8/iec-61290-1-3-2021)

<https://standards.iteh.ai/catalog/standards/sist/d7c3ec2b-b136-4ee1-b7b8-664c7f3766f8/iec-61290-1-3-2021>

4 Apparatus

A diagram of the measurement set-up is given in Figure 1 a), Figure 1 b), Figure 1 c) and Figure 1 d).

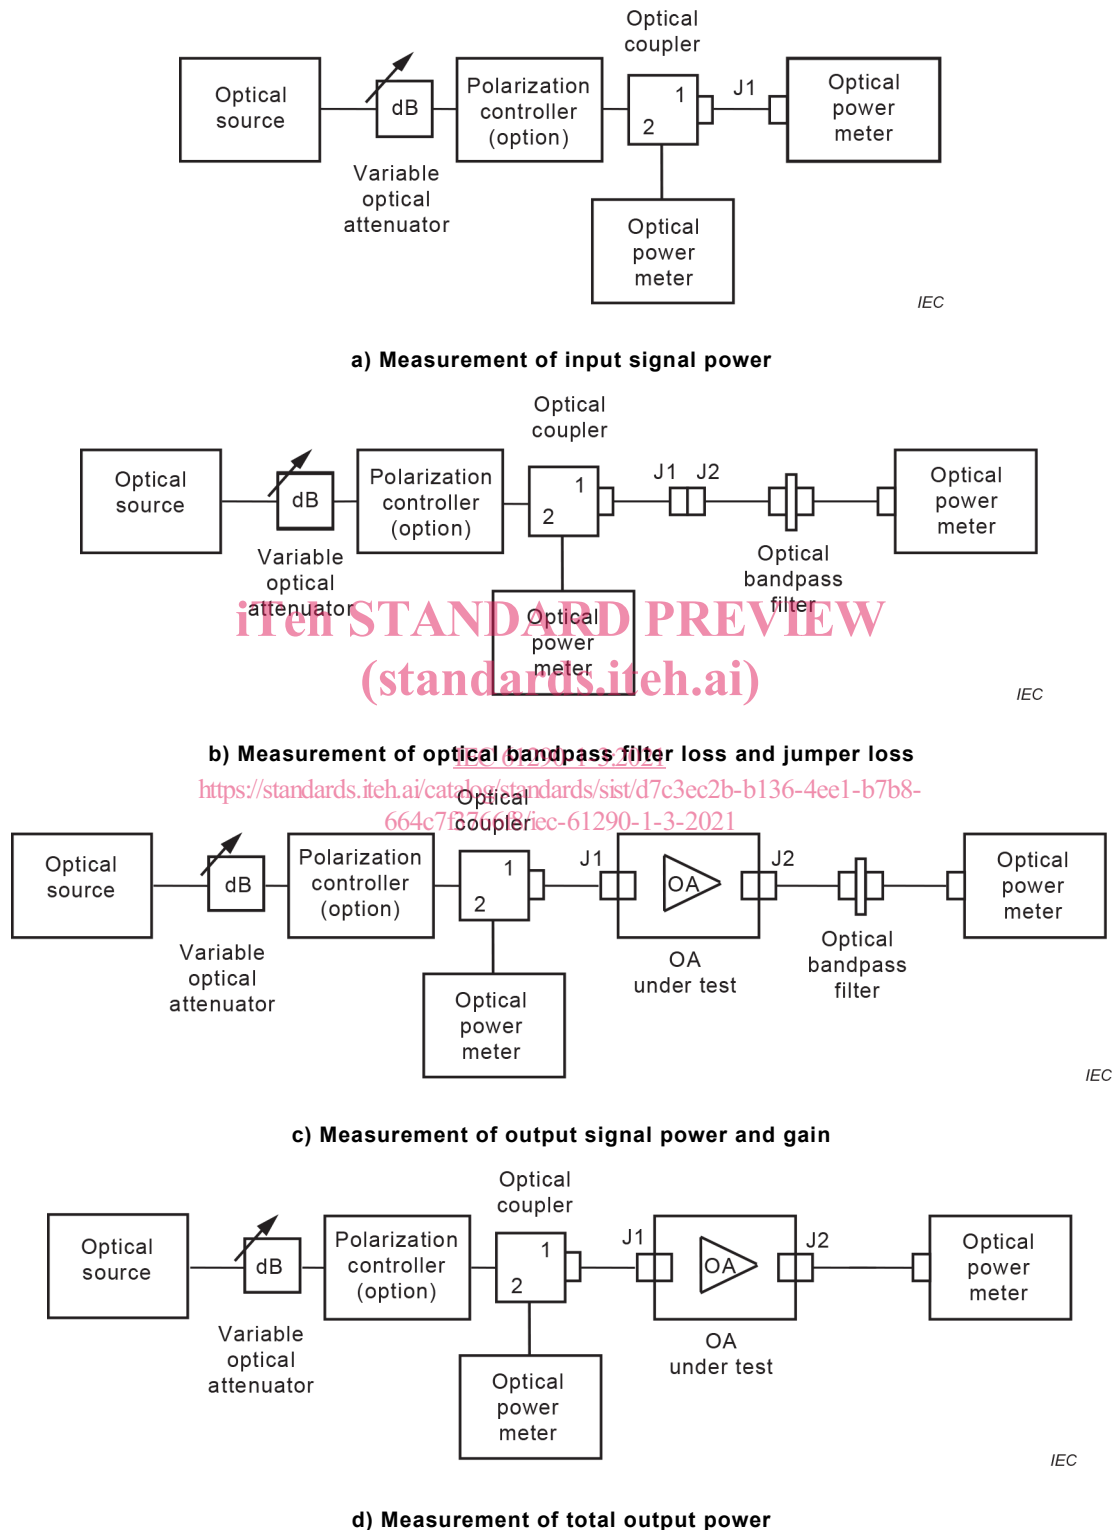


Figure 1 – Typical arrangement of optical power meter test apparatus for measurement

The test equipment listed below, with the required characteristics, is needed.

- a) Optical source: The optical source shall be either at fixed wavelength or wavelength-tuneable.
- Fixed-wavelength optical source: This optical source shall generate a light with a wavelength and optical power specified in the relevant product specification. Unless otherwise specified, the optical source shall emit a continuous wave with FWHM of the spectrum narrower than 1 nm (\pm). A distributed feedback (DFB) laser, a distributed Bragg reflector (DBR) laser, an external cavity laser (ECL) diode, a light emitting diode (LED) with a narrow-band filter and a single line laser are applicable, for example.
- The suppression ratio for the side modes for the DFB laser, the DBR laser or the ECL shall be higher than 30 dB (\pm). The output power fluctuation shall be less than 0,05 dB (\pm), which can be more easily attainable with an optical isolator at the output port of the optical source. Spectral broadening at the foot of the lasing spectrum shall be minimal for laser sources, and the ratio of the source power to total spontaneous emission power of the laser shall be more than 30 dB.
- Wavelength-tuneable optical source: This optical source shall be able to generate a wavelength-tuneable light within the range specified in the relevant product specification. Its optical power shall be specified in the relevant product specification. Unless otherwise specified, the optical source shall emit a continuous wave with the full width at half maximum (FWHM) of the spectrum narrower than 1 nm (\pm). An ECL or an LED with a narrow bandpass optical filter is applicable, for example. The suppression ratio of side modes for the ECL shall be higher than 30 dB (\pm). The output power fluctuation shall be less than 0,05 dB, which can be more easily attainable with an optical isolator at the output port of the optical source. Spectral broadening at the foot of the lasing spectrum shall be minimal for laser sources, and the ratio of the source power to total spontaneous emission power of the laser shall be more than 30 dB.
- b) Optical power meter: It shall have a measurement uncertainty of less than 0,2 dB, irrespective of the state of polarization, within the operational wavelength bandwidth of the OA. A maximum optical input power shall be large enough [e.g. +20 dBm (\pm)]. Sensitivity shall be high enough [e.g. -40 dBm (\pm)]. A dynamic range exceeding the measured gain is required (e.g. 40 dB).
- c) Optical isolator: Optical isolators may be used to bracket the OA. The polarization dependent loss (PDL) of the isolator shall be less than 0,2 dB (\pm). Optical isolation shall be more than 40 dB (\pm). The reflectance from this device shall be smaller than -40 dB (\pm) at each port.
- d) Variable optical attenuator: The attenuation range and stability shall be over 40 dB (\pm) and less than 0,2 dB (\pm), respectively. The reflectance from this device shall be smaller than -40 dB (\pm) at each port.
- e) Polarization controller: This device shall be able to provide as input signal light all possible states of polarization (e.g. linear, elliptical and circular). For example, the polarization controller may consist of a linear polarizer followed by an all-fibre-type polarization controller, or by a linear polarizer followed by a quarter-wave plate rotatable by minimum of 90° and a half wave plate rotatable by minimum of 180°. The loss variation of the polarization controller shall be less than 0,2 dB (\pm). The reflectance from this device shall be smaller than -40 dB (\pm) at each port. The use of a polarization controller is considered optional, except for the measurement of polarization dependent gain, but can be necessary to achieve the desired accuracy for OA devices exhibiting significant polarization dependent gain.
- f) Optical fibre jumpers: The optical fibre jumpers used shall be of the same fibre category defined in IEC 60793-2-50 as the fibres used as input and output ports of the OA, so that the mode field diameters of the optical fibre jumpers closely match those of the input and output fibres of the OA. The reflectance from this device shall be smaller than -40 dB (\pm) at each port, and the length of the jumper shall be shorter than 2 m.
- g) Optical connectors: The connection loss repeatability shall be less than 0,2 dB. The reflectance from this device shall be smaller than -40 dB (\pm).
- h) Optical bandpass filter: The optical bandwidth (FWHM) of this device shall be less than 3 nm (\pm). It shall be either wavelength-tuneable or an appropriate set of fixed bandpass filters.

During measurement, the difference between the centre wavelength of this bandwidth and the optical source centre wavelength shall be no more than 1,5 nm (\pm). The PDL of the bandpass filter shall be less than 0,2 dB (\pm). The reflectance from this device shall be smaller than -40 dB (\pm).

NOTE 1 Optimization of optical band pass filter spectral width is discussed in Annex A.

- i) Optical coupler: The polarization dependence of the branching ratio of the coupler shall be less than 0,1 dB (\pm). Any unconnected port of the coupler shall be properly terminated, in such a way as to decrease the reflectance below -40 dB (\pm).

NOTE 2 The change of the state of polarization of the input light is typically negligible.

- j) Wavelength meter: It shall have a wavelength measurement uncertainty of less than 0,1 nm (\pm). If the optical source is so calibrated that the uncertainty of the wavelength is less than 0,1 nm (\pm), the wavelength meter is not necessary.

5 Test sample

The OA shall operate at nominal operating conditions. If the OA is likely to cause laser oscillations due to unwanted reflections, use of optical isolators is recommended to bracket the OA under test. This will reduce the signal instability and the measurement uncertainty.

Standard optical fibres type B-652.B or B-652.D as defined in IEC 60793-2-50 are recommended. Even if fibre type other than B-652.B or B-652.D is used as input/output fibre, the mode field diameter of the optical fibre jumpers closely matches those of the input and output fibres of the OA [see Clause 4 f)].

For all parameter measurements except polarization-dependent gain, care shall be taken to maintain the state of polarization of the input light during the measurement. Changes in the polarization state of the input light can result in input optical power changes because of the slight polarization dependency expected from all the optical components used, thus leading to measurement uncertainty.

6 Procedure

- a) Nominal output signal power: The nominal output signal power is given by the minimum output signal optical power, for an input signal optical power specified in the relevant product specification, and under nominal operating conditions, given in the relevant product specification. To find this minimum value, input and output signal power levels shall be continuously monitored for a given duration of time and in presence of changes in the state of polarization and other instabilities, as specified in the relevant product specification. The measurement procedures described below shall be followed, with reference to Figure 1.

In order to minimize the amplified spontaneous emission (ASE) power contribution to the signal power output from the OA, several methods may be used. The optical bandpass filter method is given below.

- 1) Set the optical source at the test wavelength specified in the relevant product specification, measuring the input signal wavelength (e.g. with a wavelength meter).
- 2) Measure the branching ratio of the optical coupler through the signal power levels exiting the two output ports with an optical power meter.
- 3) Measure the loss L_{bj} of the optical bandpass filter and the optical fibre jumper between the OA and the optical power meter [see Figure 1 b)] by the insertion loss technique [see method B (insertion loss) in IEC 60793-1-40].
- 4) Activate the OA under test and evaluate the ASE power level passed through the optical filter, P_{ASE} , by measuring the optical output power from the OA, as shown in Figure 1 c), without input signal.

NOTE 1 The small-signal regime is when the OA under test operates in the linear regime, whereas the large-signal regime is when it operates in the saturated regime. The distinction between small-signal and

large-signal regimes can be made by plotting G versus the input signal power with a constant pump drive. The linear regime requires the time-averaged input signal power to be in the range in which the gain is quite independent of the input signal power (see IEC 61290-1). An input signal power ranging from -30 dBm to -40 dBm is generally well within this range. In the saturated regime, the signal power is large enough to well suppress the ASE, so that the measurement of the ASE power is sometimes omitted.

NOTE 2 For consideration of measurement uncertainty, refer to the last paragraph of Annex A, which concerns the optimization of the optical band pass filter spectral width.

- 5) Set the optical source and the variable optical attenuator in such a way as to provide, at the input port of the OA, the input optical signal power (P_{in}) specified in the relevant product specification. Record the optical power (P_o) measured with an optical power meter at the other (second) output port of the optical coupler, as shown in Figure 1 a).

Applying signal light with short rise time into the OA operating without signal light can cause the generation of an optical surge which can damage the optical components. The input signal shall have sufficiently small power to prevent the optical surge, when it is launched to the OA initially. The input power shall be gradually increased to the specified level.

- 6) Keep the optical signal power at the OA input constant (P_{in}) during the following measurements, by monitoring the second output port of the coupler and, if necessary, setting the variable optical attenuator in such a way that the optical power (P_o) exiting the second output port of the optical coupler remains constant.
- 7) Connect the fibre jumpers to the input and output port of the OA under test, as shown in Figure 1 c) and evaluate the optical output power (P_{out}) with input signal.

If the polarization controller is used, the following procedure shall be adapted.

- 8) Set the polarization controller at a given state of polarization as specified in the relevant product specification; activate the OA, and monitor, by means of the optical power meter, the optical signal power at the output of the OA, for the specified period of time, recording the minimum value.
- 9) Change the state of polarization of the input signal by means of the polarization controller, trying to measure maximum and minimum output optical signal powers with the optical power meter, and repeat procedure 8).
- 10) Repeat procedure step 9) for the different states of polarization indicated in the relevant product specification and, finally, take the absolute minimum and maximum output optical signal powers recorded in the various conditions: $P_{out-min}$ and $P_{out-max}$.

Optical connectors J1 and J2 shall not be removed during the measurement to avoid measurement uncertainty due to reconnection.

The measurement uncertainty shall be reduced by eliminating the effect of the ASE simultaneously detected with the signal. This is better attainable by placing an optical bandpass filter having the narrower passband at the output of the OA under test, as it has been discussed in Clause 6 a). For large optical signal power levels, the optical bandpass filter is often not necessary to achieve an accurate measurement. The use of the optical bandpass filter is especially important when the input signal to the OA is small. This is because the ASE power increases as the input signal decreases. However, if this kind of optical filter is already built in the OA, the external optical filter is not needed. The effectiveness of the optical band pass filter is further discussed in Annex A.

b) Gain:

- 1) to 7) As in procedures 1) to 7) in a), but this method permits determination of the gain through the measurements of the OA input signal power P_{in} and the OA output power P_{out} , taking into account the OA amplified spontaneous emission (ASE) power P_{ASE} at the signal wavelength.
- 8) Repeat procedures 5) to 7) in a), with increasing input signal power gradually to the maximum input signal power given in the relevant product specification. Maintain the pump power or pump current with the firstly set point.

c) Polarization-dependent gain: as in a), but this parameter is determined through the measurements of the OA input signal power, P_{in} , the OA output power, $P_{out-min}$ and