

# TECHNICAL REPORT



High-voltage direct current (HVDC) systems – Guidance to the specification and design evaluation of AC filters –  
Part 4: Equipment

Document Preview

[IEC TR 62001-4:2021](https://standards.iteh.ai/)

<https://standards.iteh.ai/catalog/standards/iec/6df628cc-ba1f-4831-ad97-4eeeb60abdb0/iec-tr-62001-4-2021>



**THIS PUBLICATION IS COPYRIGHT PROTECTED**  
**Copyright © 2021 IEC, Geneva, Switzerland**

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland

Tel.: +41 22 919 02 11  
[info@iec.ch](mailto:info@iec.ch)  
[www.iec.ch](http://www.iec.ch)

**About the IEC**

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

**About IEC publications**

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

**IEC publications search - [webstore.iec.ch/advsearchform](http://webstore.iec.ch/advsearchform)**

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

**IEC online collection - [oc.iec.ch](http://oc.iec.ch)**

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

**IEC Just Published - [webstore.iec.ch/justpublished](http://webstore.iec.ch/justpublished)**

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

**Electropedia - [www.electropedia.org](http://www.electropedia.org)**

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 18 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

**IEC Customer Service Centre - [webstore.iec.ch/csc](http://webstore.iec.ch/csc)**

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: [sales@iec.ch](mailto:sales@iec.ch).

International Standards  
standards.iteh.ai  
Document Preview

[IEC TR 62001-4:2021](https://standards.iteh.ai/catalog/standards/iec/6df628cc-ba1f-4831-ad97-4ceeb60abdb0/iec-tr-62001-4-2021)

<https://standards.iteh.ai/catalog/standards/iec/6df628cc-ba1f-4831-ad97-4ceeb60abdb0/iec-tr-62001-4-2021>

# TECHNICAL REPORT



---

High-voltage direct current (HVDC) systems – Guidance to the specification and design evaluation of AC filters –  
Part 4: Equipment

Document Preview

[IEC TR 62001-4:2021](https://standards.iteh.ai/iec-tr-62001-4-2021)

<https://standards.iteh.ai/catalog/standards/iec/6df628cc-ba1f-4831-ad97-4eceb60abdb0/iec-tr-62001-4-2021>

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

---

ICS 29.200

ISBN 978-2-8322-4531-6

**Warning! Make sure that you obtained this publication from an authorized distributor.**

## CONTENTS

FOREWORD.....	6
INTRODUCTION.....	8
1 Scope.....	9
2 Normative references.....	9
3 Terms and definitions .....	9
4 Steady state rating .....	9
4.1 General.....	9
4.2 Calculation method .....	10
4.2.1 General .....	10
4.2.2 AC system pre-existing harmonics.....	11
4.2.3 Combination of converter and pre-existing harmonics .....	12
4.2.4 Equipment rating calculations.....	12
4.2.5 Application of voltage ratings.....	16
4.3 AC network conditions.....	17
4.4 De-tuning effects.....	17
4.5 Network impedance for rating calculations .....	17
4.6 Outages.....	18
5 Transient stresses and rating.....	18
5.1 General.....	18
5.2 Switching impulse studies .....	19
5.2.1 Energization and switching.....	19
5.2.2 Faults external to the filter.....	21
5.2.3 Faults internal to the filter.....	22
5.2.4 Transformer inrush currents.....	23
5.3 Fast fronted waveform studies .....	23
5.3.1 General .....	23
5.3.2 Lightning strikes.....	23
5.3.3 Busbar flashover studies .....	23
5.4 Insulation co-ordination .....	23
6 Losses .....	25
6.1 Background.....	25
6.2 AC filter component losses .....	25
6.2.1 General .....	25
6.2.2 Filter/shunt capacitor losses.....	26
6.3 Reactor and resistor losses .....	27
6.3.1 General .....	27
6.3.2 Filter resistor losses.....	28
6.3.3 Shunt reactor losses .....	28
6.4 Criteria for loss evaluation.....	28
6.4.1 General .....	28
6.4.2 Fundamental frequency AC filter busbar voltage .....	29
6.4.3 Fundamental frequency and ambient temperature.....	29
6.4.4 AC system harmonic impedance.....	29
6.4.5 Harmonic currents generated by the converter.....	30
6.4.6 Pre-existing harmonic distortion .....	30
6.4.7 Anticipated load profile of the converter station.....	31

7	Design issues and special applications .....	31
7.1	General.....	31
7.2	Performance aspects.....	31
7.2.1	Low order harmonic filtering and resonance conditions with AC system .....	31
7.2.2	Definition of interference factors to include harmonics up to 5 kHz .....	32
7.2.3	Triple-tuned filter circuits.....	33
7.2.4	Harmonic AC filters on tertiary winding of converter transformers .....	34
7.3	Rating aspects .....	35
7.3.1	Limiting high harmonic currents in parallel-resonant filter circuits .....	35
7.3.2	Transient ratings of parallel circuits in multiple tuned filters.....	35
7.3.3	Overload protection of high-pass harmonic filter resistors .....	36
7.3.4	Back-to-back switching of filters or shunt capacitors .....	36
7.3.5	Short time overload – reasonable specification of requirements .....	36
7.3.6	Low voltage filter capacitors without fuses .....	37
7.4	Filters for special purposes.....	38
7.4.1	Harmonic filters for damping transient overvoltages .....	38
7.4.2	Non-linear filters for low order harmonics/transient overvoltages .....	38
7.4.3	Series filters for HVDC converter stations .....	39
7.4.4	Re-tunable AC filters.....	42
7.5	Impact of new HVDC station in vicinity of an existing station .....	43
7.6	Redundancy issues and spares .....	44
7.6.1	Redundancy of filters – Savings in ratings and losses .....	44
7.6.2	Internal filter redundancy.....	45
7.6.3	Spare parts.....	45
8	Protection.....	46
8.1	Overview.....	46
8.2	General.....	46
8.3	Bank and sub-bank overall protection .....	48
8.3.1	General .....	48
8.3.2	Short-circuit protection .....	48
8.3.3	Overcurrent protection .....	48
8.3.4	Thermal overload protection .....	48
8.3.5	Differential protection.....	49
8.3.6	Earth fault protection.....	49
8.3.7	Overvoltage and undervoltage protection.....	49
8.3.8	Special protection functions and harmonic measurements.....	50
8.3.9	Busbar and breaker failure protection .....	50
8.4	Protection of individual filter components .....	50
8.4.1	Unbalance protection for filter and shunt capacitors .....	50
8.4.2	Protection of low voltage tuning capacitors .....	52
8.4.3	Overload protection and detection of filter detuning .....	52
8.4.4	Temperature measurement for protection .....	52
8.4.5	Measurement of fundamental frequency components .....	52
8.4.6	Capacitor fuses.....	53
8.4.7	Protection and rating of instrument transformers.....	53
8.4.8	Examples of protection arrangements.....	54
8.5	Personnel protection .....	54
9	Audible noise.....	57
9.1	General.....	57

9.2	Sound active components of AC filters.....	57
9.3	Sound requirements .....	59
9.4	Noise reduction .....	59
10	Seismic requirements .....	60
10.1	General.....	60
10.2	Load specification .....	61
10.2.1	Seismic loads .....	61
10.2.2	Additional loads .....	62
10.2.3	Soil quality.....	62
10.3	Method of qualification .....	62
10.3.1	General .....	62
10.3.2	Qualification by analytical methods.....	62
10.3.3	Design criteria.....	63
10.3.4	Documentation for qualification by analytical methods.....	64
10.4	Examples of improvements in the mechanical design .....	64
11	Equipment design and test parameters.....	64
11.1	General.....	64
11.1.1	Technical information and requirements .....	64
11.1.2	Technical information to be provided by the customer .....	65
11.1.3	Customer requirements .....	65
11.1.4	Technical information to be presented by the bidders.....	67
11.1.5	Ratings.....	67
11.2	Capacitors .....	68
11.2.1	General .....	68
11.2.2	Design aspects .....	68
11.2.3	Electrical data .....	71
11.2.4	Tests .....	72
11.3	Reactors .....	72
11.3.1	General .....	72
11.3.2	Design aspects .....	73
11.3.3	Electrical data .....	73
11.3.4	Tests .....	74
11.4	Resistors .....	75
11.4.1	General .....	75
11.4.2	Design aspects .....	75
11.4.3	Electrical data .....	76
11.4.4	Tests .....	77
11.5	Arresters.....	78
11.5.1	General .....	78
11.5.2	Design aspects .....	79
11.5.3	Electrical data .....	79
11.5.4	Arresters: tests .....	80
11.6	Instrument transformers .....	80
11.6.1	Voltage transformers.....	80
11.6.2	Current transformers.....	81
11.7	Filter switching equipment.....	83
11.7.1	<del>Filter switching equipment: Introduction</del> General.....	83
11.7.2	Design aspects .....	83
11.7.3	Electrical data .....	86

11.7.4 Test requirements .....	87
<del>Annex A (informative) Background to loss evaluation .....</del>	<del>91</del>
Annex A (informative) Example of seismic response spectra (from IEEE Std 693-2005).....	91
Bibliography .....	92
Figure 1 – Circuit for rating evaluation.....	10
Figure 2 – Inrush current into a 12/24 <sup>th</sup> double-tuned filter .....	20
Figure 3 – Voltage across the low voltage capacitor of a 12/24 <sup>th</sup> double-tuned filter at switch-on.....	21
Figure 4 – Voltage across the HV capacitor bank of a 12/24 <sup>th</sup> double-tuned filter under fault conditions .....	22
Figure 5 – Typical arrangements of surge arresters .....	24
Figure 6 – Non-linear low order filter for Vienna Southeast HVDC station.....	39
Figure 7 – Single-tuned series filter and impedance plot.....	40
Figure 8 – Triple-tuned series filter and impedance plot.....	40
Figure 9 – Mixed series and shunt AC filters at Uruguaiana HVDC station.....	41
Figure 10 – Re-tunable AC filter branch.....	43
Figure 11 – Example of a protection scheme for an unearthed shunt capacitor.....	55
Figure 12 – Example of a protection scheme for a C-type filter.....	56
Figure 13 – Electrical spectrum .....	58
Figure 14 – Force spectrum .....	58
Figure 15 – Comparison of internal, fuseless and external fused capacitor unit designs.....	70
Figure A.1 – Seismic response spectra.....	91
Table 1 – Typical losses in an all-film capacitor unit .....	26
Table 2 – Electrical data for capacitors.....	71
Table 3 – Electrical data for reactors .....	74
Table 4 – Electrical data for resistors .....	76
Table 5 – Electrical data for arresters.....	80
Table 6 – Electrical data for current transformers .....	82
Table 7 – Electrical data for filter switching equipment.....	87
<del>Table A.1 – Capitalized costs of the future losses .....</del>	<del>91</del>

## INTERNATIONAL ELECTROTECHNICAL COMMISSION

# HIGH-VOLTAGE DIRECT CURRENT (HVDC) SYSTEMS – GUIDANCE TO THE SPECIFICATION AND DESIGN EVALUATION OF AC FILTERS –

## Part 4: Equipment

### FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

**This redline version of the official IEC Standard allows the user to identify the changes made to the previous edition IEC TR 62001-4:2016. A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text.**



IEC TR 62001-4 has been prepared by subcommittee 22F: Power electronics for electrical transmission and distribution systems, of IEC technical committee 22: Power electronic systems and equipment. It is a Technical Report.

This second edition cancels and replaces the first edition published in 2016. This edition constitutes a technical revision. This edition includes the following significant technical change with respect to the previous edition:

- a) general updating of the document to reflect changes in practice;
- b) Annex A deleted as its content is covered by IEC 61803.

The text of this Technical Report is based on the following documents:

Draft	Report on voting
22F/615/DTR	22F/622B/RVDTR

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this Technical Report is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at [www.iec.ch/members\\_experts/refdocs](http://www.iec.ch/members_experts/refdocs). The main document types developed by IEC are described in greater detail at [www.iec.ch/standardsdev/publications](http://www.iec.ch/standardsdev/publications).

A list of all parts in the IEC TR 62001 series, published under the general title *High-voltage direct current (HVDC) systems – Guidance to the specification and design evaluation of AC filters*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under [webstore.iec.ch](http://webstore.iec.ch) in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

**IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.**

## INTRODUCTION

The IEC TR 62001 series is structured in ~~four~~ five parts:

### IEC TR 62001-1 – Overview

This part concerns specifications of AC filters for high-voltage direct current (HVDC) systems with line-commutated converters, permissible distortion limits, harmonic generation, filter arrangements, filter performance calculation, filter switching and reactive power management and customer specified parameters and requirements.

### IEC TR 62001-2 – Performance

This part deals with current-based interference criteria, ~~design issues and special applications~~, field measurements and verification.

### IEC TR 62001-3 – Modelling

This part addresses the harmonic interaction across converters, pre-existing harmonics, AC network impedance modelling, simulation of AC filter performance.

### IEC TR 62001-4 – Equipment

This part concerns steady-state and transient ratings of AC filters and their components, power losses, audible noise, design issues and special applications, filter protection, seismic requirements, equipment design and test parameters.

### IEC TR 62001-5 – AC side harmonics and appropriate harmonic limits for HVDC systems with voltage sourced converters (VSC)

This part concerns specific issues of AC filter design related to high-voltage direct current (VSC) systems with voltage sourced converters (HVDC).

# HIGH-VOLTAGE DIRECT CURRENT (HVDC) SYSTEMS – GUIDANCE TO THE SPECIFICATION AND DESIGN EVALUATION OF AC FILTERS –

## Part 4: Equipment

### 1 Scope

This part of IEC TR 62001, which is a Technical Report, provides guidance on the basic data of AC side filters for high-voltage direct current (HVDC) systems and their components such as ratings, power losses, design issues and special applications, protection, seismic requirements, equipment design and test parameters.

This document covers AC side filtering for the frequency range of interest in terms of harmonic distortion and audible frequency disturbances. It excludes filters designed to be effective in the power line carrier (PLC) and radio interference spectra.

It concerns the conventional AC filter technology and LCC (line-commutated converter) HVDC ~~converters~~ but much of this applies to any filter equipment for VSC (voltage sourced converter) HVDC.

### 2 Normative references

There are no normative references in this document.

### 3 Terms and definitions

No terms and definitions are listed in this document.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

### 4 Steady state rating


#### 4.1 General

The calculation of the steady state ratings of the harmonic filter equipment is the responsibility of the contractor. Clause 4 gives guidance on the calculation of equipment rating parameters and the different factors to be considered in the studies. It is the responsibility of the customer to provide the appropriate system and environmental data and also to clarify the operational conditions, such as filter outages and network contingencies, which need to be taken into account.

## 4.2 Calculation method

### 4.2.1 General

Steady state rating of filter equipment for an LCC HVDC system is based on a solution of the following circuit which represents the HVDC converter, the filter banks and the AC supply system. See Figure 1.

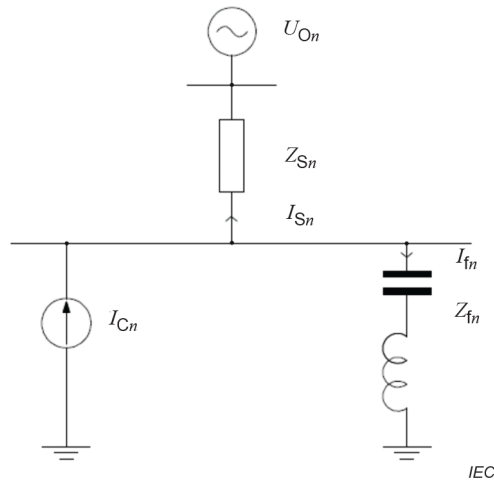

NOTE The symbols used in this figure are explained in the key to Formula (1).

**Figure 1 – Circuit for rating evaluation**

The harmonic current flowing in the filter is the summation of two components, the contribution from the HVDC converter and the contribution from the AC supply network.

Using the principle of superposition, Formula (1) and Formula (2) can be used to evaluate the contribution to the harmonic filter current of order  $n$  from these two sources.

a) HVDC converter:

$$I_{fn}^i = \frac{Z_{Sn}}{Z_{Sn} + Z_{fn}} \cdot I_{Cn} \quad (1)$$

where

$I_{fn}^i$  is the filter harmonic current from the converter;

$I_{Cn}$  is the converter harmonic current;

$I_{Sn}$  is the system harmonic current;

$Z_{fn}$  is the filter harmonic impedance;

$Z_{Sn}$  is the network harmonic impedance.

b) AC supply network:

$$I_{fn}^{ii} = \frac{U_{On}}{Z_{Sn} + Z_{fn}} \quad (2)$$

where

$I_{fn}^{ii}$  is the filter harmonic current from the system;

$U_{On}$  is the existing system harmonic voltage.

The definition of network impedance is described in 4.5.

To solve Formula (1) and Formula (2), the following independent variables need to be known.

- The harmonic current ( $I_{cn}$ ) produced by the rectifier or inverter of the HVDC station. It is calculated for all harmonics (see IEC TR 62001-1 [1]<sup>1</sup> or CIGRE Technical Brochure 754 [2] for VSC using a harmonic voltage source). This evaluation should consider the worst-case operating conditions which can occur in steady state conditions, i.e. for periods in excess of 1 min. The extreme tolerance range of key parameters, for example converter transformer impedances or operating range of the tap changer, needs to be taken into account. Harmonic interaction phenomena as discussed in IEC TR 62001-3 [3] should also be taken into account.
- The pre-existing system harmonic voltage, as discussed in 4.2.2.
- The harmonic impedance of AC network ( $Z_{sn}$ ), as discussed in IEC TR 62001-1 [1]. Note that different values of  $Z_{sn}$  can be defined for the calculation of  $I_{fn}^i$  and  $I_{fn}^{ii}$ , depending on how the pre-existing harmonic distortion is specified (see 4.2.3).

The harmonic impedance of the filter ( $Z_{fn}$ ) needs to take account of the de-tuning and tolerance factors discussed in 4.4.

In the case of an HVDC link connecting two AC systems of different fundamental frequencies, and particularly if the link is a back-to-back station, both converters may generate currents on their AC sides at frequencies other than harmonics of the fundamental. The fundamental frequencies may either be nominally different, for example 50 Hz and 60 Hz, or may be nominally identical but differ at times by up to 1 Hz or 2 Hz. This additional generated distortion (interharmonics) will be at frequencies which are harmonics of the fundamental frequency of the remote AC system, and will be transferred across the link. Interharmonics may give rise to specific problems not found with true harmonics, such as

- a) interference with ripple control systems, and
- b) light flicker due to the low frequency amplitude modulation caused by the beating of a harmonic frequency with an adjacent interharmonic.

EXAMPLE A 10 Hz flicker due to the interaction of a 650 Hz 13<sup>th</sup> harmonic of a 50 Hz system with 660 Hz 11<sup>th</sup> harmonic penetration from a 60 Hz system.

The effect of interharmonics (see IEC TR 62001-1 [1]), although small, should also be taken into account in the calculation of filter component rating.

#### 4.2.2 AC system pre-existing harmonics

It is important that the effects of pre-existing harmonic distortion on the AC system are included in the filter rating calculations. ~~Conventionally,~~ In many early HVDC projects this was accommodated not by direct calculation as shown in 4.2.1 but by creating an arbitrary margin of a 10 % to 20 % increase in converter harmonic currents ( $I_{cn}$ ). However, such an approach may not adequately reflect the low order harmonic distortion (typically 3<sup>rd</sup>, 5<sup>th</sup> and 7<sup>th</sup>) which exists on many power systems. As modern converter stations produce only small amounts of such low order harmonics, a simple enhancement of the magnitude may not adequately reflect their potential contribution to filter ratings.

To model a multiplicity of harmonic current sources in a detailed network model is impractical for the purposes of filter design. ~~Therefore, it is proposed that~~ Often a Thévenin equivalent voltage source is modelled behind the AC system impedance, as shown in Figure 1, to create an open circuit voltage distortion at the filter busbar, i.e. the level of distortion prior to connection of the filters. The magnitude of the individual harmonic voltages can be based on measurements or on the performance limits, but limited by a value of total harmonic distortion. This approach provides a more realistic assessment of the contribution to equipment rating caused by ambient distortion levels.

<sup>1</sup> Numbers in square brackets refer to the Bibliography.

IEC TR 61001-3 [3] contains a detailed discussion on alternative ways of handling pre-existing harmonics.

#### 4.2.3 Combination of converter and pre-existing harmonics

As there is no fixed vectorial relationship between  $I_{fn}^i$  and  $I_{fn}^{ii}$ , ~~it is proposed~~ one option is that these individual contributions to filter rating are summated on root sum square (RSS) basis at each harmonic:

$$I_{fn} = \sqrt{I_{fn}^i{}^2 + I_{fn}^{ii}{}^2} \quad (3)$$

Alternatively, the general summation law from IEC 61000-3-6 [4] may be used.

For pre-existing harmonics of relatively low magnitude, RSS summation is reasonable, as some harmonics may be in phase and others not, and as these relationships will vary with time and operating conditions.

Alternatively, linear addition would provide greater security against the possibility of the contributions at a significant frequency being approximately in phase, but would entail an increase in cost, particularly if used for the voltage rating of the high voltage capacitors.

Linear addition should be considered for any pre-existing individual harmonic of such magnitude that linear addition would significantly affect the current rating of the components. Otherwise, if in practice the two sources were in phase for a period of time, the filter could trip on overcurrent protection. If linear addition is to be used, care should be taken to ensure that the conditions under which the two currents are calculated are consistent, i.e. the calculated currents can occur simultaneously in practice.

#### 4.2.4 Equipment rating calculations

##### 4.2.4.1 General

The total filter current is derived as in 4.2.3 for each harmonic order ~~from 2<sup>nd</sup> to 50<sup>th</sup> inclusive~~ of significant magnitude. Traditionally for LCC HVDC systems, the maximum harmonic order was generally taken as 49 or 50. However with the increasing prevalence of high power electronic equipment, higher values of the maximum harmonic order may be considered. For LCC it is important that this range is covered to ensure that any resonance conditions between the filters and the AC network and between different filters are inherently considered. ~~Harmonics above the 50<sup>th</sup> order are unlikely to have a significant impact on the total rating values and can be ignored.~~

The calculation of  $I_{fn}$  for each connected filter allows the spectrum of harmonic currents in each branch of the filter to be evaluated. From this current data, individual element ratings can be calculated.

##### 4.2.4.2 Capacitors

From the spectrum of currents in the capacitor bank ( $I_{fcn}$ ), the total RSS current can be calculated as

$$I_c = \sqrt{\sum_{n=1}^{n=49} (I_{fcn})^2}$$