

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Fibre optic interconnecting devices and passive components – Basic test and measurement procedures –
Part 3-45: Examinations and measurements – Attenuation of random mated multi-fibre connectors**

Dispositifs d'interconnexion et composants passifs fibroniques – Procédures fondamentales d'essais et de mesures –

Partie 3-45: Examens et mesures – Affaiblissement dû à l'accouplement sans choix préalable de connecteurs multifibres



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2023 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Secretariat
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 300 terminological entries in English and French, with equivalent terms in 19 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC -

webstore.iec.ch/advsearchform

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études, ...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

Découvrez notre puissant moteur de recherche et consultez gratuitement tous les aperçus des publications. Avec un abonnement, vous aurez toujours accès à un contenu à jour adapté à vos besoins.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 300 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 19 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Fibre optic interconnecting devices and passive components – Basic test and measurement procedures –
Part 3-45: Examinations and measurements – Attenuation of random mated multi-fibre connectors**

Dispositifs d'interconnexion et composants passifs fibroniques – Procédures fondamentales d'essais et de mesures –

Partie 3-45: Examens et mesures – Affaiblissement dû à l'accouplement sans choix préalable de connecteurs multifibres

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 33.180.20

ISBN 978-2-8322-7151-3

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

CONTENTS

| | |
|--|----|
| FOREWORD..... | 3 |
| 1 Scope..... | 5 |
| 2 Normative references | 5 |
| 3 Terms and definitions | 5 |
| 4 General description | 6 |
| 4.1 Test methods | 6 |
| 4.2 Precautions..... | 7 |
| 5 Apparatus..... | 7 |
| 5.1 Launch conditions and light source (LS)..... | 7 |
| 5.2 Detector (D)..... | 8 |
| 6 Procedure..... | 9 |
| 6.1 Method 1..... | 9 |
| 6.2 Method 2..... | 11 |
| 7 Calculation and analysis | 15 |
| 8 Details to be specified and reported..... | 15 |
| Annex A (normative) Requirements for launch fibre and launch plug for multimode measurement..... | 16 |
| Bibliography..... | 17 |
| Figure 1 – Reference power measurement system – Method 1 | 9 |
| Figure 2 – Attenuation measurement system – Method 1 | 9 |
| Figure 3 – Test matrix and labelling for measuring Method 1 (2-fibre connector)..... | 10 |
| Figure 4 – Test matrix and labelling for measuring Method 1 (4-fibre connector)..... | 11 |
| Figure 5 – Test matrix and labelling for measuring Method 1 (8-, 10-, 12- and > 12-fibre connectors)..... | 11 |
| Figure 6 – Reference power measurement system (1) – Method 2 | 12 |
| Figure 7 – Attenuation measurement system (1) – Method 2 | 12 |
| Figure 8 – Reference power measurement system (2) – Method 2 | 13 |
| Figure 9 – Attenuation measurement system (2) – Method 2..... | 13 |
| Figure 10 – Test matrix and labelling for measuring Method 2 (2-fibre connector)..... | 14 |
| Figure 11 – Test matrix and labelling for measuring Method 2 (4-fibre connector)..... | 14 |
| Figure 12 – Test matrix and labelling for measuring Method 2 (8-, 10-, 12- and > 12-fibre connectors)..... | 15 |
| Figure A.1 – Attenuation measurement system | 16 |
| Table 1 – Sample size for Method 1 | 6 |
| Table 2 – Sample size for Method 2 | 7 |
| Table 3 – Preferred source conditions..... | 8 |
| Table A.1 – Requirements for launch fibre and launch plug..... | 16 |

INTERNATIONAL ELECTROTECHNICAL COMMISSION

FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS – BASIC TEST AND MEASUREMENT PROCEDURES –**Part 3-45: Examinations and measurements – Attenuation of random mated multi-fibre connectors**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 61300-3-45 has been prepared by subcommittee 86B: Fibre optic interconnecting devices and passive components, of IEC technical committee 86: Fibre optics. It is an International Standard.

This second edition cancels and replaces the first edition published in 2011. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) addition of sample size for > 12-fibre connector measurement;
- b) inclusion of guidance for multimode measurement.

The text of this International Standard is based on the following documents:

| Draft | Report on voting |
|---------------|------------------|
| 86B/4757/FDIS | 86B/4774/RVD |

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

A list of all parts in the IEC 61300 series, published under the general title *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

iTeh Standards

(<https://standards.itih.ai>)

Document Preview

[IEC 61300-3-45:2023](https://standards.itih.ai/catalog/standards/iec/7d0a1bce-3198-4759-8c41-76c392892608/iec-61300-3-45-2023)

<https://standards.itih.ai/catalog/standards/iec/7d0a1bce-3198-4759-8c41-76c392892608/iec-61300-3-45-2023>

FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS – BASIC TEST AND MEASUREMENT PROCEDURES –

Part 3-45: Examinations and measurements – Attenuation of random mated multi-fibre connectors

1 Scope

The purpose of this part of IEC 61300 is to describe the procedure required to measure the statistical distribution and mean attenuation for random mated optical connectors with physical contact (PC) and angled physical contact (APC) polished multi-fibre rectangular ferrules as defined in the IEC 61754 series. This measurement method is applicable to cable assemblies.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61300-1, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 1: General and guidance*

IEC 61300-3-1, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-1: Examinations and measurements – Visual examination*

IEC 61300-3-35, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-35: Examinations and measurements – Visual inspection of fibre optic connectors and fibre-stub transceivers*

IEC 61754 (all parts), *Fibre optic interconnecting devices and passive components – Fibre optic connector interfaces*

IEC 63267 (all parts), *Fibre optic interconnecting devices and passive components – Connector optical interfaces for enhanced macro bend loss multimode fibres*

3 Terms and definitions

No terms and definitions are listed in this document.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

4 General description

4.1 Test methods

Two test methods are described for measuring the attenuation of random mated optical connectors. Both provide an estimate of the expected average performance that a group of cable assemblies (including an adaptor, if applicable) will exhibit when used in an optical system. The device under test (DUT) is a cable assembly with on one side a plug with pins (pinned plug) and on the other side a plug without pins (unpinned plug). The cable assemblies, and any adaptors, shall be chosen at random to ensure that the measurements provide a statistically unbiased estimate.

Method 1 describes a procedure using a sample of cable assemblies and adaptors specified in Table 1. In this case the pinned plugs are used as "launch test plugs" and the unpinned plugs are tested against them sequentially. The results, based on the number of measurements specified in Table 1, are recorded in the test matrix shown in Figure 3 to Figure 5.

Method 2 describes a procedure for the measurement of a sample of cable assemblies and adaptors specified in Table 2. Three cable assemblies are selected from the sample as "launch test cords" and the remaining cable assemblies are grouped as "receive test cords". First, the pinned plugs of the launch test cords are used as launch test plugs and the unpinned plugs of the receive test cords are tested against them sequentially. Then the unpinned plugs of the launch test cords are used as launch test plugs and the pinned plugs of the receive test cords are tested. This produces the number of measurements specified in Table 2 and the results are recorded in the test matrix shown in Figure 10 to Figure 12.

Method 1 is intended to be part of a design approval exercise that can involve one or more suppliers. It is recognised that the number of measurements required by Method 1 can be excessive for day-to-day routine checking of either in-house or supplier produced products. In this case, once approval is achieved, Method 2 would be relied on to maintain process control as an alternative option. However, in the event of a dispute, Method 1 shall act as the reference measurement method.

IEC 61300-3-45:2023

NOTE In this measurement method, the term "launch test cord" is used to define one of the mated DUTs which is installed on the light source side. On the other hand, the other DUT which is installed on the detector side is defined as "receive test cord". In the same way, the plugs mated at the connection point under test are defined as "launch test plug" and "receive test plug", respectively. "Launch test plug" and "launch test cord" are used to define those components chosen at random from the sample, against which a number of comparative measurements are made. It is not intended that the terms imply specially chosen or manufactured components, such as those used, for example, in screen testing.

Table 1 – Sample size for Method 1

| Connectors (<i>n</i> -fibre connector) | Sample sizes | | |
|--|--------------------|--------------|--------------|
| | Cords and adaptors | Measurements | Fibres |
| 2-fibre connector | 15 | 210 | 420 |
| 4-fibre connector | 12 | 132 | 528 |
| 8-fibre connector | 10 | 90 | 720 |
| 10-fibre connector | 10 | 90 | 900 |
| 12-fibre connector | 10 | 90 | 1 080 |
| > 12-fibre connector | 10 | 90 | 90* <i>n</i> |

NOTE Parameter *n* is the number of fibres in the connector.

Table 2 – Sample size for Method 2

| Connectors (<i>n</i> -fibre connector) | Sample sizes | | | | | |
|---|--------------|------------------|-------------------|----------|--------------|--------------|
| | Cords | | | Adaptors | Measurements | Fibres |
| | Total | Launch test cord | Receive test cord | | | |
| 2-fibre connector | 12 | 3 | 9 | 3 | 54 | 108 |
| 4-fibre connector | 8 | 3 | 5 | 3 | 30 | 120 |
| 8-fibre connector | 6 | 3 | 3 | 3 | 18 | 144 |
| 10-fibre connector | 6 | 3 | 3 | 3 | 18 | 150 |
| 12-fibre connector | 6 | 3 | 3 | 3 | 18 | 216 |
| > 12-fibre connector | 6 | 3 | 3 | 3 | 18 | 18* <i>n</i> |

NOTE Parameter *n* is the number of fibres in the connector.

4.2 Precautions

The following test requirements shall be met.

- The cladding modes shall not affect the measurement. Cladding modes shall be stripped as a function of the fibre coating.
- The fibres in the test shall remain fixed between the reference power measurement and the corresponding attenuation measurements to avoid changes in attenuation due to bending losses.
- The stability performance of the test equipment shall be $\leq 0,05$ dB or 10 % of the attenuation to be measured, whichever is the lower value. The stability shall be maintained over the measurement time and operational temperature range. The required measurement resolution shall be 0,01 dB for both multimode and single-mode.
- To achieve consistent results, inspect all connectors and adaptors prior to the setup of the measurement system and if contaminated clean them. During measurement steps, inspect all connectors and adaptors except those in the unchanged connections and if contaminated clean them before mating. Visual examination shall be undertaken in accordance with IEC 61300-3-1 and IEC 61300-3-35.

NOTE A cladding mode stripper usually comprises a material having a refractive index equal to or greater than that of the fibre cladding.

5 Apparatus

5.1 Launch conditions and light source (LS)

The source unit consists of an optical emitter, the associated drive electronics, and fibre pigtail (if any). Preferred source conditions are given in Table 3. The stability of the single-mode fibre source at 23 °C shall be $\pm 0,01$ dB over the duration of the measurement. The stability of the multimode fibre source at 23 °C shall be $\pm 0,05$ dB over the duration of the measurement. The source output power shall be ≥ 20 dB above the minimum measurable power level.

Table 3 – Preferred source conditions

| No. | Type | Central wavelength nm | Spectral width (RMS) nm | Source type |
|-----|-------------|--------------------------|----------------------------|------------------------------------|
| S1 | Multimode | 660 ± 30 | ≥ 10 | Monochromator or LED |
| S2 | Multimode | 780 ± 30 | ≥ 10 | Monochromator or LED |
| S3 | Multimode | 850 ± 30 | ≥ 10 | Monochromator or LED |
| S4 | Multimode | 1 300 ± 30 | ≥ 10 | Monochromator or LED |
| S5 | Single-mode | 1 310 ± 30 | To be reported | Laser diode, monochromator, or LED |
| S6 | Single-mode | 1 550 ± 30 | To be reported | Laser diode, monochromator, or LED |
| S7 | Single-mode | 1 625 ± 30 | To be reported | Laser diode, monochromator, or LED |

It is recognized that some components, for example for coarse wavelength division multiplexing (CWDM), can require the use of other source types such as tunable lasers. It is therefore recommended in these cases that the preferred source characteristics are specified on the basis of the component to be measured.

NOTE Central wavelength and spectral width are defined in IEC 61280-1-3.

The launch condition shall be specified in accordance with IEC 61300-1. In case the specified launch condition is not obtained by the original light from the source, an appropriate apparatus for launch condition control (E) shall be used.

The interference of modes from a coherent source will create speckle patterns in multimode fibres. These speckle patterns give rise to speckle or modal noise and are observed as power fluctuations, since their characteristic times are longer than the resolution time of the detector. As a result, stable launch conditions cannot be achieved using coherent sources for multimode measurements. Consequently, lasers, including optical time domain reflectometer (OTDR) sources, should be avoided in favour of LEDs or other incoherent sources for measuring multimode components.

5.2 Detector (D)

The detector consists of an optical detector, the means to connect to it and associated electronics. The connection to the detector will be an adaptor that accepts a connector plug of the appropriate design. The detector shall capture all light emitted by the connector plug.

In addition to meeting the stability and resolution requirements, the detector shall have the following characteristics:

- linearity of multimode, $\leq \pm 0,25$ dB (over -5 dBm up to -60 dBm);
- linearity of single-mode, $\leq \pm 0,1$ dB (over -5 dBm up to -60 dBm).

The detector linearity should be referenced to a power level of -23 dBm at the operational wavelength.


Where the connection to the detector is broken between the reference power measurement and the corresponding attenuation measurements, the measurement repeatability shall be within $0,05$ dB or 10% of the attenuation to be measured, whichever is the lower value. A large sensitive area detector can be used to achieve this.

The precise characteristics of the detector shall be compatible with the measurement requirements. The dynamic range of the detector shall be capable of measuring the power level exiting from the device under test (DUT) at the wavelength being measured.

6 Procedure

6.1 Method 1

- Randomly select the sample number of cable assemblies specified in Table 1. Sequentially label the cable assemblies and plugs under test as shown in Figure 3 to Figure 5.
- Randomly select the sample size of adaptors as specified in Table 1. Sequentially label the adaptors under test as shown in Figure 3 to Figure 5.
- Set up the reference power measurement system as shown in Figure 1, with cord 1 as the launch test cord and plug 1 (pinned) as the launch test plug. Measure power P_{1-1} to P_{1-n} for all fibres in the cord. For multimode measurement, tight tolerance fibre and tight tolerance plug as specified in Annex A shall be used for the launch plug. The launch condition at the launch plug shall comply with IEC 61300-1.

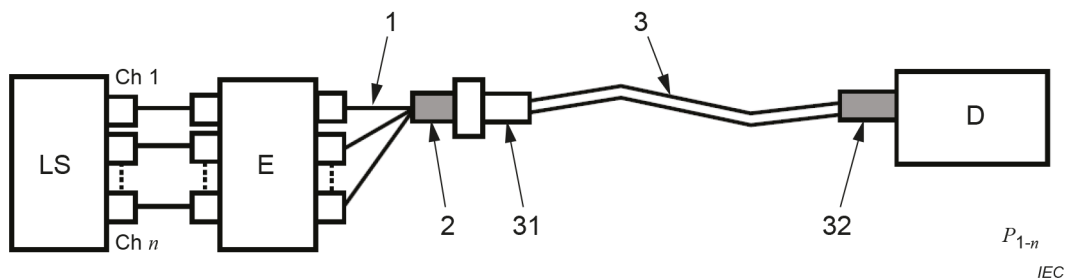


Key

| | | | |
|----|--------------------------|----|---|
| LS | light source | 3 | launch test cord |
| E | launch condition control | 31 | unpinned plug of launch test cord |
| 1 | fan-out cord | 32 | pinned plug of launch test cord (launch test plug) |
| 2 | launch plug | | |

Figure 1 – Reference power measurement system – Method 1

- Pick up cord 2 as the receive test cord. Mate plug 1 (pinned) to plug 2 (unpinned) using adaptor 1 as shown in Figure 2. Measure the power P_{2-1} to P_{2-n} for all fibres in the cord.

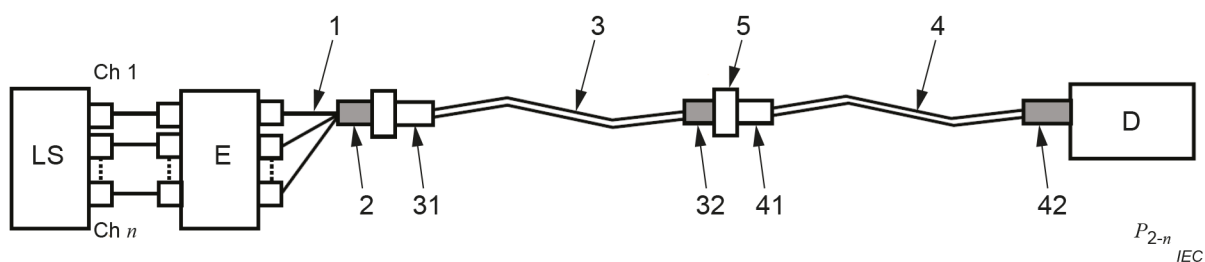

Key

| | | | |
|----|---|----|---|
| LS | light source | 4 | receive test cord |
| E | launch condition control | 41 | unpinned plug of receive test cord (receive test plug) |
| 1 | fan-out cord | 42 | pinned plug of receive test cord |
| 2 | launch plug | 5 | adaptor |
| 3 | launch test cord | | |
| 31 | unpinned plug of launch test cord | | |
| 32 | pinned plug of launch test cord (launch test plug) | | |

Figure 2 – Attenuation measurement system – Method 1

- e) Calculate the attenuation A of the mated plug pair 1 (pinned)/2 (unpinned) with adaptor 1, using Formula (1):

$$A = \left[-10 \log \left(\frac{P_{2-i}}{P_{1-i}} \right) \right] - (A_f \times L) \text{ dB} \tag{1}$$

where

- A is the attenuation;
- i is the number of fibres of the test cord;
- A_f is the fibre attenuation per kilometre;
- L is the length of the fibre in kilometre.

The product $A_f \times L$ depends on the fibre attenuation level and can be neglectable when it is small enough compared to the connection losses.

- f) Record the attenuation results for each fibre into an appropriate matrix format.
- g) Keeping plug 1 (pinned) as the launch test plug, replace cord 2 with cord 3 and mate plug 3 (unpinned) to plug 1 (pinned) using adaptor 1.
- h) Measure the power P_{3-1} to P_{3-n} and record the attenuation results for each fibre.
- i) Repeat steps g) and h) until all the unpinned plugs of the remaining cable assemblies have been tested against the launch test plug 1 (pinned).
- j) After step i) has been completed, replace the launch test cord and the adaptor so that plug 2 (pinned) is used as the launch test plug. Measure the reference power for the configuration.
- k) Measure the attenuation for all plugs (unpinned) against the launch test plug 2 (pinned) using adaptor 2.
- l) Continue this process until all allocated plugs (pinned) have been used as launch test plugs.

| Launch test cord and adaptor | | | Receive test cord Plug (unpinned) as receive test plug | | | | | | | | | | | | | | |
|------------------------------|------------------|------------|---|---|---|---|---|---|---|---|---|----|----|----|----|----|----|
| Cord | Launch test plug | Adaptor | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 |
| 1 | Plug 1 (pinned) | Adaptor 1 | — | | | | | | | | | | | | | | |
| 2 | Plug 2 (pinned) | Adaptor 2 | | — | | | | | | | | | | | | | |
| 3 | Plug 3 (pinned) | Adaptor 3 | | | — | | | | | | | | | | | | |
| 4 | Plug 4 (pinned) | Adaptor 4 | | | | — | | | | | | | | | | | |
| 5 | Plug 5 (pinned) | Adaptor 5 | | | | | — | | | | | | | | | | |
| 6 | Plug 6 (pinned) | Adaptor 6 | | | | | | — | | | | | | | | | |
| 7 | Plug 7 (pinned) | Adaptor 7 | | | | | | | — | | | | | | | | |
| 8 | Plug 8 (pinned) | Adaptor 8 | | | | | | | | — | | | | | | | |
| 9 | Plug 9 (pinned) | Adaptor 9 | | | | | | | | | — | | | | | | |
| 10 | Plug 10 (pinned) | Adaptor 10 | | | | | | | | | | — | | | | | |
| 11 | Plug 11 (pinned) | Adaptor 11 | | | | | | | | | | | — | | | | |
| 12 | Plug 12 (pinned) | Adaptor 12 | | | | | | | | | | | | — | | | |
| 13 | Plug 13 (pinned) | Adaptor 13 | | | | | | | | | | | | | — | | |
| 14 | Plug 14 (pinned) | Adaptor 14 | | | | | | | | | | | | | | — | |
| 15 | Plug 15 (pinned) | Adaptor 15 | | | | | | | | | | | | | | | — |

IEC

Figure 3 – Test matrix and labelling for measuring Method 1 (2-fibre connector)