

INTERNATIONAL STANDARD

NORME INTERNATIONALE



Specification for high-voltage fuse-links for motor circuit applications

Spécification relative aux éléments de remplacement à haute tension destinés à des circuits comprenant des moteurs

IEC 60644:2009

<https://standards.iteh.ai/catalog/standards/iec/a43ef5c7-5962-42d2-ab8a-64b5f190d384/iec-60644-2009>



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2019 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

67 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC -

webstore.iec.ch/advsearchform

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études,...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

Electropedia - www.electropedia.org

Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 000 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 16 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

Glossaire IEC - std.iec.ch/glossary

67 000 entrées terminologiques électrotechniques, en anglais et en français, extraites des articles Termes et Définitions des publications IEC parues depuis 2002. Plus certaines entrées antérieures extraites des publications des CE 37, 77, 86 et CISPR de l'IEC.

INTERNATIONAL STANDARD

NORME INTERNATIONALE



Specification for high-voltage fuse-links for motor circuit applications

Spécification relative aux éléments de remplacement à haute tension destinés à des circuits comprenant des moteurs

[IEC 60644:2009](https://standards.iteh.ai/standards/iec/a43ef5c7-5962-42d2-ab8a-64b5f190d384/iec-60644-2009)

<https://standards.iteh.ai/catalog/standards/iec/a43ef5c7-5962-42d2-ab8a-64b5f190d384/iec-60644-2009>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 29.120.50

ISBN 978-2-8322-7425-5

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

REDLINE VERSION

VERSION REDLINE



Specification for high-voltage fuse-links for motor circuit applications

Spécification relative aux éléments de remplacement à haute tension destinés à des circuits comprenant des moteurs

IEC 60644:2009

<https://standards.iteh.ai/catalog/standards/iec/a43ef5c7-5962-42d2-ab8a-64b5f190d384/iec-60644-2009>

CONTENTS

FOREWORD	3
1 Scope	5
2 Normative references	5
3 Fuse-link time-current characteristics	5
4 <i>K</i> factor	6
5 Withstand requirements	7
6 Withstand tests	7
6.1 General	7
6.2 Test sequence No. 1	7
6.3 Test sequence No. 2	7
6.4 Interpretation of the test results	8
7 Information to be given to the user	9
8 Selection of fuse-links for motor circuit applications and correlation of fuse-link characteristics with those of other components of the circuit.....	9
8.1 Selection of fuse links	9
8.2 Co-ordination with other circuit components	9
Bibliography	9
Figure 1 – Diagrams of the test sequences	8
Figure 2 – Determination of <i>K</i> factor for fuse-links of intermediate rating of a homogeneous series	9
Figure 3 – Characteristics relating to the protection of a motor circuit	9

IEC 60644:2009

<https://standards.iteh.ai/catalog/standards/iec/a43ef5c7-5962-42d2-ab8a-64b5f190d384/iec-60644-2009>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

SPECIFICATION FOR HIGH-VOLTAGE FUSE-LINKS FOR MOTOR CIRCUIT APPLICATIONS

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This consolidated version of the official IEC Standard and its amendment has been prepared for user convenience.

IEC 60644 edition 2.1 contains the second edition (2009-08) [documents 32A/267/CDV and 32A/270/RVC] and its amendment 1 (2019-09) [documents 32A/340/CDV and 32A/343/RVC].

In this Redline version, a vertical line in the margin shows where the technical content is modified by amendment 1. Additions are in green text, deletions are in strikethrough red text. A separate Final version with all changes accepted is available in this publication.

International Standard IEC 60644 has been prepared by subcommittee 32A: High voltage fuses, of IEC technical committee 32: Fuses

This second edition constitutes a technical revision.

The main changes with regard to the previous edition concern the following:

- update of the normative references;
- renewal of the figures.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of the base publication and its amendment will remain unchanged until the stability date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

[IEC 60644:2009](https://standards.iteh.ai/catalog/standards/iec/a43ef5c7-5962-42d2-ab8a-64b5f190d384/iec-60644-2009)

<https://standards.iteh.ai/catalog/standards/iec/a43ef5c7-5962-42d2-ab8a-64b5f190d384/iec-60644-2009>

SPECIFICATION FOR HIGH-VOLTAGE FUSE-LINKS FOR MOTOR CIRCUIT APPLICATIONS

1 Scope

~~This standard applies primarily to fuse-links used with motors started direct-on-line on alternating current systems of 50 Hz and 60 Hz.~~

~~NOTE—When motors are used with assisted starting this specification can also be applied but particular attention should be paid to the selection of the rated current of the fuse-link (see 8.1) and the manufacturer of the fuse-link should preferably be consulted.~~

~~Fuse-links according to this specification are intended to withstand normal service conditions and motor starting pulses. They should comply with the requirements of IEC 60282-1.~~

~~The purpose of this standard is to standardize time-current characteristics, to formulate pulse withstand requirements regarding testing and to give guidance regarding the selection of fuse-links intended to be used with motors.~~

This document applies to fuse-links complying with IEC 60282-1 that are used with motors started direct-on-line on alternating current systems of 50 Hz and 60 Hz.

Fuse-links according to this document are intended to withstand normal service conditions and motor starting pulses.

The purpose of this document is to standardize time-current characteristics and to formulate pulse withstand requirements regarding testing.

This document also applies to fuse-links used with motors that use assisted starting when appropriate care has been taken with selecting the rated current of the fuse-link (using advice from 5.2.3 of IEC TR 62655:2013 and from the fuse manufacturer).

2 Normative references

~~The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.~~

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60282-1:2005/2009, *High-voltage fuses – Part 1: Current-limiting fuses*
IEC 60262-1:2009/AMD1:2014

IEC TR 62655:2013, *Tutorial and application guide for high-voltage fuses*

3 Fuse-link time-current characteristics

Compared to fuses typically used for distribution system protection, fuses for motor circuit protection should have:

- relatively high melting current (slow operation) in the 10 s region of the pre-arcing time-current characteristic to give maximum withstand against motor starting current;
- relatively low melting current (fast operation) in the region below 0,1 s to give maximum short-circuit protection to associated switching devices, cables and motors and their terminal boxes.

Therefore pre-arcing time-current characteristics of fuse-links for motor circuit applications shall be within the following limits:

$$\cancel{I_{f_{10}} / I_n \geq 3 \text{ for } I_n \leq 100}$$

$$\cancel{I_{f_{10}} / I_n \geq 4 \text{ for } I_n > 100}$$

$$\cancel{I_{f_{0,1}} / I_n \leq 20 (I_n / 100)^{0,25} \text{ for all current ratings}}$$

where

~~I_n is the numerical value of the current rating, expressed in amperes, of the fuse-link;~~

$$I_{f_{10}} / I_r \geq 3 \text{ for } I_r \leq 100$$

$$I_{f_{10}} / I_r \geq 4 \text{ for } I_r > 100$$

$$I_{f_{0,1}} / I_r \leq 20 (I_r / 100)^{0,25} \text{ for all current ratings}$$

where

I_r is the numerical value of the rated current, expressed in amperes, of the fuse-link;

$I_{f_{10}}$ and $I_{f_{0,1}}$ are the numerical values of the pre-arcing currents, expressed in amperes, corresponding to 10 s and 0,1 s respectively, as mean values with the tolerances specified in 4.11 of IEC 60282-1.

The term ~~$(I_n / 100)^{0,25}$~~ $(I_r / 100)^{0,25}$ is introduced to take account of the fact that the pre-arcing time-current characteristics for a range of fuse-links diverge as they approach the short-time region.

4 K factor

Factor which defines an overload characteristic to which the fuse-link may be repeatedly subjected under specified motor starting conditions, and other specified motor-operating overloads, without deterioration.

For the purpose of this specification, the value of K is chosen at 10 s. Unless otherwise stated by the fuse-link manufacturer, it is valid from 5 s to 60 s, for a frequency of starts up to six per hour and for not more than two consecutive starts. For conditions different from those specified above, for example where service conditions involve inching, plugging or more frequent starts, the manufacturer should be consulted.

The overload characteristic is obtained by multiplying the current on the pre-arcing characteristic by K (less than unity).

5 Withstand requirements

The performance of a fuse-link for motor circuit applications is in general determined by the following criteria:

- to withstand without deterioration starting pulses in rapid succession due for example to abnormal conditions, such as those occurring during commissioning of the equipment;
- to withstand without deterioration a large number of motor starts in normal service conditions.

This standard therefore specifies two sequences of tests representative of these conditions: 100 cycles corresponding to abnormal service conditions; 2 000 cycles corresponding to normal service conditions. It is expected that a fuse-link which passes these tests will have a good behaviour during a satisfactory life duration.

6 Withstand tests

6.1 General

The withstand tests are type tests. Both test sequences shall be carried out on the same fuse-link.

The fuse-link shall be tested under the same test conditions as in 6.5.1.2 of IEC 60282-1.

The values of test currents shall be $K I_{f10}$ for pulses simulating the motor starting pulses and $K I_{f10}/6$ for periods simulating the normal motor running, I_{f10} being the pre-arcing current at 10 s. The tolerance on both values shall be $^{+10}_0$ %.

The duration of individual pulses shall be 10 s. The tolerance on the 10 s periods, both pulses and off periods, shall be $\pm 0,5$ s.

Tests shall be made at any convenient voltage and at a frequency from 48 Hz to 62 Hz.

6.2 Test sequence No. 1

This test sequence shall comprise 100 cycles of 1 h as follows:



- a current $K I_{f10}$ for 10 s;
- an off period of 10 s;
- a current $K I_{f10}$ for 10 s;
- a current $K I_{f10}/6$ for 3 560 s;
- an off period of 10 s.

6.3 Test sequence No. 2

This test sequence shall comprise 2 000 cycles of 10 min as follows:

- a current $K I_{f10}$ for 10 s;
- a current $K I_{f10}/6$ for 290 s;
- an off period of 300 s.

Test sequences No.1 and No.2 are illustrated in Figure 1.

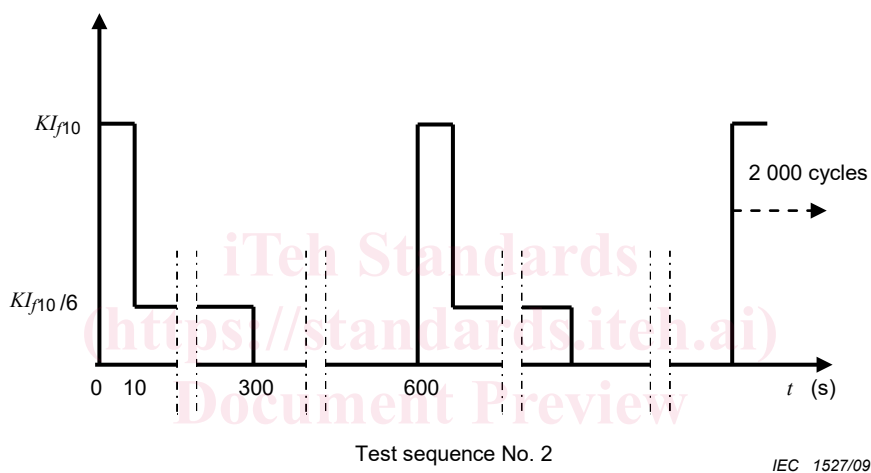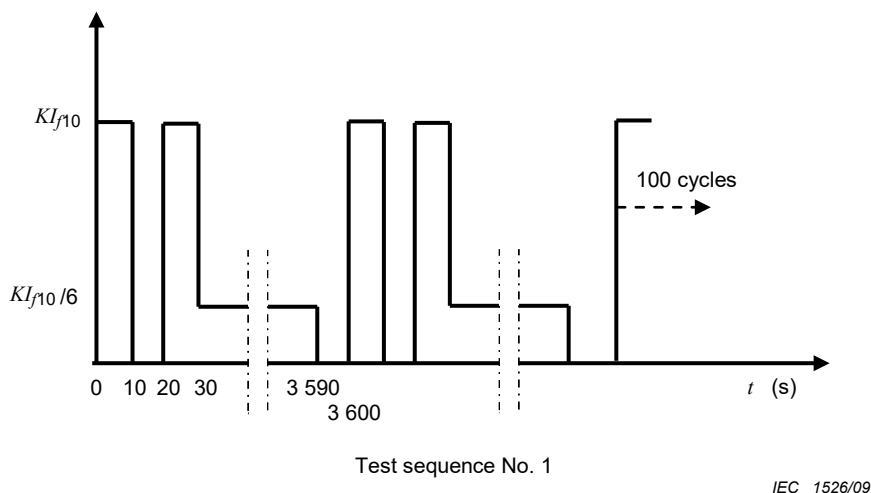

<https://standards.iteh.ai/catalog/standards/iec/60644-2009> **Figure 1 – Diagrams of the test sequences** [5f190d384/iec-60644-2009](https://standards.iteh.ai/catalog/standards/iec/60644-2009)

6.4 Interpretation of the test results

After each test sequence is completed, the fuse-link shall be allowed to cool. After cooling, there shall have been no significant change in its characteristics. A check need not be made until after completion of both test sequences. Measurements to show that there is no significant difference in the values of resistance of the fuse-links before and after test give an indication of conformity with this requirement. In case of doubt, a further method is to subject the fuse-link after cooling after test to the current $K I_{f10}$ sustained for a sufficient time to cause the fuse-element to melt. The pre-arcing time shall lie within the tolerances of the pre-arcing time-current characteristic given by the manufacturer.

If fuse-links form part of a homogeneous series as defined in items d), e) and f) of 6.6.4.1 of IEC 60282-1, the maximum and minimum current ratings only need be tested.

If the same value of K is assigned to both maximum and minimum current ratings, then that value may also be deemed to apply to all intermediate current ratings within the homogeneous series. If different values of K are assigned to the maximum and minimum current ratings, then the K factors for intermediate ratings may be determined by linear interpolation; see Figure 2.

If a manufacturer assigns a higher value of K for an intermediate rating than that resulting from interpolation, this assigned value shall be proved by tests to the requirements of Clause 6.

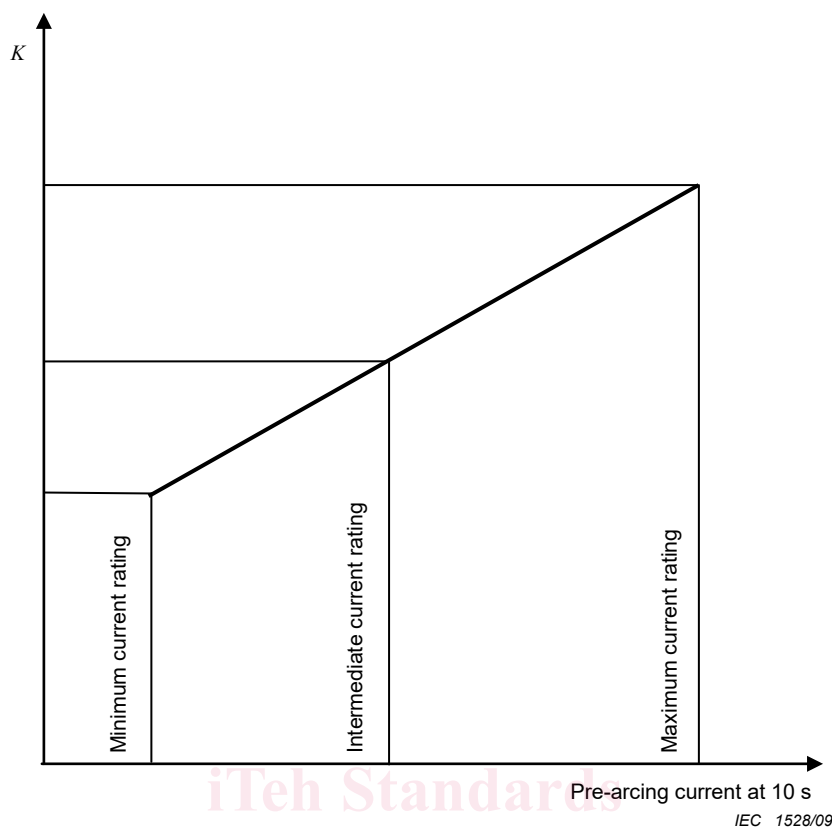


Figure 2 – Determination of K factor for fuse-links of intermediate rating of a homogeneous series

7 Information to be given to the user

Although in principle any high-voltage fuse-link can be used to protect motor circuits, there are advantages in selecting a fuse-link specifically designed for this application.

For fuse-links intended to be used for motor circuit protection, the manufacturer shall state the K factor which will indicate to the user the degree to which the fuse-link is capable of withstanding cyclic overloads without deterioration. It shall be stated if the K factor is related to the minimum or the mean pre-arcing time-current characteristic.

The pre-arcing time-current characteristic of the fuse-link with current values multiplied by factor K thus defines the boundary of the overload curve for a given number of motor starts per hour.

8 Selection of fuse-links for motor circuit applications and correlation of fuse-link characteristics with those of other components of the circuit

8.1 Selection of fuse-links

~~The fuse-link is inserted into the motor circuit that the fuse-link is intended to protect. Some ratings of the fuse-links (e.g. rated voltage and rated breaking current) are therefore dependent on the system and others (e.g. rated current) are dependent on the motor.~~

~~The ability to withstand repetitive starting conditions is an important factor. When selecting a fuse-link for a given motor circuit application, due regard should be paid to the K factor, which should be applied to the pre-arcing time-current characteristic of the fuse-link to take account of these starting conditions.~~

~~The usual concept of rated current, based upon the ability of a fuse-link to carry a given current continuously without exceeding a specified temperature rise, is usually of secondary importance where the motor is started direct on-line. The fuse-link for such applications is normally chosen by reference to the paragraphs above.~~

~~However, when the fuse-links are enclosed in motor circuit equipment, it should be verified that their rated current exceeds the running current of the motor by an amount sufficient to take account of the effects of the temperature of the air surrounding them (see Annex F of IEC 60282-1).~~

~~Where assisted starting is used and thereby starting currents are reduced, the above method of selection is generally applicable, but allowance may have to be made for the high transient currents which, with some methods of starting, flow during transition from one connection to the succeeding connection. Further, since assisted starting in general allows the use of fuse-links of lower current rating, the temperature rise under running conditions is likely to be of primary importance.~~

8.2 — Co-ordination with other circuit components

~~Figure 3 illustrates a typical motor circuit application involving a motor, relay or relays (providing one or more of the following: inverse overcurrent protection, instantaneous overcurrent protection, instantaneous earth fault protection), contactor or other mechanical switching device, the cable and the fuse-link itself.~~

~~The motor will be chosen for its particular duty, thus fixing the values of the full load current and the starting current. The duration and frequency of the starts will also be fixed. The characteristic of the associated inverse time overcurrent relay will then be chosen to give adequate thermal protection to the motor. The switching device is selected in conjunction with fuse-link to co-ordinate with the already selected motor.~~

~~In particular, referring to Figure 3:~~

- ~~a) the pre-arcing time-current characteristic of the fuse-link, when multiplied by the appropriate K factor, should lie to the right of the motor starting current at point A;~~
- ~~b) the switching device should be capable of withstanding the conditions defined by the operating characteristic curves shown in Figure 3 and defined by the points D, B, C and E;~~
- ~~c) the rated current of the fuse-link should be chosen such that when the fuse-link is mounted in its service position it is capable of carrying continuously the running current of the motor without overheating. This is of particular importance where assisted starting is used;~~
- ~~d) the current corresponding to the point of intersection B of the curves of the fuse-link and the overcurrent relay should be less than the rated maximum breaking current of the switching device;~~
- ~~e) the rated minimum breaking current of the fuse-link should not exceed the minimum take-over current (where the switching device takes over breaking duty from the fuse, point B);~~
- ~~f) in the event of instantaneous protection being provided, the take-over point will move from B to C. Due regard should be paid to the possibility that the switching device might open at a current greater than its rated maximum breaking current;~~
- ~~g) the cut-off current of the fuse-link at the maximum fault current of the system should not exceed the rated peak short-circuit withstand current (I_p) of the switching device;~~
- ~~h) it is desirable that the rated minimum breaking current of the fuse-link should be as low as possible and preferably should be at least as low as the starting current of the motor (see also 9.3.3.5 of IEC 60282-1);~~
- ~~i) as shown in Figure 3, the whole of the withstand curve of the cable should lie to the right of the operating characteristic DBCE. Where high ratings of fuse-link are necessary due to the nature of the motor starting duty (for example, long starting times and frequent starts),~~