

TECHNICAL REPORT

Guidelines for the measurement of high-power damage sensitivity of single-mode fibres to bends – Guidance for the interpretation of results

(<https://standards.iteh.ai>)

Document Preview

IEC/TR 62547:2009

<https://standards.iteh.ai/catalog/standards/iec/375c029-148f-475c-8de3-cd53a4ff7527/iec-tr-62547-2009>

WITHDRAWN



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2009 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.

Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland
Email: inmail@iec.ch
Web: www.iec.ch

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: www.iec.ch/online_news/justpub

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: www.iec.ch/webstore/custserv

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch

Tel.: +41 22 919 02 11

Fax: +41 22 919 03 00



<https://standards.iteh.ai/document/iec/375c029-148f-475c-8de3-cd53a4ff7527/iec-tr-62547-2009>

TECHNICAL REPORT

Guidelines for the measurement of high-power damage sensitivity of single-mode fibres to bends – Guidance for the interpretation of results

[\(https://standards.iteh.ai/\)](https://standards.iteh.ai/)
Document Preview

IEC/TR 62547:2009

<https://standards.iteh.ai/en/standards/iec/375c029-148f-475c-8de3-cd53a4ff7527/iec-tr-62547-2009>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

PRICE CODE

W

ICS 33.180.10

ISBN 978-2-88910-762-9

CONTENTS

FOREWORD.....	4
1 Scope.....	6
2 Normative references	6
3 Background.....	7
4 Test procedures	8
4.1 Safety	8
4.1.1 Safety issues.....	8
4.1.2 Eye safe working	9
4.1.3 Risk of fire / flame	9
4.1.4 Risk of atmospheric pollution from coating by-products.....	9
4.1.5 Risk of fibre fuse initiation	9
4.1.6 Risk of damage to downstream components.....	9
4.1.7 Risk avoidance	9
4.2 General.....	10
4.3 Apparatus.....	10
4.3.1 Light source.....	10
4.3.2 Isolator	10
4.3.3 Bend jig.....	11
4.3.4 Receiver.....	11
4.3.5 Attenuator	11
4.3.6 Computer.....	11
4.3.7 Camera.....	11
4.3.8 Thermal imaging camera.....	11
4.3.9 Oven.....	11
4.3.10 Sample.....	11
4.4 Test Method 1. Failure time characterization as a function of the launch power and bend conditions (bend angle and diameter).....	12
4.4.1 Description and procedure.....	12
4.4.2 General comments and conclusions on test Method 1.....	13
4.4.3 Reported items for test Method 1.....	14
4.5 Test Method 2 – Equilibrium temperature measurement	14
4.5.1 General	14
4.5.2 Coating heating measurements and power lost at bend	15
4.5.3 Analysis – Test Method 2: Equilibrium temperature	16
4.5.4 Test conditions for test Method 2.....	18
4.5.5 Conclusions on test Method 2.....	18
4.5.6 Reported items for test Method 2.....	19
5 Conclusions.....	19
Annex A (informative) Robustness of fibres against damage from exposure to high-power at bends	21
Bibliography.....	39
Figure 1 – An example of experimental layout.....	10
Figure 2 – Damage results for fibre type ‘G’	12

Figure 3 – Example of time evolution of loss power and maximum temperature reached by the coating at the apex when high-power is launched ($P = 3,2W$, Bend diameter = 5 mm, $\lambda = 1360$ nm Reference [10])	14
Figure 4 – Sample FLIR camera output of the fibre bent under high-power. The cross-mark indicates the location of the maximum temperature	15
Figure 5 – Evolution of the coating equilibrium temperature as a function of launched power (see reference [10])	16
Figure A.1 – Clamping arrangements for high-power damage testing in 180° bends.....	23
Figure A.2 – Clamping arrangement for high-power damage testing in 90° bends	23
Figure A.3 – Typical R1 failure characteristics with a loss of greater than 10 dB	24
Figure A.4 – Typical R2 failure characteristics	24
Figure A.5 – A schematic illustration of the 3 regimes in the first fibres tested	24
Figure A.6 – Monitor signal changes – typical for a R1 failure	25
Figure A.7 – Monitor signal changes – typical for a R2 failure	25
Figure A.8 – Damage results for fibre type ‘D’	26
Figure A.9 – High-power damage results at 90° and 180° for fibre ‘D’	26
Figure A.10 – Time to failure versus bend diameter at different launched powers.	27
Figure A.11 – Bend loss performance at 180° (and 90° for reference) for fibre ‘D’ (see Clause A.7 for a full discussion).....	28
Figure A.12 – Power limitation for primary coated fibre	28
Figure A.13 – Comparison of power limitation for primary and secondary coated fibre D.....	29
Figure A.14 – Maximum optical power ensuring a 25 year lifetime and 180° bend loss versus bend diameter (from reference [10])	30
Figure A.15 – Maximum optical power ensuring a 25 year lifetime versus 180° bend loss	30
Figure A.16 – 180° 2-point OSA Bend Loss for fibre ‘D’	32
Figure A.17 – 180° 2-point bend loss at 1 480 nm for fibre ‘D’	32
Figure A.18 – 2-point bend loss for fibre ‘D’ at various angles.....	33
Figure A.19 – 180° 2-point bend loss at 1 480 nm for a range of fibres	34
Figure A.20 – Time to failure versus inverse of equilibrium temperature for bend diameters varying from 4 mm to 10mm and launched power in the range 0,8 W-3,2 W	35
Figure A.21 – The effect of baking primary coated fibre ‘C’ (reference [14]) in an oven at constant temperature	36
Figure A.22 – Time to failure for different coatings as a function of bend radius (upward arrow indicates a test which was survived by the fibre).....	38
Table A.1 – Time to failure vs coating refractive index	37

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**GUIDELINES FOR THE MEASUREMENT OF HIGH-POWER
DAMAGE SENSITIVITY OF SINGLE-MODE FIBRES TO BENDS –
GUIDANCE FOR THE INTERPRETATION OF RESULTS**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

The main task of IEC technical committees is to prepare International Standards. However, a technical committee may propose the publication of a technical report when it has collected data of a different kind from that which is normally published as an International Standard, for example "state of the art".

IEC/TR 62547, which is a technical report, has been prepared by subcommittee 86A: Fibres and cables, of IEC technical committee 86: Fibre optics.

The text of this technical report is based on the following documents:

Enquiry draft	Report on voting
86A/1224/DTR	86A/1235/RVC

Full information on the voting for the approval of this technical report can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

Withdawn

iTech Standards
(<https://standards.itih.ai>)
Document Preview

<https://standards.itih.ai/iec/iec-tr-62547-2009>

GUIDELINES FOR THE MEASUREMENT OF HIGH-POWER DAMAGE SENSITIVITY OF SINGLE-MODE FIBRES TO BENDS – GUIDANCE FOR THE INTERPRETATION OF RESULTS

1 Scope

This technical report describes two methods for the measurement of the sensitivity of single-mode optical fibres to high-power damage at bends.

- Method 1 – Failure time characterization as a function of the launch power and bend conditions (bend angle and bend diameter).
- Method 2 – Equilibrium temperature measurement.

Results from the two methods can only be compared qualitatively.

The results, in this technical report, are predominantly on uncabled and unbuffered fibres. Cabled and buffered fibres are expected to respond differently – because the outer layers can affect the ageing process. Note also that Method 2 testing cannot be applied to buffered or cabled fibres.

These methods do not constitute a routine test to be used in the evaluation of optical fibre.

The parameters derived from the two methods are not intended to be specified within a detailed fibre specification.

Note that the catastrophic failure modes arising and which are described in this technical report in general occur at bending radii much smaller than specified in the single-mode fibres specification, IEC 60793-2-50, or than would be recommended based on mechanical reliability considerations alone.

The technical report includes Annex A which gives a discussion on the rationale for the approaches adopted, metrics for assessment, guidance, examples and some conclusions from initial studies.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60793-1-47, *Optical fibres – Part 1-47: Measurement methods and test procedures – Macrobending loss*

IEC 60793-2-50, *Optical fibres – Part 2-50: Product specifications – Sectional specification for class B single-mode fibres*

IEC 60825-1, *Safety of laser products – Part 1: Equipment classification and requirements*

IEC 60825-2, *Safety of laser products – Part 2: Safety of optical fibre communication systems (OFCS)*

IEC/TR 61292-4: *Optical amplifiers – Part 4: Maximum permissible optical power for the damage-free and safe use of optical amplifiers, including Raman amplifiers*

IEC 61300-2-14, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2-14: Tests – Optical power handling and damage threshold characterization*

3 Background

Optical network operators are considering the use of high-power lasers, for example fibre Raman amplifiers in the central office with typical launch powers in the region of 500 mW to ~ 2 W. For standard installation practices where optical fibre minimum bend diameters are limited to 60 mm these powers have not constituted a problem. However, there is good evidence that bends tighter than the recommended 50 mm minimum bend diameter mistakenly occur in practice. It is believed that these generally arise after installation from maintenance practices which are difficult to mitigate against as the technicians servicing such networks often work independently and can come from different organisations. Tight bends arising at system installation stage should generally be identified and eliminated following provisioning - by OTDR testing or from link loss measurements. Experimental evidence shows that high-power damage can occur relatively quickly at bends less than 15 mm diameter. Damage occurs when the coating temperature increases at bends as the coating absorbs the light lost at the bend. Damage can take the form of coating ageing, pyrolysis and burning and if the temperature increases above 700 °C catastrophic softening of the glass. Burning of the coating can result in a fire. Background references are available in the Bibliography and in IEC/TR 61292-4.

The rationale for studying the resilience of optical fibre and coatings to high-power damage at bends is described in Clause A.1. Telecommunications operators can adopt a range of options to avoid the risk of damage, see Clause A.2. There is now a broad agreement from a number of laboratories on the catastrophic failure modes of the optical fibre and on the thresholds for damage at high-powers in bent optical fibres. Observations include:

- Research has clearly shown that high optical power at tight fibre bends can cause catastrophic damage within a few days. Tests on a range of different fibres including both B1 and B4 primary coated fibre types have shown that catastrophic damage can conveniently be grouped into two regimes:
 - Regime 1: Catastrophic failure of the glass (R1).
 - Regime 2: Catastrophic failure to the fibre coating (R2).
 - A third regime, R3, has been identified in which catastrophic damage does not occur. Here the temperature does not reach a sufficient level to cause short-term catastrophic damage but over the longer term coating ageing and a change in some of the physical properties of the coating may result.

Further description of the observed regimes of damage is included in Clause A.5.

- R1 and R2 failures have been observed in both primary and secondary coated fibres. Some fibre and coating types are more resilient than others, see references [1]¹, [2], [3], [4], [5], [6], [7], [8], [9], [10], [11].
- Coating ageing can take a considerable time (e.g. reference [2]). However, it is an indicator of potential R1 or R2 damage. Refer to Clause A.5
- Arguably at present, the greatest risk of damage to single-mode fibre systems is due to the use of high-power Raman pumps at 1 480 nm hence much of the testing has been carried out at this wavelength. Whilst there are general indications that the absorption spectra of cured coating materials are generally flat in the 1 450 nm to 1 625 nm range, in specific coating formulations absorption features could make a coating especially sensitive at a particular wavelength. Also, bend loss in B1 and B4 fibres generally increases with wavelength, so damage resistance may be lowered at longer wavelengths. More testing is

¹ Figures in square brackets refer to the Bibliography.

needed to examine fibre bend loss characteristics and the absorption spectra of cured coating materials to ensure that wavelength dependent effects are accounted for.

- For laboratory testing and high-power system operation there are important safety issues to be considered including a risk of flame and fire. These issues are addressed in 4.1
- This subject is in development and the following are areas for further work.
 - As discussed above, much of the testing so far has been carried out at or near to 1 480 nm and the effect of a significant change to the test wavelength is not known. Experimental results for damage testing at wavelengths near 1 550 nm and 1 625 nm would be useful.
 - Coating absorption. Some studies have examined the effects of changing coating composition and the ambient environment – see references [12] and [13].
 - The testing of fibres with different coloured primary coatings.
 - The effect of fibre production variability and for example, testing the effect of fibres with different MAC (MFD [μm] / cutoff wavelength [μm]) numbers but with the same profile type. Similarly testing of fibres with small differences in coating uniformity, composition or degree of coating cure needs to be considered.
 - Testing diverse bend geometries; the impact of bend loss variations.
 - The impact of ambient temperature.
- For the most sensitive fibre tested so far the threshold for damage (R2) for a bend loss of 4 dB bend is ~ 200 mW, see reference [14].
- The use of different fibre secondary coatings (buffer layers to an outer diameter (OD) of ~ 800 μm) can lower or raise damage thresholds – See reference [14].

NOTE Catastrophic failure occurs when the bend loss and consequent coating absorption drives the fibre temperature far above the maximum temperature for environmental tests of conventional UV curable acrylate coatings, as specified in IEC 60793-2-50.

The purpose of this document is to define measurement techniques to characterise the robustness of optical fibre to damage of this type. However, if new fibres are developed to minimize the possibilities of high-power damage at bends other transmission and compatibility issues must be considered – see Clause A.3.

Note also that study group 6 in ITU-T (ITU-T SG6) is currently working on the optical fibre cable maintenance and support issues associated with high-power optical systems 15.

Throughout this report, illustrative data is presented for particular B1 and B4 fibre types identified by letter from A to G from studies documented in references [2], [3], [7] and [14].

4 Test procedures

4.1 Safety

4.1.1 Safety issues

There are a number of important issues both for testing and for operational systems use.

- Eye safe working
- Risk of fire / flame
- Risk of atmospheric pollution from coating by-products
- Risk of fibre fuse initiation
- Risk of damage to downstream components.

Some discussion on these issues is covered. However, an individual assessment of risk should be carried out prior to commencing a programme of tests depending on previous experience with high-power lasers, the local working practices and the test laboratory configuration. Also, it is recommended for first tests that an operator monitors the experiment continually so that the failure conditions with specific fibre and / or coating types can be correctly determined. The use of a video camera to monitor the fibre bend at high-power can provide a safer working environment.

4.1.2 Eye safe working

All necessary safety procedures shall be taken in accordance with IEC 60825-1, Clause 2 and IEC 60825-2. These test procedures involve the use of optical powers that can constitute potential ocular and skin hazards for test personnel.

At 1 480 nm, the risk of retinal damage is much reduced compared with shorter wavelengths, as incoming radiation will mainly be absorbed in the cornea, see reference [16]. Nevertheless, care needs to be taken to ensure that accidental exposure cannot occur and that high-powers are only switched on once the fibre (and test condition) has been set up. Also, the use of optical instruments for viewing can be more hazardous than not.

Laser light blocks should also be used to trap and mask radiation leaking from the test bend.

4.1.3 Risk of fire / flame

Warning note. In the case of samples that can sustain a flame care must be taken to ensure that sample holders are non-flammable and robust clamps are used to hold the fibres in position during testing.

4.1.4 Risk of atmospheric pollution from coating by-products

At high-powers and elevated coating temperatures, volatile components in the fibre coating will be driven off. As this occurs and with time, the coating volume reduces, oxidation occurs and the coating discolours. The aged or damaged coating volumes involved are small as the damage region at a fibre bend is generally extremely localised. To reduce the risk of local atmospheric pollution, it is recommended that the fibre bend test zone is hooded and an extract fan is run continuously to capture particulate and purge potentially hazardous air borne, coating by-products.

4.1.5 Risk of fibre fuse initiation

At high optical powers and with appropriate triggering it is possible to initiate the 'fibre fuse effect' [17]. Note that generally launch powers of ~ 2 W - 3 W are required to trigger this effect and the laser supply can be protected from such a risk by incorporating an optical isolator or a fibre taper just after the laser source.

4.1.6 Risk of damage to downstream components

With some fibre samples and with the high-power being lost from the fibre at a bend, there may be a risk to downstream components; for example where test fibre is jointed to a different fibre type or at a further bend. To mitigate this risk, all components used shall be rated at the power to which they could be exposed.

4.1.7 Risk avoidance

A number of steps can be taken to reduce identified risks;

- Access to the test laboratory can be restricted to authorised users.
- Warning lights external to the laboratory can alert visitors of the high-power laser hazard. Laser safety spectacles can be made available for lab users and visitors.

- A video camera can be used to monitor the test bend and reduce the need to view the test fibre directly. This reduces the risk of exposure to high-power radiation.
- The laser control system could incorporate optical monitoring for the duration of the experiment. This can allow the driving PC to auto-shutdown the laser when a failure event is identified.
- Fibres can be carefully clamped and / or taped in position in robust clamps for the duration of the tests.
- Fire extinguishing equipment should be on-hand.

4.2 General

A suitable experimental arrangement for high-power damage testing is illustrated in Figure 1. The apparatus description applies to both test methods. However, in Method 1 the infra-red (IR) camera is not necessary and can be replaced by a normal colour camera - useful for experimental monitoring purposes. The test condition suggested is:

- Two-point bend geometry (where the fibre is fixed at two points and allowed to form a bend in free space)
- 180° configuration.

Other test conditions are discussed in Clause A.4.


4.3 Apparatus

4.3.1 Light source

A suitable high-power source at 1 480 nm is proposed for the nominal test wavelength (although the performance at other, typically longer, wavelengths needs to be considered as discussed in Clause 3). Launch powers of from 100 mW to 1 500 mW or even to 5 W (see reference [14]) need to be considered

4.3.2 Isolator

An optical isolator or fibre taper that can act as a 'fuse', protecting the laser.

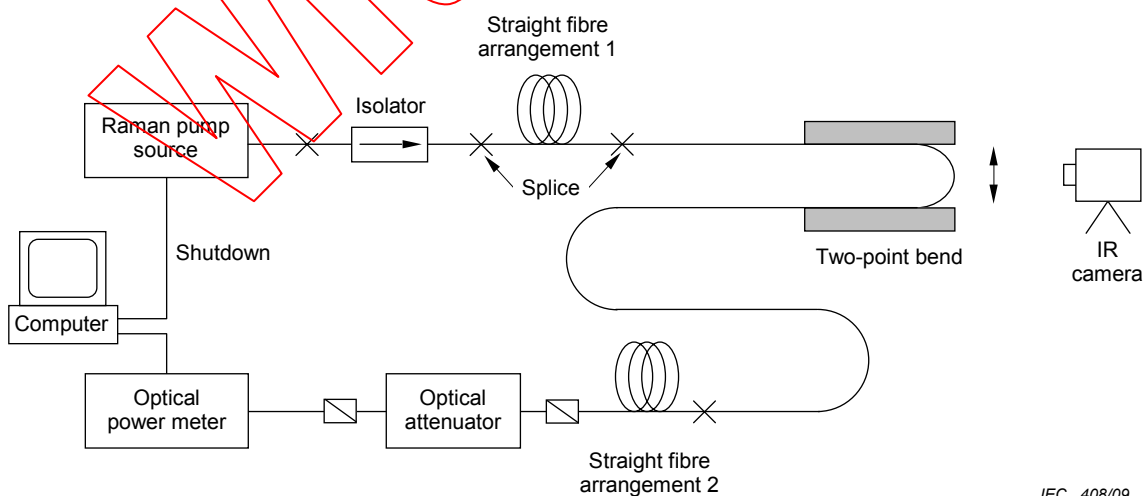

IEC 408/09

Figure 1 – An example of experimental layout