

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Optical fibres –
Part 1-47: Measurement methods and test procedures – Macrobending loss**

**Fibres optiques –
Partie 1-47: Méthodes de mesure et procédures d'essai – Pertes par
macrocourbures**



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2009 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in 15 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

More than 60 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Catalogue IEC - webstore.iec.ch/catalogue

Application autonome pour consulter tous les renseignements bibliographiques sur les Normes internationales, Spécifications techniques, Rapports techniques et autres documents de l'IEC. Disponible pour PC, Mac OS, tablettes Android et iPad.

Recherche de publications IEC - www.iec.ch/searchpub

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études,...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire en ligne de termes électroniques et électriques. Il contient plus de 30 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans 15 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

Glossaire IEC - std.iec.ch/glossary

Plus de 60 000 entrées terminologiques électrotechniques, en anglais et en français, extraites des articles Termes et Définitions des publications IEC parues depuis 2002. Plus certaines entrées antérieures extraites des publications des CE 37, 77, 86 et CISPR de l'IEC.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: csc@iec.ch.

INTERNATIONAL STANDARD

NORME INTERNATIONALE

Optical fibres –
Part 1-47: Measurement methods and test procedures – Macrobending loss

Fibres optiques –
**Partie 1-47: Méthodes de mesure et procédures d'essai – Pertes par
macrocourbures**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 33.180.10

ISBN 978-2-8322-3073-2

Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.

CONTENTS

FOREWORD.....	3
INTRODUCTION.....	5
1 Scope.....	6
2 Normative references	6
3 Specimen	7
3.1 Specimen length.....	7
3.1.1 Method A – Fibre winding	7
3.1.2 Method B – Quarter circle bends	7
3.2 Specimen end face.....	7
4 Apparatus.....	7
4.1 Method A – Fibre winding	7
4.2 Method B – Quarter circle bends	7
5 Procedure	8
5.1 Method A – Fibre winding	8
5.1.1 General	8
5.1.2 Single-mode fibres	9
5.1.3 Multimode (A1) fibres	10
5.2 Method B – Quarter circle bends	10
6 Calculations	12
7 Results.....	12
7.1 Information available with each measurement	12
7.2 Information available upon request.....	12
8 Specification information	13
Annex A (informative) Small bend radius phenomena	14
Bibliography.....	16
Figure 1 – Quarter circle guide groove in plate.....	8
Figure 2 – Multiple bends using stacked plates	11
Figure A.1 – Loss curves versus curve fits	14

INTERNATIONAL ELECTROTECHNICAL COMMISSION

OPTICAL FIBRES –

**Part 1-47: Measurement methods and test procedures –
Macrobending loss**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60793-1-47 has been prepared by subcommittee 86A: Fibres and cables, of IEC technical committee 86: Fibre optics.

This third edition cancels and replaces the second edition published in 2006. It constitutes a technical revision. The main change is listed below:

- Introduction of the Annex A describing small bend radius phenomena.

This standard is to be read in conjunction with IEC 60793-1-1.

This bilingual version (2015-12) corresponds to the monolingual English version, published in 2009-03.

The text of this standard is based on the following documents:

CDV	Report on voting
86A/1207/CDV	86A/1240/RVC

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

The French version of this standard has not been voted upon.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of IEC 60793 series, published under the general title *Optical fibres*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IEC 60793-1-47:2009

<https://standards.iec.ch/catalogue/standards/sstd/4eb4af6-2728-4a32-a134-698a30fc0665/iec-60793-1-47-2009>

INTRODUCTION

Publications in the IEC 60793-1 series concern measurement methods and test procedures as they apply to optical fibres.

Within the same series, several different areas are grouped, but all numbers are possibly not used, as follows:

- Parts 1-10 to 1-19: General
- Parts 1-20 to 1-29: Measurement methods and test procedures for dimensions
- Parts 1-30 to 1-39: Measurement methods and test procedures for mechanical characteristics
- Parts 1-40 to 1-49: Measurement methods and test procedures for transmission and optical characteristics
- Parts 1-50 to 1-59: Measurement methods and test procedures for environmental characteristics

iTeh STANDARD PREVIEW
(standards.iteh.ai)

IEC 60793-1-47:2009

<https://standards.iteh.ai/catalog/standards/sist/4eb4af6-2728-4a32-a134-698a30fc0665/iec-60793-1-47-2009>

OPTICAL FIBRES –

Part 1-47: Measurement methods and test procedures – Macrobending loss

1 Scope

This part of IEC 60793 establishes uniform requirements for measuring the macrobending loss of single-mode fibres (category B) at 1 550 nm or 1 625 nm, category A1 multimode fibres at 850 nm or 1 300 nm, and category A3 and A4 multimode fibres at 650 nm, 850 nm or 1 300 nm, thereby assisting in the inspection of fibres and cables for commercial purposes.

The standard gives two methods for measuring macrobending sensitivity:

- Method A – Fibre winding, pertains to category B single-mode fibres and category A1 multimode fibres.
- Method B – Quarter circle bends, pertains to category A3 and A4 multimode fibres.

For both of these methods, the optical power is measured using either the power monitoring or the cut-back technique.

Methods A and B are expected to produce different results if they are applied to the same fibre. This is because the key difference between the two methods is the deployment, including the bend radius and amount of fibre that is bent. The reason for the difference is that A3 and A4 multimode fibres are expected to be deployed in short lengths with relatively fewer bends compared to single-mode and category A1 multimode fibres.

<https://standards.iech.org/standards/servlet?docId=4af6-2728-4a32-a134-698a30fc0665/iec->

In the following text, the “curvature radius” is defined as the radius of the suitable circular shaped support (e.g. mandrel or guiding groove on a flat surface) on which the fibre can be bent.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60793-1-1: *Optical fibres – Part 1-1: Measurement methods and test procedures – General and guidance*

IEC 60793-1-40: *Optical fibres – Part 1-40: Measurement methods and test procedures – Attenuation*

IEC 60793-1-46: *Optical fibres – Part 1-46: Measurement methods and test procedures – Monitoring of changes in optical transmittance*

IEC 61280-4-1: *Fibre-optic communication subsystem test procedures – Part 4-1: Cable plant and links – Multimode fibre-optic cable plant attenuation measurement*

3 Specimen

3.1 Specimen length

3.1.1 Method A – Fibre winding

The specimen shall be a known length of fibre, as specified in the detail specification. In particular, the length of the sample tested for loss is determined by the measurement set-up, i.e. curvature radius (R) and number of turns (N); any further fibre length does not affect the measurement results, provided that the signal to noise (S/N) ratio is optimised.

3.1.2 Method B – Quarter circle bends

The specimen length shall be determined according to the details shown in 5.2.

3.2 Specimen end face

Prepare a flat end face, orthogonal to the fibre axis, at the input and output ends of each test specimen.

4 Apparatus

4.1 Method A – Fibre winding

The apparatus consists of a tool (e.g. a mandrel or a guiding groove on a flat surface) able to hold the sample bent with a radius as stated in the specification (e.g. 30 mm for single-mode fibres and 37,5 mm for multimode fibres) and a loss-measurement instrument. Determine the macrobending loss at the wavelength as stated in the specification (e.g. 850 nm or 1 300 nm for multimode fibres, 1 550 nm or 1 625 nm for singlemode fibre) by using either the transmitted power monitoring technique (method A of IEC 60793-1-46) or the cut-back technique (method A of IEC 60793-1-40), taking care of the appropriate launch condition for the specific fibre type.

4.2 Method B – Quarter circle bends

The apparatus consists of one or more plates, each containing one or more “guide grooves,” and a loss-measurement instrument. The plates shall be designed to be stacked during the test without contacting the sample fibre in a lower or higher plate; such contact will affect the measurement results. Each guide groove shall have a quarter circle segment (i.e. 90°) as shown in Figure 1. The bend radius r , i.e. the radius of the quarter circle segment, shall be stated in the detail specification. The width of each guide groove shall be at least 0,4 mm greater than the diameter of the fibre.

Determine the macrobending loss at the wavelength as stated in the specification (e.g. 650 nm, 850 nm, or 1 300 nm) by using either the transmitted power monitoring technique (method A of IEC 60793-1-46) or the cut-back technique (method A of IEC 60793-1-40), taking care of the appropriate launch condition for the specific fibre type.

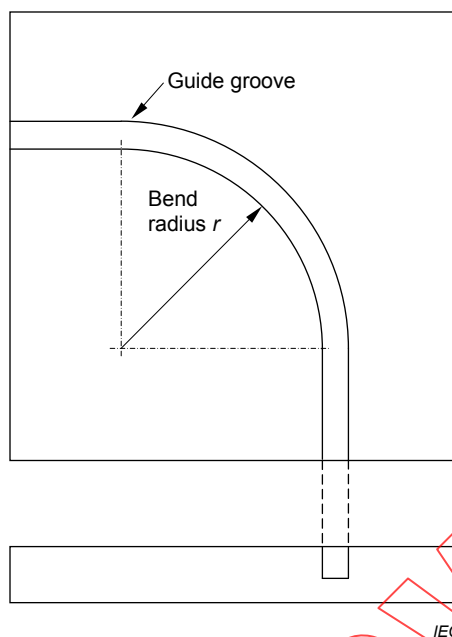


Figure 1 – Quarter circle guide groove in plate

5 Procedure

5.1 Method A – Fibre winding

5.1.1 General

Loosely wind the fibre on the tool, avoiding excessive fibre twist. The number of turns, curvature radius and wavelength at which loss is to be measured are discussed in the following paragraphs.

Since the actual curvature radius is critical, a maximum tolerance of $\pm 0,1$ mm (for radii lower than or equal to 15 mm) or $\pm 0,5$ mm to 1,0 mm (for larger radii) is accepted: a tighter tolerance on small radii is required for higher measurement sensitivity.

Both for single-mode and for multimode fibres, two optical powers can be measured using:

- the power-monitoring technique, which measures the fibre attenuation increase due to a change from the straight condition to a bent condition, or
- the cut-back technique, which measures the total attenuation of the fibre in the bent condition. In order to determine the induced attenuation due to macrobending, this value should be corrected for the intrinsic attenuation of the fibre.

The fibre length outside the mandrel and the reference cut-back length shall be free of bends that might introduce a significant change in the measurement result. Collection of excess fibre in a bend radius of at least 140 mm is recommended.

It is also possible to rewind the fibre from a mandrel with a large radius (introducing negligible macrobend loss) to the mandrel with the required radius. In this case, the macrobend loss can be determined directly by using the power-monitoring technique (without the correction for the intrinsic attenuation of the fibre).

Care must be taken in order not to introduce torsion on any fibre part during the measurements, as this would affect the result.

5.1.2 Single-mode fibres

Different applications may require different deployment conditions: fibre types have been developed which exhibit bending performances optimized for each condition.

Two typical environments are recognized for (possibly) different fibre types, for which different measurement set-ups should be considered when characterizing fibre performances.

- a) Long distance networks: far from urban areas, space occupancy is not typically an issue, and bends imposed to the fibres can be limited to relatively large radii. Fibres designed for this application should be tested in similar conditions, i.e. with the samples wrapped around relatively large radius mandrels, e.g. in the range 25 mm to 30 mm.

This measurement set-up is mainly affected by errors related to low *S/N* ratio and by unwanted tension, torsions or kinks on the relatively long fibre length used for the measurement.

- b) Access networks: operating conditions require bending radii as small as possible, compatible with lifetime expectations and acceptable losses. Fibres designed for this application should be tested in similar conditions, i.e. with the samples bent at small radii, e.g. in the range 7,5 mm to 15 mm (see Annex A).

The measurement can be affected by different sources, one of which is reflections. The reflection of light at the coating/air or coating/glass, at surrounding surfaces (including, when used, the mandrel surface), or at connectors are some examples.

The test can be carried out on samples either making complete (360 °) turn(s), in open air or around a suitable support (mandrel), or making an equivalent number of partial turns, for example u-turns (180 °) or quarter turns (90 °), in open air or around suitable supports. The length under test is different for complete and partial turns, for example the length of a complete turn being twice the length of a u-turn or four times the length of a quarter turn. In the following, the term "coil" refers to one complete turn. One coil could also be made of, for example two consecutive u-turns¹ or four consecutive quarter turns. This should be taken into account while normalizing the results to the length of the sample (number of coils).

The following recommendations apply to test conditions in both cases (items a) and b) above):

Number of turns

The number of turns should be in accordance with the values stated in the product specification.

For single-mode fibres, the attenuation increases in a linear fashion with the number of turns.

For each radius, the number of turns shall be chosen in such a way that:

- the induced loss is significantly higher than the detection limit of the set-up; when necessary, for example for low bend loss fibres, tests may be carried out with more turns than the specification requires – followed by linear normalization to the specified number;
- the induced loss is significantly lower than the onset of the non-linear region in the set-up; for bending radii in the range 5 mm to 10 mm this may imply that not more than 5 to 10 turns should be used.

Bend radius

¹ If there is excessive displacement between successive u-turns, the length of the sample arranged on two u-turns can be shorter than one coil. A maximum displacement between adjacent u-turns of 0,5 mm is therefore suggested.

The value of bend radius shall be in accordance with the values stated in the product specification².

Wavelength

The measurement wavelength shall be 1 550 nm or 1 625 nm, in accordance with the relevant product specification; it should be considered that bending losses increase exponentially with the wavelength.

NOTE The homogeneity of bend loss in different angular positions over the cross section needs to be verified either by multiple angular position tests or by verifying the homogeneity of the effective refractive index profile establishing the guiding properties of the bent fibre under test

5.1.3 Multimode (A1) fibres

Macrobending loss in A1 multimode fibres varies with bend radius and number of turns around a mandrel, but is rather independent of the measuring wavelength, except for possible oscillating effects with wavelength, which are related to successive mode groups passing cut-off and having increased bend loss at these wavelengths.

The values of bend radius and number of turns shall be in accordance with the values stated in the specification. When testing multiple turns, the attenuation that occurs over a specific turn depends on the attenuation of the preceding turns. The incremental macrobending added loss decreases with each added turn. Macrobending added loss produced by multiple turns should not be expressed in the units of “dB/turn” by dividing the total added loss by the number of turns. Instead it must be reported in dB for the specified number of bends. An extrapolation to more than the specified number of turns will result in an overestimation of the overall loss.

For multimode fibres only, the launching characteristics of the light source at the launching position of the fibre being tested shall be consistent with the expected fibre application. Further details on MM launching conditions can be found in IEC 61280-4-1.

5.2 Method B – Quarter circle bends

The fibre to be tested should be carefully set in the guide groove(s). See Figure 1. The beginning of each controlled bend shall be *s* metres apart from the beginning of the next controlled bend. The beginning of the controlled bend closest to the launch end shall be 1 m from launch. The end of the controlled bend closest to the detector end shall be 1 m from the detector. See Figure 2.

The minimum specimen length shall be determined according to the following Equation (1):

$$\begin{aligned}
 L &= (n-1) \times s + 2 \\
 s &= \frac{3}{2} \pi \times R + 2 \times R
 \end{aligned}
 \tag{1}$$

where

- L* is the minimum sample length, (m)
- n* is the number of quarter-turn bends,
- s* is the interval between each bend, (m) and
- R* is the slack bend radius (m).

² Bending loss on single-mode fibre increases exponentially as wavelength increases and as radius decreases (see Annex A).