

TECHNICAL REPORT

Optical amplifiers
Part 1: Parameters of amplifier components

STANDARD PREVIEW
(standards.iteh.ai)

[IEC TR 61292-1:2009](https://standards.iteh.ai/catalog/standards/sist/e3ebfc43-4173-4e53-8d67-e3dd294fb8e7/iec-tr-61292-1-2009)

<https://standards.iteh.ai/catalog/standards/sist/e3ebfc43-4173-4e53-8d67-e3dd294fb8e7/iec-tr-61292-1-2009>



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2009 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.

Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland
Email: inmail@iec.ch
Web: www.iec.ch

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: www.iec.ch/online_news/justpub

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: www.iec.ch/webstore/custserv

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch
Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00

TECHNICAL REPORT

Optical amplifiers – **STANDARD PREVIEW**
Part 1: Parameters of amplifier components
(standards.iteh.ai)

[IEC TR 61292-1:2009](https://standards.iteh.ai/catalog/standards/sist/e3ebfc43-4173-4e53-8d67-e3dd294fb8e7/iec-tr-61292-1-2009)

<https://standards.iteh.ai/catalog/standards/sist/e3ebfc43-4173-4e53-8d67-e3dd294fb8e7/iec-tr-61292-1-2009>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

PRICE CODE

R

ICS 33.160.10; 33.180.30

ISBN 978-2-88910-480-2

CONTENTS

FOREWORD.....	3
1 Scope and object.....	5
2 Normative references.....	5
3 Abbreviations.....	5
4 OFA components.....	6
5 Terms and definitions	6
5.1 Active fibre	6
5.2 Pump laser	8
5.3 WDM coupler.....	11
5.4 Optical isolator	12
5.5 ASE rejection filter.....	13
5.6 Pump rejection filter.....	13
5.7 Gain flattening filter (GFF)	14
5.8 Tap coupler	15
5.9 PIN-photodiode (PIN-PD).....	16
5.10 Variable optical attenuator (VOA).....	17
5.11 Optical connectors.....	18
Bibliography	19
Figure 1 – Example of the components inside an EDFA operating in a co-propagating pumping scheme.....	6

<https://standards.iteh.ai/catalog/standards/sist/e3ebfc43-4173-4e53-8d67-e3dd294fb8e7/iec-tr-61292-1-2009>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

OPTICAL AMPLIFIERS –

Part 1: Parameters of amplifier components

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with an IEC Publication.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

The main task of IEC technical committees is to prepare International Standards. However, a technical committee may propose the publication of a technical report when it has collected data of a different kind from that which is normally published as an International Standard, for example "state of the art".

IEC 61292-1, which is a technical report, has been prepared by subcommittee 86C: Fibre optic systems and active devices, of IEC technical committee 86: Fibre optics.

This second edition cancels and replaces the first edition published in 1998. It is a technical revision with updates reflecting new technology.

The text of this technical report is based on the following documents:

Enquiry draft	Report on voting
86C/853/DTR	86C/871/RVC

Full information on the voting for the approval of this technical report can be found in the report on voting indicated in the above table.

A list of all parts of the IEC 61292 series, published under the general title *Optical amplifiers*, can be found on the IEC website.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this technical report may be published later.

ITEH STANDARD PREVIEW
(standards.iteh.ai)

IEC TR 61292-1:2009

<https://standards.iteh.ai/catalog/standards/sist/e3ebfc43-4173-4e53-8d67-e3dd294fb8e7/iec-tr-61292-1-2009>

OPTICAL AMPLIFIERS –

Part 1: Parameters of amplifier components

1 Scope and object

This part of IEC 61292, which is a technical report, applies to optical components of rare-earth doped fibre amplifiers. It provides information about the most relevant parameters of optical components especially for erbium doped fibre amplifiers (EDFAs).

The object of this technical report is to provide introductory information for a better understanding of EDFA operation and applications.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC/TR 61931, *Fibre optic Terminology*

ITU-T Recommendation G. 650.1, *Definition and test methods for linear, deterministic attributes of single-mode fibre and cable*

[IEC TR 61292-1:2009](https://standards.iteh.ai/catalog/standards/sist/e3ebfc43-4173-4e53-8d67-e3dd294fb8e7/iec-tr-61292-1-2009)

NOTE A list of informative references is given in the Bibliography.

3 Abbreviations

For the purposes of this document, the following abbreviations apply.

ASE	amplified spontaneous emission
EDFA	erbium-doped fibre amplifier
EDF	erbium-doped fibre
OFA	optical fibre amplifier
OA	optical amplifier
RMS(r.m.s)	root mean square
LD	laser diode
TEC	thermo-electric cooler
FBG	fibre Bragg grating
FWHM	full-width at half maximum
WDM	wavelength division multiplexing
GFF	gain flattening filter
PIN-PD	PIN-photodiode
VOA	variable optical attenuator
EDF	erbium doped fibre
PDL	polarization dependent loss (variation)
PMD	polarization mode dispersion
MTBF	mean time between failure

FIT failure in time

4 OFA components

The parameters relevant for a satisfactory understanding of OFA operation are covered by the following optical component definitions:

- active fibre;
- pump laser;
- wavelength division multiplexing (WDM) coupler;
- optical isolator;
- amplified spontaneous emission (ASE) rejection filter;
- pump rejection filter;
- gain flattening filter (GFF);
- tap coupler;
- PIN-photodiode (PIN-PD);
- variable optical attenuator (VOA);
- optical connectors.

Figure 1 provides an example of the component layout for an OFA.

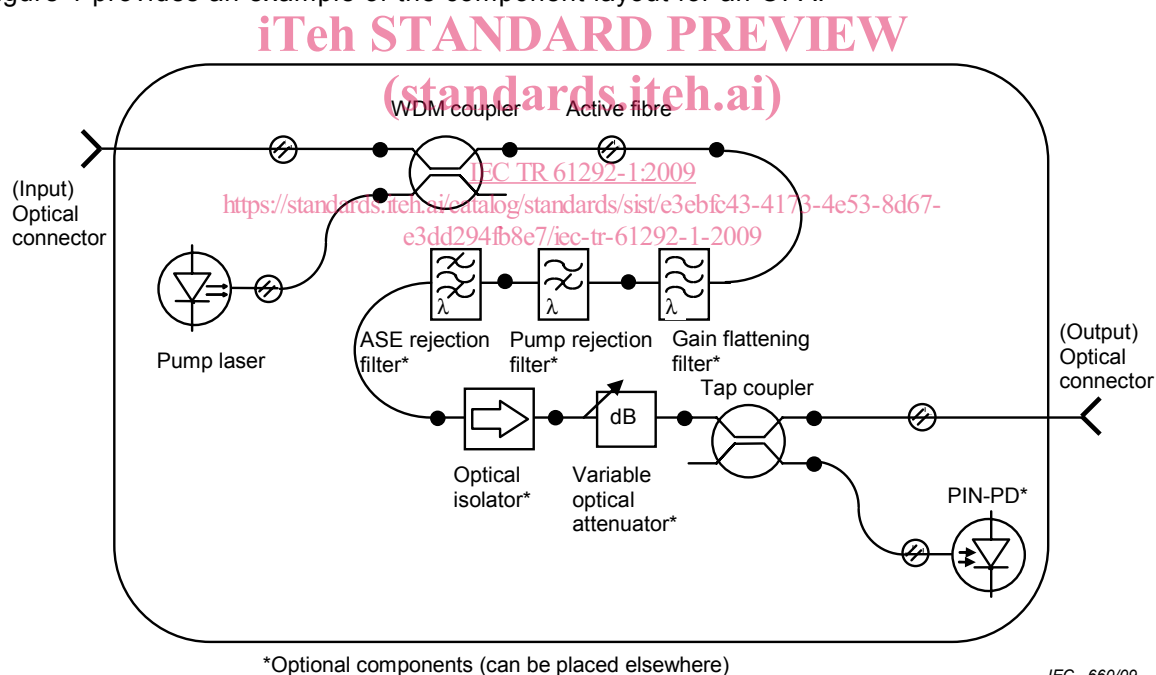


Figure 1 – Example of the components inside an EDFA operating in a co-propagating pumping scheme

5 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

5.1 Active fibre

The active fibre is used as gain media in OFA. Rare earth ion is generally doped in the core region of fibre to produce signal amplification, an Er^{3+} ion is applied for 1550-nm band OFA such as an erbium doped fibre amplifier (EDFA). Erbium doped fibre (EDF) absorbs light with a

wavelength of 980 nm or 1 480 nm for pumping, and emits infrared light with a wavelength in the 1 550-nm region. Optical amplification is realized utilizing stimulated emission of 1 530-nm luminescence.

5.1.1

active fibre maximum input signal power

optical power level associated with the input signal above which the active fibre gets damaged, causing impossibility of normal operation

5.1.2

active fibre insertion loss at out-of-band wavelength

active fibre insertion loss for a signal at out-of-band wavelength

5.1.3

active fibre polarization-dependent gain variation

maximum fibre gain variation due to variation of the state of polarization of the input signal

5.1.4

active fibre PMD

maximum PMD at the signal wavelength which is launched into the input port of the active fibre and exits from signal output port of the active fibre, expressed in ps (pico second)

NOTE 1 When an optical signal travels through an optical fibre, optical component or subsystem (such as an OFA), the change in the shape and width of the pulse due to the differential group delay (DGD) (the propagation delay difference between the two principal states of polarization (PSPs)) and to the waveform distortion for each PSP, is due to PMD. PMD, together with polarization dependent loss (PDL) and polarization dependent gain (PDG), may introduce large waveform distortions leading to an unacceptable bit error ratio increase.

NOTE 2 The level of PMD may depend on temperature and operating conditions.

5.1.5

active fibre mode field diameter

as in ITU-T Recommendation G.650.1 and IEC/TR 61931

5.1.6

active fibre cut-off wavelength

as in ITU-T Recommendation G.650.1 and IEC/TR 61931

5.1.7

active fibre cladding diameter

as in ITU-T Recommendation G.650.1 and IEC/TR 61931

5.1.8

active fibre cladding non-circularity

as in ITU-T Recommendation G.650.1 and IEC/TR 61931

5.1.9

active fibre mode field concentricity error

as in ITU-T Recommendation G.650.1 and IEC/TR 61931

5.1.10

active fibre composition

composition of the active fibre, intended as the host glass composition as well as the dopant element and its concentration

5.1.11

active fibre length

length of the active fibre. Changing fibre length can optimize gain characteristics of EDFA

5.1.12

active fibre dopant distribution

concentration of dopant rare-earth ions in the fibre as a function of the fibre radial coordinate

5.1.13

pumping efficiency

for a given active fibre, the slope of the gain versus pump optical power curve under specified operating conditions

5.1.14

saturation pump power

for a given active fibre, the pump optical power level above which the small-signal gain shows no further increase

5.1.15

threshold pump power

the minimum pump optical power necessary to reach a small-signal gain equal to 1 in a given active fibre when the fibre length is short enough so that the pump optical power remains constant along the fibre

5.1.16

active fibre operating temperature

temperature to be maintained for normal operating condition, given in the relevant detail specification

iTeh STANDARD PREVIEW

NOTE Amplification characteristics of active fibre strongly depend on its temperature. Thus, EDF in the many EDFA unit is maintained with the certain constant temperature. Many EDFA units include heater device or TEC in order to control active fibre temperature. Fibre operating temperatures of 40 °C ~ 70 °C are usually specified as operating temperature. Some of fixed gain EDFAs (especially smaller packaged EDFA), do not include this feature.

<https://standards.iteh.ai/catalog/standards/sist/e3ebfc43-4173-4e53-8d67-e3dd294fb8e7/iec-tr-61292-1-2009>

5.2 Pump laser

<https://standards.iteh.ai/catalog/standards/sist/e3ebfc43-4173-4e53-8d67-e3dd294fb8e7/iec-tr-61292-1-2009>

A pump laser is used to provide excitation energy for active fibre. By introducing the strong pumping light from a pump laser to active fibre, the signal light will be amplified by stimulated emission from a rare-earth ion such as Er^{3+} in EDF.

5.2.1

pumping wavelength

nominal wavelength of the emission spectrum of the pump laser. In EDFA, 980 nm and 1 480 nm are commonly used for pumping wavelength

5.2.2

pumping scheme

set-up of the EDFA characterized by the direction of pump optical power propagation with respect to signal direction

NOTE Usually, three schemes are used: co-propagating, where the pump and the signal propagate through the active fibre in the same direction; counter-propagating, where the signal and the pump propagate through the active fibre in opposite directions; bi-directional, where two pumps propagate simultaneously through the active fibre in both directions. Regarding pumping schemes other than pump direction, a polarization combining scheme and a wavelength combining scheme are considered for detailed design to enlarge pump power. However, a single laser diode pump scheme is described as a classic example in this technical report.

5.2.3

pumping power

optical power associated with the pump, injected into the active fibre

5.2.4

centre wavelength

pump efficiency of EDF depends on the overlap integral of EDF absorption spectrum and pump LD spectrum, so the centre wavelength of pump laser is crucial for EDF pumping

a) centroidal wavelength

Regarding many pump LDs of 980 nm and 1 480 nm, centroidal wavelength λ_{avg} is applied for centre wavelength λ_c . The centroidal wavelength is the mean or average wavelength of an optical spectrum of pump LD. The definition of centroidal wavelength is described as follows:

$$\lambda_{avg} = \left(\frac{1}{P_0} \right) \sum_{i=1}^N P_i \lambda_i$$

where

λ_i is the wavelength of the i^{th} peak point (nm) ;

i corresponds to mode number for output spectra of pump LD;

P_i is the power of the i^{th} peak point (nW) ; and

P_0 is the total power summed for all peak points (nW):

$$P_0 = \sum_{i=1}^N P_i$$

N is the number of peak points.

b) peak wavelength

Regarding some pump LDs of 980 nm and 1 480 nm with FBG stabilizer, peak wavelength λ_{peak} is applied for centre wavelength λ_c . The peak wavelength corresponds to the maximum power value of the optical spectrum of pump LD. The definition of peak wavelength is described as follows:

$$\lambda_c = \lambda_{peak}$$

NOTE Refer to IEC 61280-1-3 for details.

5.2.5

pumping spectral width

pump efficiency of EDF depends on the overlap integral of EDF absorption spectrum and pump LD spectrum, so the pumping spectral width of pump laser is crucial term for EDF pumping in order to quantify power band width of pump LD.

a) RMS spectral width

Regarding many pump LDs of 980 nm and 1 480 nm, RMS spectral width $\Delta\lambda_{rms}$ is applied for spectral width. The definition of RMS spectral width is described as follows:

$$\Delta\lambda_{rms} = \left[\frac{1}{P_0} \sum_{i=1}^N P_i (\lambda_i - \lambda_c)^2 \right]^{\frac{1}{2}}$$

b) full-width at half maximum

Regarding some pump LDs of 980 nm and 1 480 nm with FBG stabilizer, full-width at half maximum (FWHM) $\Delta\lambda_{fwhm}$ is applied for spectral width. The definition of FWHM spectral width is described as follows: