

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Optical amplifiers –
Part 1: Generic Specification**

**Amplificateurs optiques –
Partie 1: Spécification générique**

<https://standards.iteh.ai/catalog/standards/sist/892176-8f93-440f-90df-6ee548412a37/iec-61291-1-2012>



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2012 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.

Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

Useful links:

IEC publications search - www.iec.ch/searchpub

The advanced search enables you to find IEC publications by a variety of criteria (reference number, text, technical committee,...).

It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available on-line and also once a month by email.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 30 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary (IEV) on-line.

Customer Service Centre - webstore.iec.ch/csc/iec-

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch.

A propos de la CEI

La Commission Electrotechnique Internationale (CEI) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications CEI

Le contenu technique des publications de la CEI est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente. un corrigendum ou amendement peut avoir été publié.

Liens utiles:

Recherche de publications CEI - www.iec.ch/searchpub

La recherche avancée vous permet de trouver des publications CEI en utilisant différents critères (numéro de référence, texte, comité d'études,...).

Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

Just Published CEI - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications de la CEI. Just Published détaille les nouvelles publications parues. Disponible en ligne et aussi une fois par mois par email.

Electropedia - www.electropedia.org

Le premier dictionnaire en ligne au monde de termes électroniques et électriques. Il contient plus de 30 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans les langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (VEI) en ligne.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: csc@iec.ch.

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Optical amplifiers –
Part 1: Generic Specification**

**Amplificateurs optiques –
Partie 1: Spécification générique**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

PRICE CODE
CODE PRIX



ICS 33.180.20

ISBN 978-2-8322-0074-2

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

CONTENTS

FOREWORD.....	3
1 Scope and object.....	5
2 Normative references	5
3 Terms, definitions and abbreviations	6
3.1 Overview	6
3.2 Terms and definitions	8
3.2.1 OA devices and distributed amplifiers	8
3.2.2 OA-assemblies	20
3.3 Abbreviated terms	23
4 Classification.....	24
5 Requirements	25
5.1 Preferred values.....	25
5.2 Sampling.....	25
5.3 Product identification for storage and shipping.....	25
5.3.1 Marking	25
5.3.2 Labelling.....	25
5.3.3 Packaging	25
6 Quality assessment	25
7 Electromagnetic compatibility (EMC) requirements	25
8 Test methods	26
Bibliography.....	27
Index of definitions	28
Figure 1 – OA device and assemblies	7
Figure 2 – Optical amplifier in a multichannel application	8
Table 1 – Grouping of parameters and corresponding test methods or references	26

INTERNATIONAL ELECTROTECHNICAL COMMISSION

OPTICAL AMPLIFIERS –

Part 1: Generic Specification

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61291-1 has been prepared by subcommittee 86C: Fibre optic systems and active devices, of IEC technical committee 86: Fibre optics.

This third edition cancels and replaces the second edition published in 2006. It is a technical revision that includes the following significant changes: the definitions related to transient behaviour have been extensively updated with terms from the 61290-4 series and the definition for gain ripple has been added.

The text of this standard is based on the following documents:

CDV	Report on voting
86C/1013/CDV	86C/1041/RVC

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all the parts in the IEC 61291 series, published under the general title *Optical amplifiers*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

Withhold
iTeh STANDARD PREVIEW
(standards.itih.ai)
<https://standards.itih.ai/catalog/standards/sist/892176-8f93-440f-90df-6ee548412a37/iec-61291-1-2012>

OPTICAL AMPLIFIERS –

Part 1: Generic Specification

1 Scope and object

This part of IEC 61291 applies to all commercially available optical amplifiers (OAs) and optically amplified assemblies. It applies to OAs using optically pumped fibres (OFAs based either on rare-earth doped fibres or on the Raman effect), semiconductors (SOAs), and waveguides (POWAs). The object of this standard is:

- to establish uniform requirements for transmission, operation, reliability and environmental properties of OAs;
- to provide assistance to the purchaser in the selection of consistently high-quality OA products for his particular applications.

Parameters specified for OAs are those characterizing the transmission, operation, reliability and environmental properties of the OA seen as a “black box” from a general point of view. In the sectional and detail specifications a subset of these parameters will be specified according to the type and application of the particular OA device or assembly.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61290 (all parts), *Optical amplifiers – Test methods*

IEC 61290-1-1, *Optical amplifiers – Test methods – Part 1-1: Power and gain parameters – Optical spectrum analyzer method*

IEC 61290-1-2, *Optical amplifiers – Test methods – Part 1-2: Power and gain parameters – Electrical spectrum analyzer method*

IEC 61290-1-3, *Optical amplifiers – Test methods – Part 1-3: Power and gain parameters – Optical power meter method*

IEC 61290-3-1, *Optical amplifiers – Test methods – Part 3-1: Noise figure parameters – Optical spectrum analyzer method*

IEC 61290-3-2, *Optical amplifiers – Test methods – Part 3-2: Noise figure parameters – Electrical spectrum analyzer method*

IEC 61290-4-1, *Optical amplifiers – Test methods – Part 4-1: Gain transient parameters – Two wavelength method*

IEC 61290-4-2, *Optical amplifiers – Test methods – Part 4-2: Gain transient parameters – Broadband source method*

IEC 61290-5-1, *Optical amplifiers – Test methods – Part 5-1: Reflectance parameters – Optical spectrum analyzer method*

IEC 61290-5-2, *Optical amplifiers – Test methods – Part 5-2: Reflectance parameters – Electrical spectrum analyzer method*

IEC 61290-5-3, *Optical fibre amplifiers – Basic specification– Part 5-3: Test methods for reflectance parameters – Reflectance tolerance using an electrical spectrum analyzer*

IEC 61290-6-1, *Optical fibre amplifiers – Basic specification – Part 6-1: Test methods for pump leakage parameters – Optical demultiplexer*

IEC 61290-7-1, *Optical amplifiers – Test methods – Part 7-1: Out-of-band insertion losses – Filtered optical power meter method*

IEC 61290-10-1, *Optical amplifiers – Test methods – Part 10-1: Multichannel parameters – Pulse method using an optical switch and optical spectrum analyzer*

IEC 61290-10-2, *Optical amplifiers – Test methods – Part 10-2: Multichannel parameters – Pulse method using a gated optical spectrum analyzer*

IEC 61290-10-3, *Optical amplifiers – Test methods – Part 10-3: Multichannel parameters – Probe methods*

IEC 61290-10-4, *Optical amplifiers – Test methods – Part 10-4: Multichannel parameters – Interpolated source subtraction method using an optical spectrum analyzer*

IEC 61290-11-1, *Optical amplifiers – Test methods – Part 11-1: Polarization mode dispersion parameter – Jones matrix eigenanalysis (JME)*

IEC 61290-11-2, *Optical amplifiers – Test methods – Part 11-2: Polarization mode dispersion parameter – Poincaré sphere analysis method*

IEC 61291-2, *Optical amplifiers – Part 2: Digital applications – Performance specification template*

IEC 61291-4, *Optical amplifiers – Part 4: Multichannel applications – Performance specification template*

IEC 61291-5-2, *Optical amplifiers – Part 5-2: Qualification specifications – Reliability qualification for optical fibre amplifiers*

IEC/TR 61292-3, *Optical amplifiers – Part 3: Classification, characteristics and applications*

IEC Guide 107, *Electromagnetic compatibility – Guide to the drafting of electromagnetic compatibility publications*

3 Terms, definitions and abbreviations

3.1 Overview

The definitions listed in this clause refer to the meaning of the terms used in the specifications of OAs. Only those parameters listed in the appropriate specification template, as in IEC 61291-2 and IEC 61291-4, are intended to be specified.

NOTE 1 The numbered terms in this clause are indexed and cross-referenced in Annex A.

The list of parameter definitions of OAs, given in this clause, is divided into two parts: the first part, in 3.1.2, lists those parameters relevant for OA devices, namely power, pre-, line- and

distributed amplifiers; the second part, in 3.2, lists the parameters relevant for optically amplified, elementary assemblies, namely the optically amplified transmitter (OAT) and the optically amplified receiver (OAR).

In any case where the value of a parameter is given for a particular device, it will be necessary to specify certain appropriate operating conditions such as temperature, bias current, pump optical power, etc. In this clause, two different operating conditions are referred to: nominal operating conditions, which are those suggested by the manufacturer for normal use of the OA, and limit operating conditions, in which all the parameters adjustable by the user (e.g. temperature, gain, pump laser injection current, etc.) are at their maximum values, according to the absolute maximum ratings stated by the manufacturer.

The OA shall be considered as a “black box”, as shown in Figure 1. The OA device shall have two optical ports, namely an input and an output port (Figure 1a)). The OAT and OAR are to be considered as an OA integrated on the transmitter side or on the receiver side, respectively. Both kinds of integration imply that the connection between the transmitter or the receiver and the OA is proprietary and not to be specified. Consequently, only the optical output port can be defined for the OAT (after the OA, as shown in Figure 1b) and only the optical input port can be defined for the OAR (before the OA, as shown in Figure 1c)). The optical ports may consist of unterminated fibres or optical connectors. Electrical connections for power supply (not shown in Figure 1) are also necessary. Following this “black box” approach, the typical loss of one connection and the corresponding uncertainty will be included within the values of gain, noise figure and other parameters of the OA device.

NOTE 2 For distributed amplifiers, as described in Clause 4, this black-box configuration may be simulated for test purposes, for example by attaching a reference fibre to test a Raman pump unit.

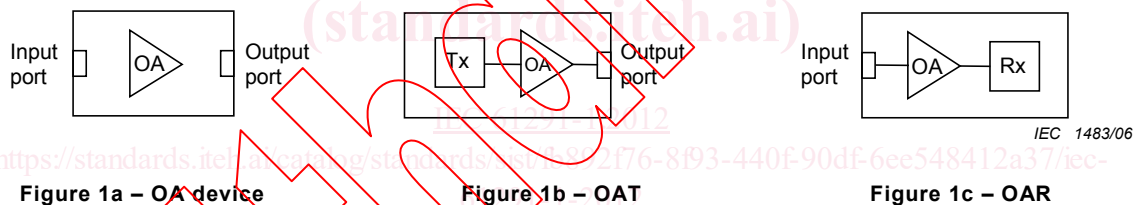


Figure 1 – OA device and assemblies

The OA amplifies signals in a nominal operating wavelength region. In addition, other signals outside of the band of operating wavelength can in some applications, also cross the OA. The purpose of these out-of-band signals and their wavelength, or wavelength region, can be specified in the detail specifications.

When signals at multiple wavelengths are incident on the OA, as is the case in multichannel systems, suitable adjustment of the definitions of some existing relevant parameters is needed together with the introduction of definitions of new parameters relevant to this different application.

A typical configuration of an OA in a multichannel application is shown in Figure 2. At the transmitting side m signals, coming from m optical transmitters, Tx_1, Tx_2, \dots, Tx_m , each with a unique wavelength, $\lambda_1, \lambda_2, \dots, \lambda_m$, respectively, are combined by an optical multiplexer (OM). At the receiving side the m signals at $\lambda_1, \lambda_2, \dots, \lambda_m$, are separated with an optical demultiplexer (OD) and routed to separate optical receivers, Rx_1, Rx_2, \dots, Rx_m , respectively. To characterize the OA in this multichannel application, an input reference plane and an output reference plane are defined at the OA input and output ports, respectively, as shown in Figure 2.

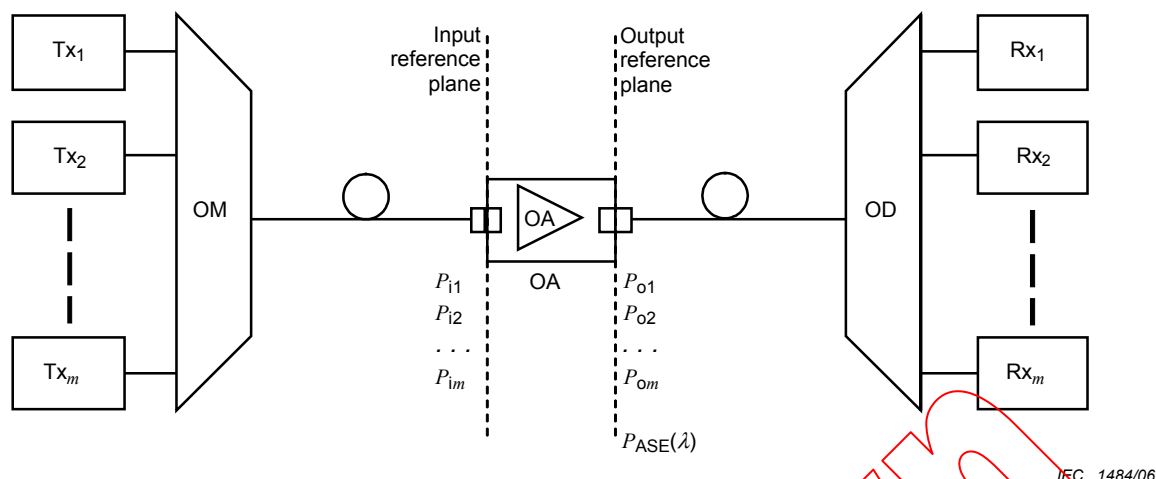


Figure 2 – Optical amplifier in a multichannel application

At the input reference plane, m input signals at the m wavelengths are considered, each with a unique power level, $P_{i1}, P_{i2}, \dots, P_{im}$, respectively. At the output reference plane, m output signals at the m wavelengths, resulting from the optical amplification of the corresponding m input signals, are considered, each with power level $P_{o1}, P_{o2}, \dots, P_{om}$, respectively. Moreover, the amplified spontaneous emission, ASE, with a noise power spectral density, $P_{ASE}(\lambda)$, is also to be considered at the OA output port.

Most definitions of relevant single-channel parameters can be suitably extended to multichannel applications. When this extension is straightforward, the word “channel” will be added to the pertinent parameter. In particular, the noise figure and the signal-spontaneous noise figure may be extended to multichannel applications, channel by channel, by considering the value of $P_{ASE}(\lambda)$ at each channel wavelength and the channel signal bandwidth. For each channel wavelength there will be a unique value of noise figure that will be a function of the input power level of all signals. In this case the parameters, channel noise figure and channel signal-spontaneous noise figure, are introduced. However some additional parameters also need to be defined. For each parameter, the particular multichannel configuration, including the full set of channel signal wavelengths and input powers, needs to be specified.

NOTE 3 Except where noted, the optical powers mentioned in the following are intended as average powers.

NOTE 4 The parameters defined below will in general depend also on temperature and polarization state of input channels. The temperature and state of polarization should be kept constant or controlled or be measured and reported together with the measured parameter.

NOTE 5 It should be noted that the measured optical powers are open beam powers: this can result in differences of about 0,18 dB in the measurement of absolute power levels.

NOTE 6 In the case of the distributed amplifier, all the parameters are related to a suitable reference fibre used to emulate the transmission fibre in conjunction with the pumping assembly.

3.2 Terms and definitions

3.2.1 OA devices and distributed amplifiers

For the purposes of this document, the following terms and definitions apply.

NOTE These terms and conditions furthermore apply, in general, to optical amplifiers under the IEC 61290 and IEC 61291 series.

3.2.1.1**gain**

in an OA which is externally connected to an input jumper fibre, the increase of signal optical power from the output end of the jumper fibre to the OA output port, expressed in dB

Note 1 to entry: The gain includes the connection loss between the input jumper fibre and the OA input port.

Note 2 to entry: It is assumed that the jumper fibres are of the same type as the fibres used as input and output port of the OA.

Note 3 to entry: Care should be taken to exclude the amplified spontaneous emission power from the signal optical powers.

3.2.1.2**small-signal gain**

gain of the amplifier, when operated in linear regime, where it is essentially independent of the input signal optical power, at a given signal wavelength and pump optical power level

Note 1 to entry: This property can be described at a discrete wavelength or as a function of wavelength.

3.2.1.3**reverse gain**

gain measured using the input port of the OA as output port and vice versa

3.2.1.4**reverse small-signal gain**

small-signal gain measured using the input port of the OA as output port and vice versa

3.2.1.5**maximum gain**

highest gain that can be achieved when the OA is operated within the stated nominal operating conditions

3.2.1.6**maximum small-signal gain**

highest small-signal gain that can be achieved when the OA is operated within the stated nominal operating conditions

3.2.1.7**maximum gain wavelength**

wavelength at which the maximum gain occurs

3.2.1.8**maximum small-signal gain wavelength**

wavelength at which the maximum small-signal gain occurs

3.2.1.9**wavelength variation**

peak-to-peak variation of the gain over a given wavelength range

3.2.1.10**small-signal gain wavelength variation**

peak-to-peak variation of the small-signal gain over a given wavelength range

3.2.1.11**gain-slope under single wavelength operation** (for analogue operation)

in the presence of a signal of given wavelength and input power, the derivative of the gain of a small probe versus wavelength, at the signal wavelength

Note 1 to entry: The probe total average power level must be at least 20 dB below the input signal level, to minimize the effect on the gain wavelength-profile.

3.2.1.12
polarization-dependent gain
PDG

the maximum variation of the OA gain due to a variation of the state of polarization of the input signal, at nominal operating conditions

Note 1 to entry: A source of PDG in OAs is the polarization dependent loss of the passive components used inside.

3.2.1.13
channel gain (for multichannel operation)

gain for each channel (at wavelength λ_j) in a specified multichannel configuration

Channel gain can be expressed as follows (P_{ij} and P_{oj} being respectively the input and output power levels, in dBm, of the j -th channel and $j = 1, 2, \dots, n$; n total number of channels):

$$G_j = P_{oj} - P_{ij}$$

Note 1 to entry: Channel gain is expressed in dB.

Note 2 to entry: Since the amplifier saturation power level is determined by the combined effect of the input signals at all wavelengths, the channel gain is dependent on the input power level of all signals.

3.2.1.14
multichannel gain variation (interchannel gain difference) (for multichannel operation)

difference between the channel gains of any two of the channels in a specified multichannel configuration

Multichannel gain variation can be expressed as follows (G_j and G_l being respectively the channel gains of j -th and l -th channel and $j, l = 1, 2, \dots, n$; $j \neq l$; n total number of channels):

$$\Delta G_{jl} = G_j - G_l$$

Note 1 to entry: Multichannel gain variation is expressed in dB.

Note 2 to entry: Normally this parameter is specified as the maximum multichannel gain variation, intended as the maximum absolute value of multichannel gain variation, considering all possible combinations of channel pairs. The input power levels would normally be set to their minimum and maximum specified values. Input power levels may also be specified to achieve certain gain values or total output power levels. Maximum multichannel gain variation can be expressed as follows:

$$\Delta G_{MAX} = MAX_{j,l} \{|\Delta G_{jl}|\}$$

Note 3 to entry: Maximum multichannel gain variation is expressed in dB.

Note 4 to entry: This parameter is often referred to as gain flatness.

3.2.1.15
gain cross-saturation (for multichannel operation)

ratio of the change in channel gain of one channel, ΔG_j , to a given change in the input power level of another channel, ΔP_l , while the input power levels of all other channels are kept constant, in a specified multichannel configuration

Gain cross-saturation can be expressed as follows ($j, l = 1, 2, \dots, n$; $j \neq l$; n total number of channels):

$$GXS_{jl} = \Delta G_j / \Delta P_l$$

Note 1 to entry: Gain cross-saturation is expressed in dB per dB.

Note 2 to entry: Normally, this parameter is specified for an initial input power distribution among channels in which each channel is at the minimum allowed power level. Other distributions may be indicated in the appropriate product specification.

3.2.1.16

interchannel crosstalk (for multichannel operation)
under consideration.

3.2.1.17

multichannel gain-change difference (interchannel gain-change difference)
(multichannel)

for a specified channel allocation, the difference of change in gain in one channel with respect to the change in gain of another channel for two specified sets of channel input powers

Multichannel gain-change difference can be expressed as follows ($G_j^{(1)}$, $G_j^{(2)}$ and $G_l^{(1)}$, $G_l^{(2)}$ being the channel gains of the j -th and l -th channel at each of the two specified sets of channel input power (1) and (2) respectively, and $j, l = 1, 2, \dots, n$; n total number of channels):

$$GD_{jl} = [G_j^{(1)} - G_j^{(2)}] - [G_l^{(1)} - G_l^{(2)}]$$

Note 1 to entry: Multichannel gain-change difference is expressed in dB.

Note 2 to entry: The two specified sets of channel input power are in general: (1) all input power levels set to the minimum value and (2) all input power levels set to the maximum value.

Note 3 to entry: Normally, the maximum multichannel gain-change difference will be specified. Different sets of input conditions could be defined in the appropriate product specification.

Note 4 to entry: Forward ASE power level can be relevant for OA's used as pre-amplifiers or line amplifiers. In this case the channel input power will include the forward ASE contribution coming from previous OAs.

Note 5 to entry: This parameter can be used instead of the multichannel gain tilt when the definition of the gain tilt cannot be applied.

3.2.1.18

multichannel gain tilt (interchannel gain-change ratio or dynamic gain tilt – DGT) for multichannel operation

ratio of the changes in gain in each channel to the change in gain at a reference channel as the input conditions are varied from one set of input channel powers to a second set of input channel powers

Multichannel gain tilt can be expressed as follows ($G_j^{(1)}$, $G_j^{(2)}$ and $G_r^{(1)}$, $G_r^{(2)}$ being respectively the channel gains of the j -th and the reference channel at each of the two specified sets of channel input power and $j = 1, 2, \dots, n$; n total number of channels):

$$GT_j = [G_j^{(1)} - G_j^{(2)}] / [G_r^{(1)} - G_r^{(2)}]$$

Note 1 to entry: Multichannel gain tilt is expressed in dB per dB.

Note 2 to entry: Multichannel gain tilt is normally used to predict the gains for each channel for various sets of input channel powers based on observed changes in the reference channel.

Note 3 to entry: The sets of input channel powers are generally those in which (1) all power levels are set equal to the maximum allowed and (2) all powers are set equal to the minimum allowed.

Note 4 to entry: The reference channel should be specified in the appropriate product specification. The multichannel gain tilt of the reference channel is by definition equal to 1 dB/dB.

Note 5 to entry: Application of multichannel gain tilt to prediction of channel gain in different conditions could be impaired in the case of hybrid multistage amplifiers, inhomogeneous gain media and in particular for amplifiers with automatic gain control.

3.2.1.19

(removed)

3.2.1.20

(removed)

3.2.1.21

(removed)

3.2.1.22

on-off gain (only applicable to distributed amplifier)

the increase in signal optical power from the output of an optical fibre providing distributed amplification when the pumping is active compared to when the pumping is disabled, expressed in dB. This is sometimes referred to as "effective gain".

Note 1 to entry: The on-off gain differs from gain in that it does not compare the output signal power with the input signal power, since this includes the attenuation of the fibre and this loss can be associated with the transmission system rather than the amplifier. The value for on-off gain is thus higher than for gain by the amount of passive loss between the input and output.

3.2.1.23

net on-off gain (only applicable to distributed amplifier)

the increase in signal optical power from the output of an optical fibre providing distributed amplification when the pumping is active compared to when no additional fibre optic equipment is installed to the fibre for the purpose of providing distributed amplification

3.2.1.24

wavelength band

the wavelength range within which the OA output signal power is maintained in the specified output power range, when the corresponding input signal power lies within the specified input power range

3.2.1.25

available signal wavelength band (for pre-amplifiers with optical filter(s) only)

the resulting pre-amplifier wavelength band including the effect of optical filter(s)

3.2.1.26

tunable wavelength range (for pre-amplifiers with tunable optical filter(s) only)

the wavelength range, of the wavelength band, within which the tunable optical filter(s) inside the pre-amplifier can be tuned

3.2.1.27

channel allocation (for multichannel operation)

channel allocation is given by the number of channels, the nominal central frequencies/wavelengths of the channels and their central frequency/wavelength tolerance

3.2.1.28

gain stability

degree of gain fluctuation expressed by the ratio (in dB) of the maximum and minimum gain, for a certain specified test period, under nominal operating conditions

3.2.1.29

small-signal gain stability

degree of small-signal gain fluctuation expressed by the ratio (in dB) of the maximum and minimum small-signal gain, for a certain specified test period, under nominal operating conditions

3.2.1.30

maximum gain variation with temperature

change in gain for temperature variation within a specified range, expressed in dB

3.2.1.31

maximum small-signal gain variation with temperature

change in small-signal gain for temperature variation within a specified range, expressed in dB

3.2.1.32**large-signal output stability**

degree of output optical power fluctuation expressed by the ratio (in dB) of the maximum and minimum output signal optical powers, for a certain specified test period, under nominal operating conditions and a specified large input signal optical power

3.2.1.33**saturation output power (gain compression power)**

optical power level associated with the output signal above which the gain is reduced by N dB (typically $N = 3$) with respect to the small-signal gain at the signal wavelength

Note 1 to entry: The wavelength at which the parameter is specified should be stated.

3.2.1.34**nominal output signal power**

minimum output signal optical power for a specified input signal optical power, under nominal operating conditions

3.2.1.35**maximum output signal power**

highest optical power associated with the output signal that can be obtained from the OA at nominal operating conditions

3.2.1.36**input power range**

range of optical power levels such that, for any input signal power of the OA which lies in this range, the corresponding output signal optical power lies in the specified output power range, where the OA performance is ensured

3.2.1.37**output power range**

range of optical power levels in which the output signal optical power of the OA lies when the corresponding input signal power lies in the specified input power range, where the OA performance is ensured

3.2.1.38**noise figure**

NF

decrease of the signal-to-noise ratio (SNR), at the output of an optical detector with unitary quantum efficiency and zero excess noise, due to the propagation of a shot noise-limited signal through the OA, expressed in decibels (dB)

Note 1 to entry: The operating conditions at which the noise figure is specified should be stated.

Note 2 to entry: This property can be described as a discrete wavelength or as a function of wavelength.

Note 3 to entry: The noise degradation due to the OA, is attributable to different factors, e.g. signal-spontaneous beat noise, spontaneous-spontaneous beat noise, internal reflections noise, signal shot noise, spontaneous shot noise. Each of these factors depends on various conditions which should be specified for a correct evaluation of the noise figure.

Note 4 to entry: By convention this noise figure is a positive number.

Note 5 to entry: In the case of OAs for analogue applications the noise figure also represents the ratio between input and the output carrier-to-noise ratios.

3.2.1.39**noise factor**

F

noise figure expressed in linear form