

# INTERNATIONAL STANDARD



**Energy performance of lamp controlgear –  
Part 2: Controlgear for high intensity discharge lamps (excluding fluorescent  
lamps) – Method of measurement to determine the efficiency of controlgear**

IEC 62442-2:2018

<https://standards.iteh.ai/en/standards/iec/29ae19f6-813d-4098-bbef-0968e4e2e4ed/iec-62442-2-2018>



**THIS PUBLICATION IS COPYRIGHT PROTECTED**  
**Copyright © 2018 IEC, Geneva, Switzerland**

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland

Tel.: +41 22 919 02 11  
[info@iec.ch](mailto:info@iec.ch)  
[www.iec.ch](http://www.iec.ch)

#### **About the IEC**

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

#### **About IEC publications**

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

#### **IEC Catalogue - [webstore.iec.ch/catalogue](http://webstore.iec.ch/catalogue)**

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

#### **IEC publications search - [webstore.iec.ch/advsearchform](http://webstore.iec.ch/advsearchform)**

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

#### **IEC Just Published - [webstore.iec.ch/justpublished](http://webstore.iec.ch/justpublished)**

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

#### **Electropedia - [www.electropedia.org](http://www.electropedia.org)**

The world's leading online dictionary of electronic and electrical terms containing 21 000 terms and definitions in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

#### **IEC Glossary - [std.iec.ch/glossary](http://std.iec.ch/glossary)**

67 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

#### **IEC Customer Service Centre - [webstore.iec.ch/csc](http://webstore.iec.ch/csc)**

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: [sales@iec.ch](mailto:sales@iec.ch).

IEC 62442-2:2018

<https://standards.iteh.ai/en/standards/iec/29ae19f6-813d-4098-bbef-0968e4e2e4ed/iec-62442-2-2018>

# INTERNATIONAL STANDARD



**Energy performance of lamp controlgear –  
Part 2: Controlgear for high intensity discharge lamps (excluding fluorescent  
lamps) – Method of measurement to determine the efficiency of controlgear**

<https://standards.iteh.ai/en/standards/iec/20ac19f6-813d-4098-bbef-0968e4e2e4ed/iec-62442-2-2018>

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

ICS 29.140.99

ISBN 978-2-8322-5683-1

**Warning! Make sure that you obtained this publication from an authorized distributor.**

## CONTENTS

FOREWORD .....	3
1 Scope .....	5
2 Normative references .....	5
3 Terms and definitions .....	6
4 General .....	8
4.1 Applicability .....	8
4.2 General notes on tests .....	8
4.3 Controllable controlgear .....	8
4.4 Multi-lamp type controlgear .....	8
4.5 Measurement uncertainty .....	8
4.6 Sampling of controlgear for testing .....	8
4.7 <del>Number</del> Size of the test samples .....	8
4.8 Power supply .....	8
4.9 Supply voltage waveform .....	9
4.10 Instrument accuracy .....	9
4.11 Multi-rated voltage controlgear .....	10
4.12 <del>Sensor and network connections</del> .....	10
5 Method of measurement of the input power and calculation of the efficiency of controlgear for high intensity discharge lamps .....	10
5.1 Measurement setup: electromagnetic <del>wire wound</del> controlgear .....	10
5.2 Efficiency calculation: <del>Magnetic wire wound</del> electromagnetic controlgear .....	11
5.3 Measurement setup: electronic controlgear .....	11
5.4 Efficiency calculation: electronic controlgear .....	12
5.5 Standby power measurement of electronic controlgear .....	12
Bibliography .....	14
Figure 1 – Measurement setup for electromagnetic controlgear .....	10
Figure 2 – Measurement setup for electronic controlgear .....	11
Figure 3 – Measurement setup of the standby power of electronic controlgear .....	12
Table 1 – Typical nominal electricity supply details for some regions .....	9

## INTERNATIONAL ELECTROTECHNICAL COMMISSION

## ENERGY PERFORMANCE OF LAMP CONTROLGEAR –

**Part 2: Controlgear for high intensity discharge lamps  
(excluding fluorescent lamps) – Method of measurement  
to determine the efficiency of controlgear**

## FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

**This redline version of the official IEC Standard allows the user to identify the changes made to the previous edition. A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text.**

International Standard IEC 62442-2 has been prepared by subcommittee 34C: Auxiliaries for lamps, of IEC technical committee 34: Lamps and related equipment.

This second edition cancels and replaces the first edition published in 2014. This edition constitutes a technical revision and has been harmonized with IEC 62442-1 and IEC 62442-3.

The text of this International Standard is based on the following documents:

CDV	Report on voting
34C/1336A/CDV	34C/1377/RVC

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 62442 series, published under the general title *Energy performance of lamp controlgear*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

**IMPORTANT – The “colour inside” logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this publication using a colour printer.**

## ENERGY PERFORMANCE OF LAMP CONTROLGEAR –

### Part 2: Controlgear for high intensity discharge lamps (excluding fluorescent lamps) – Method of measurement to determine the efficiency of controlgear

#### 1 Scope

This part of IEC 62442 defines a measurement method of the power losses of electromagnetic controlgear, the total input power and the standby power of electronic controlgear for high intensity discharged lamps (excluding fluorescent lamps). A calculation method of the efficiency of controlgear for high intensity discharged lamp(s) is also defined.

It is assumed that the controlgear are designed for use on DC supplies up to 1 000 V and/or AC supplies up to 1 000 V at 50 Hz or 60 Hz.

This document applies to electrical controlgear-lamp circuits comprised solely of the controlgear and of the lamp(s).

NOTE Requirements for testing individual controlgear during production are not included.

This document specifies the measurement method for the total input power, the standby power and the calculation method of the lamp controlgear efficiency for all controlgear sold for domestic and normal commercial purposes operating with high intensity discharge lamps.

This document does not apply to

- controlgear which form an integral part of lamps;
- controlgear circuits with capacitors connected in series;
- controllable ~~wire-wound~~ electromagnetic controlgear.

#### 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61347-1:2007 2015, *Lamp controlgear – Part 1: General and safety requirements*  
~~Amendment 1:2010~~  
~~Amendment 2:2012~~

IEC 61347-2-9:2012, *Lamp controlgear – Part 2-9: Particular requirements for electromagnetic controlgear for discharge lamps (excluding fluorescent lamps)*

IEC 61347-2-12:2010, *Lamp controlgear – Part 2-12: Particular requirements for d.c. or a.c. supplied electronic ballasts for discharge lamps (excluding fluorescent lamps)*

IEC Guide 115:2007, *Application of uncertainty of measurement to conformity assessment activities in the electrotechnical sector*

### 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

#### 3.1

##### **nominal value**

suitable approximate quantity value used to designate or identify a component, device or equipment

[SOURCE: IEC 62442-1:2014 2018, 3.1]

#### 3.2

##### **rated value**

quantity value for specified operating conditions of a component, device or equipment

**Note 1 to entry:** The value and conditions are specified in the relevant standard or assigned by the manufacturer or responsible vendor.

[SOURCE: IEC 62442-1:2014 2018, 3.3, modified — Note 2 has been removed deleted.]

#### 3.3

##### **controlgear**

one or more components between the supply and one or more lamps which may serve to transform the supply voltage, limit the current of the lamp(s) to the required value, provide starting voltage and preheating current, prevent cold starting, correct power factor or reduce radio interference

[SOURCE: IEC 62442-1:2014 2018, 3.4]

#### 3.4

##### **electromagnetic controlgear**

##### **magnetic controlgear**

controlgear which, by means of inductance, or a combination of inductance and capacitance, serves mainly to limit the current of the lamp(s) to the required value and operates the lamp(s) at the same frequency as the supply frequency

**Frequency of the lamp controlgear is the same as supply frequency**

[SOURCE: IEC 62442-1:2014 2018, 3.5]

#### 3.5

##### **electronic controlgear**

<high intensity discharge lamps> AC and/or DC supplied electronic circuit including stabilizing elements for starting and operating one or more lamp(s)

#### 3.6

##### **discharge lamp**

lamp in which the light is produced, directly or indirectly, by an electric discharge through a gas, a metal vapour or a mixture of several gases and vapours



**3.7****controlgear-lamp circuit**

electrical circuit, or part thereof, normally built in a luminaire, consisting of the controlgear and lamp(s)

[SOURCE: IEC 62442-1:2014 2018, 3.8]

**3.8****standby mode**

~~mode relevant for those controlgear which are permanently connected to the mains, where the lamp(s) are switched off via a control signal, not including failed lamp(s)~~

~~Note 1 to entry: The ignition phase of lamp(s) is excluded from the standby mode.~~

mode of the controlgear, in which the light source is switched off by a control signal, while the controlgear remains connected to the mains supply

**3.9****standby power**

average power consumption of a controlgear ~~when subjected to~~ in the standby mode

Note 1 to entry: Power supplied by controlgear to sensors, network connections and other auxiliaries is not include in the standby power.

Note 2 to entry: Standby power is expressed in W.

**3.10****total input power**

total power ~~supplied to~~ consumed by the controlgear-lamp (light source) circuit measured at rated input voltage

[SOURCE: IEC 62442-1:2014 2018, 3.13, modified — ~~The sentence "The rated power specified is related to a specific ballast lumen factor (BLF)." has been removed~~ "supplied to" has been replaced with "consumed by", "(light source)" has been added and the note has been deleted.]

**3.11****efficiency of lamp controlgear ~~efficiency~~**

$\eta_{MCG}$

$\eta_{ECG}$

< high intensity discharge lamps > ~~ratio between the lamp power (controlgear output power) and the input power of the controlgear — lamp circuit with possible sensors, network connections and other auxiliary loads disconnected~~

ratio of the output power to lamp(s) and input power of the controlgear

Note 1 to entry: Detailed measurement methods and conditions are given in Clause 5.

Note 2 to entry: Loads from sensors, network connections or other auxiliaries are disconnected or, if not possible, otherwise eliminated from the result.

**3.12****multi-lamp type controlgear**

controlgear designed for the operation of more than one type of lamp with different electrical characteristics, for example power

## 4 General

### 4.1 Applicability

The measurement and calculation methods in this document shall only be used for lamp controlgear which conforms to ~~IEC 61347-1 with~~ IEC 61347-2-9 or ~~IEC 61347-1 with~~ IEC 61347-2-12.

### 4.2 General notes on tests

The measurement conditions ~~are~~ specified in IEC 61347-1:2007 2015, Clauses H.1, H.2, H.4, H.8, H.9 and H.11 **shall be applied**; unless otherwise specified in this document. The device under test (DUT) shall be placed according to IEC 61347-1:2007 2015, Figure H.1.

An AC **or DC** voltage source shall be used to provide input voltage to the DUT. During the tests, the supply voltage and the frequency shall be maintained constant within  $\pm 0,5 \%$  during the warm-up period. However, during the actual measurement, the voltage shall be adjusted to within  $\pm 0,2 \%$  of the specified testing value.

### 4.3 Controllable controlgear

**In the case of controllable controlgear, the test shall be carried out with the maximum output power.**

Requirements for other than 100 % light output operation of controllable controlgear and multi-tapped electromagnetic controlgear are under consideration.

### 4.4 Multi-lamp type controlgear

If a single-lamp controlgear is designed for different lamp powers then the test shall be carried out for each lamp.

The test for multi-lamp controlgear shall be carried out with all possible combinations.

### 4.5 Measurement uncertainty

Measurement uncertainty shall be managed in accordance with the accuracy method in IEC Guide 115:2007, 4.4.3.

### 4.6 Sampling of controlgear for testing

~~Tests in this International Standard are type tests.~~ The requirements and tolerances specified in this document are based on the testing of a type test sample submitted by the manufacturer for that purpose. This sample should consist of units having characteristics typical of the manufacturer's production and be as close to the production centre point values as possible.

### 4.7 **Number Size of the test samples**

~~One specimen shall be tested.~~ **Tests are carried out with one test specimen.**

### 4.8 Power supply

Where the test voltage and frequency are not defined by national or regional requirements, the controlgear manufacturer shall declare the nominal voltage(s) at which the given efficiency is valid.

Test voltage(s) and test frequency(ies) shall be the nominal voltage and the nominal frequency of the country or region for which the measurement is being determined (refer to Table 1).

**Table 1 – Typical nominal electricity supply details for some regions**

Country or region	Nominal voltage and frequency <sup>a</sup>
Europe	230 V; 50 Hz
North America	120 V, 277 V; 60 Hz
Japan <sup>b</sup>	100 V, 200 V; 50/60 Hz
China	220 V; 50 Hz
Australia and New Zealand	230 V; 50 Hz
<sup>a</sup> Values are for single phase only. Some single phase supply voltages can be double the nominal voltage above (centre transformer tap). The voltage between two phases of a three-phase system is 1,73 times single phase values (e.g. 400 V for Europe).	
<sup>b</sup> 50 Hz is applicable for the Eastern part and 60 Hz for the Western part, <del>respectively.</del>	

#### 4.9 Supply voltage waveform

The total harmonic content of the supply voltage when supplying the DUT shall not exceed 3 %; harmonic content is defined as the root-mean-square (RMS) summation of the individual components using the fundamental as 100 %.

The ratio of peak value to RMS value of the test voltage (i.e. crest factor) shall be between 1,34 and 1,49.

#### 4.10 Instrument accuracy

For measurement uncertainty and traceability see ISO/IEC Guide 98-3 and IEC Guide 115.

For ~~magnetic wire wound~~ electromagnetic controlgear, calibrated and traceable AC power meters, power analysers or digital power meters shall be used.

For electronic controlgear, all output power measurements shall be made with a calibrated and traceable wideband power analyser or digital power meter.

For measurements made under the scope of this document, measurement instruments with the following minimum accuracies are to be used:

##### a) for frequencies $\leq 1$ kHz

- Voltage: 0,5 %
- Current: 0,5 %
- Power: 1,0 %
- Frequency: 0,1 %

##### b) for frequencies $> 1$ kHz

- Voltage: 1,5 %
- Current: 1,0 %
- Power: 2,0 %
- Frequency: 0,1 %

Stability of the measurement values (V, A or W) is given if the data does not ~~differ by~~ deviate from more than 1 % in a time frame of 15 min. If any of these values vary with time, the power is determined as the arithmetic mean value over a sufficient period.

#### 4.11 Multi-rated voltage controlgear

If a controlgear is designed for more than one rated voltage, the controlgear manufacturer shall declare the rated voltage(s) at which the given efficiency and standby power is valid.

#### 4.12 Sensor and network connections


For the measurement of all kinds of controlgear power (also standby) the power consumed by all circuits (internal or external) which are not involved in power conversion for the controlgear operation (e.g. communication devices, external sensors, auxiliary load, battery charging circuits) shall be excluded from the measurements. If the auxiliary cannot be disconnected, its effect shall be otherwise eliminated from the result.

NOTE Power consumed by circuits necessary for the proper operation of power conversion is considered in the measurement (e.g. cooling fan, signalling lighting).

### 5 Method of measurement of the input power and calculation of the efficiency of controlgear for high intensity discharge lamps

#### 5.1 Measurement setup: electromagnetic ~~wire-wound~~ controlgear

Figure 1 shows the measurement setup of the power losses of electromagnetic ~~wire-wound~~ controlgear.

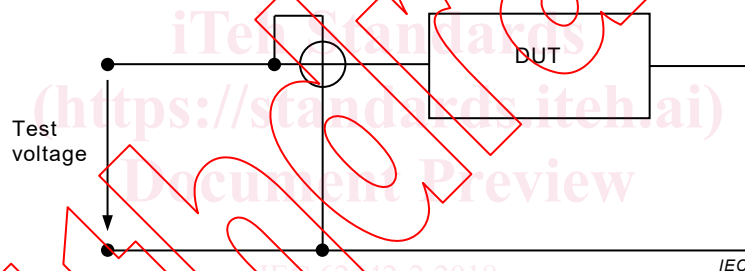

#### Key

DUT device under test

**Figure 1 – Measurement setup for electromagnetic controlgear**

The power losses ( $P_{\text{losses}}$ ) of the electromagnetic controlgear will be measured based on the rated lamp current through the electromagnetic controlgear. Therefore the current through the electromagnetic controlgear will be adjusted by the test voltage to the current defined in the data sheet of the lamp(s). Tolerance for the current is  $\pm 0,5\%$ .

The measurements are carried out with a power meter connected to measure the power losses into the electromagnetic controlgear.

The value of the power losses ( $P_{\text{losses}}$ ) is recorded when a steady state has been reached (temperature of the electromagnetic controlgear).

The measurement sequence is as follows:

- 1) Connect the DUT according to Figure 1.
- 2) Switch on the ~~supply test~~ voltage and adjust the ~~output test~~ voltage ~~of the transformer~~ until the rated lamp current is obtained.
- 3) Await the thermal equilibrium and if necessary adjust the ~~test~~ voltage ~~of the transformer~~ again to match the rated lamp current.
- 4) Measure the power losses.