

INTERNATIONAL STANDARD



**Fibre optic interconnecting devices and passive components – Basic test and measurement procedures –
Part 3-21: Examinations and measurements – Switching time**

Document Preview

[IEC 61300-3-21:2019](#)

<https://standards.iteh.ai/catalog/standards/iec/af11b64c-7b06-48a8-bfd2-6d1fe5de4f5b/iec-61300-3-21-2019>





THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2019 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

67 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

[IEC 61300-3-21:2019](https://standards.iteh.ai/catalog/standards/iec/af11b64c-7b06-48a8-bfd2-6d1fe5de4f5b/iec-61300-3-21-2019)

<https://standards.iteh.ai/catalog/standards/iec/af11b64c-7b06-48a8-bfd2-6d1fe5de4f5b/iec-61300-3-21-2019>



IEC 61300-3-21

Edition 3.0 2019-09
REDLINE VERSION

INTERNATIONAL STANDARD



**Fibre optic interconnecting devices and passive components – Basic test and measurement procedures –
Part 3-21: Examinations and measurements – Switching time**

Document Preview

[IEC 61300-3-21:2019](https://standards.iteh.ai/standards/iec/af11b64c-7b06-48a8-bfd2-6d1fe5de4f5b/iec-61300-3-21-2019)

<https://standards.iteh.ai/catalog/standards/iec/af11b64c-7b06-48a8-bfd2-6d1fe5de4f5b/iec-61300-3-21-2019>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 33.180.20

ISBN 978-2-8322-7436-1

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD	3
1 Scope	5
2 Normative references	5
3 Terms and definitions	5
4 Apparatus	7
4.1 General description	7
4.2 Optical source (S)	7
Excitation unit (E)	7
4.3 Detector (D)	7
4.4 Actuation energy supply (AS)	8
4.5 Data acquisition system (DAS)	8
4.6 Termination (T)	8
4.7 Temporary joint (TJ)	8
5 Procedure	8
6 Details to be specified	10
Bibliography	11
Figure 1 – Measurement set-up using a 2-channel oscilloscope as DAS to measure a single output port	9
Figure 2 – Example of a port moving to an on-state or off-state	9

iTeh Standards
(<https://standards.itih.ai>)
Document Preview

[IEC 61300-3-21:2019](#)

<https://standards.itih.ai/catalog/standards/iec/af11b64c-7b06-48a8-bfd2-6d1fe5de4f5b/iec-61300-3-21-2019>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS – BASIC TEST AND MEASUREMENT PROCEDURES –

Part 3-21: Examinations and measurements – Switching time

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This redline version of the official IEC Standard allows the user to identify the changes made to the previous edition. A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text.

International Standard IEC 61300-3-21 has been prepared by subcommittee 86B: Fibre optic interconnecting devices and passive components, of IEC technical committee 86: Fibre optics.

This third edition cancels and replaces the second edition published in 2014. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) changes to remove redundant overlap with IEC 60876-1;
- b) clarifications to definitions and diagrams;
- c) generalization of the detection apparatus beyond an oscilloscope.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
86B/4218/FDIS	86B/4230/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 61300 series, published under the general title, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS – BASIC TEST AND MEASUREMENT PROCEDURES –

Part 3-21: Examinations and measurements – Switching time

1 Scope

This part of IEC 61300 ~~is~~ describes a method to measure the switching time and related performance parameters of ~~an optical~~ a fibre optic spatial switch when the actuation energy is applied or removed to change the state of the switch.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

~~IEC 61300-1, Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 1: General and guidance~~

IEC 61300-3-4, Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-4: Examinations and measurements – Attenuation

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1

latency time

<switching from isolated state to conducting state> elapsed time until the output power of a specified output port reaches 10 % of its steady-state value ~~of the output power~~ from the time the actuation energy is applied for a ~~normally-on~~ normally-off switch or is removed for a ~~normally-off~~ normally-on switch

[SOURCE: IEC 60876-1:2012, 3.3.4.1, modified – “for a normally-on switch or is removed for a normally-off switch” has been added.]

3.2

latency time

<switching from conducting state to isolated state> elapsed time until the output power of a specified output port reaches 90 % of its steady-state value ~~of the output power~~ from the time the actuation energy is removed for a ~~normally-on~~ normally-off switch or is applied for a ~~normally-off~~ normally-on switch

Note 1 to entry: For a latch type optical switch, when switching from conducting state to isolated state, actuation energy is applied or removed.

~~[SOURCE: IEC 60876-1:2012, 3.3.4.2, modified – “for a normally on switch or is removed for a normally off switch” and Note 1 to entry have been added.]~~

**3.3
rise time**

elapsed time for the output power of the specified output port to rise from 10 % of the steady-state conducting value to 90 % of the steady-state conducting value

~~[SOURCE: IEC 60876-1:2012, 3.3.5, modified – “conducting” has been added.]~~

**3.4
fall time**

elapsed time for the output power of the specified output port to fall from 90 % of the steady-state conducting value to 10 % of the steady-state conducting value

~~[SOURCE: IEC 60876-1:2012, 3.3.6, modified – “conducting” has been added.]~~

**3.5
bounce time**

<switching from isolated state to conducting state> elapsed time until the output power of a specified output port is maintained between 90 % and 110 % of its steady-state value ~~of the output power~~ from the first time the output power of a specified output port reaches 90 % of its steady-state value of the output power

~~[SOURCE: IEC 60876-1:2012, 3.3.7.1]~~

**3.6
bounce time**

<switching from conducting state to isolated state> ~~elapsed~~ time until the output power of a specified output port is maintained between 0 % and 10 % of its steady-state conducting value ~~of the output power~~ from the first time the output power of a specified output port reaches 10 % of its steady-state conducting value of the output power

~~[SOURCE: IEC 60876-1:2012, 3.3.7.2]~~

**3.7
switching time**

<switching from isolated state to conducting state>

t_s

$$t_s = t_l + t_r + t_b$$

where

t_l is the latency time;

t_r is the rise time;

t_b is the bounce time

~~[SOURCE: IEC 60876-1:2012, 3.3.8.1]~~

3.8 switching time

<switching from conducting state to isolated state>

t_s'

$$t_s' = t_l' + t_f + t_b'$$

where

t_l' is the latency time;

t_f is the fall time;

t_b' is the bounce time

[SOURCE: IEC 60876-1:2012, 3.3.8.2]

4 Apparatus

4.1 General description

For each optical path through the switch that is to be tested, a stable optical signal from an optical source is applied to the input port(s), and the time-dependent optical signal level at the output port(s) is measured with respect to the time when the actuation energy specified in the relevant specification is applied or removed.

4.2 Optical source (S)

The source output power shall be sufficiently stable over the time required to perform the measurements. Unless otherwise specified, the optical power stability shall follow IEC 61300-3-4. The source shall be capable of producing the spectral characteristics (both wavelength and spectral width) defined in the relevant specification. The output power required shall consider the power range of the detection system and the loss of the device under test (DUT).

In the case that the optical source is polarized, as is usual for laser sources, then the measurement and especially the steady-state conducting value of the output power will be influenced by any polarization dependence in the switch, joints, or detector. Stable environmental conditions and fibre positioning are recommended to avoid changes in the polarization state during the measurement.

~~4.3 Excitation unit (E)~~

~~This is a special launch fibre or imaging system designed to achieve the required launch conditions. The excitation unit shall follow IEC 61300-1.~~

4.3 Detector (D)

The detector produces an electrical signal proportional to the input optical power. The detector shall have sufficient ~~speed~~ fast response time to measure the switching time and bounce time to the accuracy specified in the relevant specification. The response time of the detector should be less than or equal to one tenth the rise time or fall time to be measured. The detector shall have sufficient large dynamic range to make the measurement and have linear response of < 0,05 dB over the optical power levels expected to be encountered. The detector shall have sufficiently high return loss to prevent impact on the measurements. The return loss of the measurement system should be 30 dB or higher. Multiple detectors may be used to measure multiple optical ports simultaneously.

4.4 Actuation energy supply (AS)

The rise time and fall time of the actuation energy supply should be less than or equal to one tenth the rise time or fall time of the optical switch specification. The duration of the actuation energy shall be sufficiently longer than the anticipated bounce time, for non-latch type optical switches.

4.5 Data acquisition system (DAS)

The data acquisition system records the time-dependence of the optical power, ~~referred to from~~ the time that the actuation energy is applied or removed. It shall have sufficient large data storage capacity, bandwidth and accuracy and shall have the capability ~~for~~ of at least two traces, or one trace that is synchronized by a hardware or software trigger to the actuation energy. An oscilloscope may be used for data acquisition or the detector, and data acquisition functions may be integrated in a data-logging optical power meter.

4.6 Termination (T)

These terminations are components or techniques to suppress reflected light from the **device under test (DUT)** output ports. Impairment of the measurement by reflections at the fibre output to the detector(s) should also be avoided. Fibre optic connectors with angled polished contacting ~~(APC)~~ face are usually sufficient to achieve > 60 dB return loss. If the switch under test has non-angled-polished connectors, they can be terminated by connecting to a cord with a non-angled-polished connector and an angled-polished connector at the other end.

4.7 Temporary joint (TJ)

A method, device, or mechanical fixture for temporarily aligning two fibre ends into a reproducible, low loss joint. It ~~may~~ can be, for example, a precision V-groove vacuum chuck, micro-manipulator, or a fusion or mechanical splice. The attenuation and return loss stability of the temporary joint shall be compatible with the measurement precision required.


5 Procedure

IEC 61300-3-21:2019

<https://standards.iech.ai/catalog/standards/iec/af11b64e-7b06-48a8-bfd2-6d1fe5de4f5b/iec-61300-3-21-2019>

The procedure is illustrated here for a switch containing ~~integral~~ fibre optic pigtailed without connectors (configuration A switch, see IEC 60876-1). For switches configured with fibre optic connectors ~~on the pigtailed or housing~~ plugs or receptacles (configurations B or C), the appropriate fibre ~~cords and connectors~~ optic patchcords or adaptors shall be used in the place of the temporary joints. When multiple output ports are measured, each may be connected to a detector and it should be assured that impairment from reflections is avoided.

- a) Configure the switching time and bounce time measurement set-up as shown in Figure 1. Connect the detector output to channel 1 of the data acquisition system. Additional detectors may be used in the same way. Connect the actuation energy supply to the optical switch and to channel 2 or the trigger input of the data acquisition system, as shown in Figure 1.
- b) When the actuation energy specified in the relevant specification is supplied or removed, record the change in the optical power level over enough time to establish the steady-state optical power level. ~~Using the 10 % and 90 % power levels, determine the switching time t_s , rise time t_r or fall time t_f , and bounce time t_b , as shown in Figure 2.~~ Using the 0 %, 10 % and 90 % power levels, determine the latency time t_l , the rise time t_r or fall time t_f , the bounce time t_b , and the switching time t_s as shown in Figure 2. In the case in which, for any reason, the steady-state power of the isolated state is not zero, the power levels should be normalized by subtracting from them the steady-state power of the isolated state, before determining the switching time parameters.

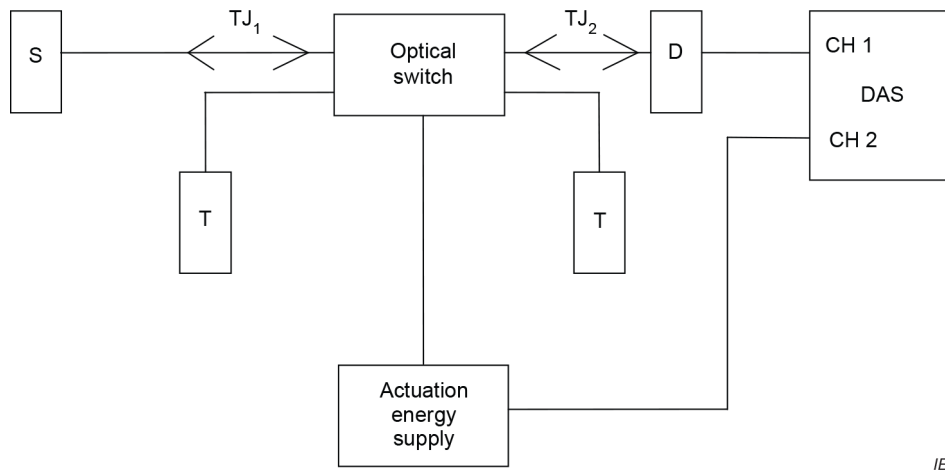


IEC

Key

- S optical source
- TJ temporary joint
- T termination
- D detector
- T termination
- DAS data acquisition system

Figure 1 – Measurement set-up using a 2-channel oscilloscope as DAS to measure a single output port

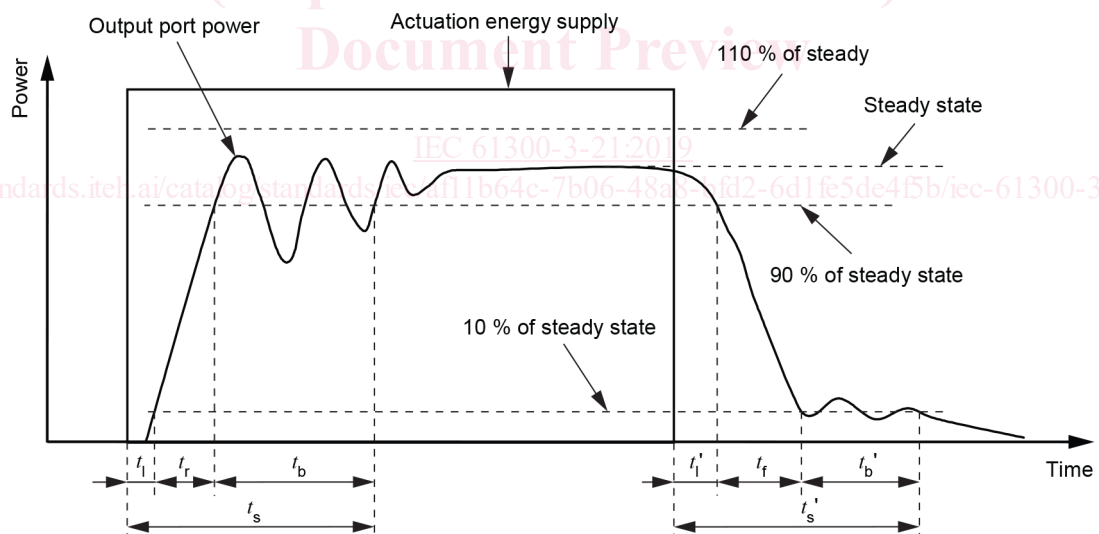

IEC

Key

- t_s, t_s' switching time
- t_l, t_l' latency time
- t_r rise time
- t_f fall time
- t_b, t_b' bounce time

NOTE Figure 2 is valid for normally-off configuration. For a normally-on example, refer to IEC 60876-1:2014.

Figure 2 – Example of a port moving to an on-state or off-state