



SLOVENSKI STANDARD
SIST ETS 300 133-4 E2:2003
01-december-2003

9`Y_hfca U[bYfbUnXfi y`^j cgh]b`nUXYj Yj `nj Yn]`n`fUX]`g_`ja `gdY_hfca `fØFAŁĚ
=nVc`^yUb]`g]ghYa `nUfUX]`g_c`gdcfc Ub`Y`fØFA9GŁĚ(`XY.`GdYWZ_UM`UfUX]`g_Y[U
j a Ygb]_U

ElectroMagnetic Compatibility and Radio Spectrum Matters (ERM); Enhanced Radio
Messaging System (ERMES); Part 4: Air interface specification

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 133-4 E2:2003](https://standards.iteh.ai/catalog/standards/sist/122a71d7-fc03-432a-96d8-000427185db/sist-ets-300-133-4-e2-2003)

Ta slovenski standard je istoveten z: <https://standards.iteh.ai/catalog/standards/sist/122a71d7-fc03-432a-96d8-000427185db/sist-ets-300-133-4-e2-2003> **ETS 300 133-4 Edition 2**

ICS:

33.070.20	Sistem za osebni klic	Paging systems
33.100.01	Elektromagnetna združljivost na splošno	Electromagnetic compatibility in general

SIST ETS 300 133-4 E2:2003

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 133-4 E2:2003](https://standards.iteh.ai/catalog/standards/sist/122a71d7-fc03-432a-96d8-06b427ff83db/sist-ets-300-133-4-e2-2003)

<https://standards.iteh.ai/catalog/standards/sist/122a71d7-fc03-432a-96d8-06b427ff83db/sist-ets-300-133-4-e2-2003>



EUROPEAN
TELECOMMUNICATION
STANDARD

ETS 300 133-4

November 1997

Second Edition

Source: ERM

Reference: RE/ERM-RP04-007-4

ICS: 33.020

Key words: Air interface, ERMES, paging, radio

**Electromagnetic compatibility
and Radio spectrum Matters (ERM);
Enhanced Radio MESSage System (ERMES);
Part 4: Air interface specification**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 4 92 94 42 00 - Fax: +33 4 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1997. All rights reserved.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 133-4 E2:2003](https://standards.iteh.ai/catalog/standards/sist/122a71d7-fc03-432a-96d8-06b427ff83db/sist-ets-300-133-4-e2-2003)

<https://standards.iteh.ai/catalog/standards/sist/122a71d7-fc03-432a-96d8-06b427ff83db/sist-ets-300-133-4-e2-2003>

Contents

Foreword	5
Intellectual Property Rights	6
1 Scope	7
2 Normative references	7
3 Definitions, abbreviations and symbols	7
3.1 Definitions	7
3.2 Abbreviations	9
3.3 Symbols	10
4 Transmission protocol	10
4.1 General description of the protocol	10
4.2 Outline of the air interface model	12
4.2.1 Information format L4	12
4.2.2 Error correction coding L3	12
4.2.3 Codeword interleaving L2	12
4.2.4 Modulation L1	12
4.3 Application of the model to the air interface	12
4.4 Batch structure	12
4.5 Subsequence lengths	14
4.6 Version compatibility	14
4.6.1 Compatibility mechanism	14
4.6.2 Earlier versions	14
4.6.3 Compatibility matrix	14
5 Information format	14
5.1 General	14
5.2 Synchronization partition	15
5.3 System information partition	15
5.3.1 System information	15
5.3.1.1 Format of the network information	15
5.3.1.2 Format of the time slot information	16
5.3.2 Supplementary system information	16
5.3.2.1 Transmission of different SSIT values on a channel	16
5.3.2.2 Supplementary system information field (SSIT = 0000)	17
5.3.2.3 Supplementary system information field (SSIT = 0001)	17
5.3.2.4 Supplementary system information field (SSIT = 0010)	17
5.3.2.5 Supplementary system information field (SSIT = 1101)	18
5.3.2.6 Supplementary system information field (SSIT = 1110)	18
5.3.2.7 Supplementary system information field (SSIT = 1111)	18
5.4 Address partition	18
5.5 Message partition	18
5.5.1 Message header	18
5.5.1.1 Variable Information Field (VIF) (All = 0)	19
5.5.1.2 Variable Information Field (VIF) (All = 1)	19
5.5.1.2.1 Long messages (All = 1, AIT = 000, 001, 101 or 110)	20
5.5.1.2.2 Remote programming of pager parameters (All = 1, AIT = 010)	21
5.5.1.2.3 Miscellaneous (All = 1, AIT = 100)	22
5.5.1.2.4 Common temporary address pointers (All = 1, AIT = 111)	22
5.5.2 Additional information and external operator identity	22
5.5.3 Message data	22

	5.5.4	Message data	22
	5.5.5	Message delimiter.....	23
	5.5.6	Completion of message codeblocks.....	23
	5.5.7	Unused codeblocks	23
6		Error correction coding	24
7		Codeword interleaving	25
8		Modulation	25
	8.1	General.....	25
	8.2	RF channels and channel numbering	25
	8.3	Modulation format	26
	8.3.1	Symbol alphabet	26
	8.3.2	Data rate and symbol rate	26
	8.3.3	Premodulation pulse shaping	27
	8.3.4	Paging receiver performance	28
	8.3.5	Transmitter performance	28
9		Operation of the radio subsystem.....	28
	9.1	General.....	28
	9.2	Frequency subset indicator and frequency subset number	29
	9.3	Border area indicator.....	30
	9.4	External traffic indicator.....	30
	9.5	Examples of receiver operation.....	30
	9.5.1	Non-locking receivers	30
	9.5.2	Locking receiver.....	31
10		Paging message procedures on the air interface.....	31
	10.1	General.....	31
	10.2	Individual call procedure.....	31
	10.3	Group call procedure.....	32
	10.4	Handling of long messages.....	33
	10.5	Messages continued in further batches in the same subsequence.....	34
	10.6	Messages continued in further subsequences.....	34
	10.7	Transmission of variable receiver parameters	34
	10.8	Termination of message search.....	34
	10.8.1	Individual calls.....	34
	10.8.2	Group calls.....	35
11		Battery saving techniques.....	35
	11.1	Batch level.....	35
	11.2	Subsequence level	35
	11.3	Cycle level	35
	11.4	Sequence level.....	36
12		Synchronization	36
	12.1	General.....	36
	12.2	Synchronization between paging receiver and radio transmission	36
	12.3	Synchronization between base stations	37
	12.4	Co-ordination between networks.....	37
		History.....	38

Foreword

This second edition European Telecommunication Standard (ETS) has been produced by the Electromagnetic compatibility and Radio spectrum Matters (ERM) Technical Committee of the European Telecommunications Standards Institute (ETSI).

This ETS comprises seven parts with the generic title "Electromagnetic compatibility and Radio spectrum Matters (ERM); Enhanced Radio MESSage System (ERMES)". The title of each part is listed below:

Part 1: "General aspects";

Part 2: "Service aspects";

Part 3: "Network aspects";

Part 4: "Air interface specification";

Part 5: "Receiver conformance specification";

Part 6: "Base station specification";

Part 7: "Operation and maintenance aspects".

This part, ETS 300 133-4, specifies the radio subsystem aspects including:

- the transmission protocol and its operation;
- modulation characteristics;
- channel coding;
- quasi-synchronous operation;
- receiver battery saving techniques.

NOTE: In this part of ETS 300 133, some protocol bits have been "reserved for future definition". It is intended that these bits will be allocated for specific options in a future enhanced version of this ETS.

Suggestions for potential enhancements to the protocol using these bits should be communicated via the normal ETS maintenance procedures to the ETSI Secretariat at the address given on the title page.

Transposition dates	
Date of adoption:	7 November 1997
Date of latest announcement of this ETS (doa):	28 February 1998
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	31 August 1998
Date of withdrawal of any conflicting National Standard (dow):	31 August 1998

Intellectual Property Rights

IPRs essential or potentially essential to this ETS may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETR 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available **free of charge** from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.fr/ipr>).

Pursuant to the ETSI Interim IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETR 314 (or the updates on <http://www.etsi.fr/ipr>) which are, or may be, or may become, essential to this ETS.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 133-4 E2:2003](https://standards.iteh.ai/catalog/standards/sist/122a71d7-fc03-432a-96d8-06b427ff83db/sist-ets-300-133-4-e2-2003)

<https://standards.iteh.ai/catalog/standards/sist/122a71d7-fc03-432a-96d8-06b427ff83db/sist-ets-300-133-4-e2-2003>

1 Scope

This European Telecommunication Standard (ETS), describes the requirements for air interface specification of the Electromagnetic compatibility and Radio spectrum Matters (ERM) Enhanced Radio MESSage System (ERMES). All aspects of the radio subsystem are defined including the transmission protocol, information format, channel coding and modulation characteristics. Operation of the radio subsystem and procedures on the air interface are defined and described.

2 Normative references

This ETS incorporates by dated or undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references subsequent amendments to, or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] ETS 300 133-2 (1997): "Radio Equipment and Systems (RES); Enhanced Radio MESSage System (ERMES) Part 2: Service aspects".
- [2] ETS 300 133-5: (1997): "Radio Equipment and Systems (RES); Enhanced Radio MESSage System (ERMES) Part 5: Receiver conformance specification".
- [3] ETS 300 133-6: (1997): "Radio Equipment and Systems (RES); Enhanced Radio MESSage System (ERMES) Part 6: Base station conformance specification".
- [4] ITU-T Recommendation E.212: "Identification plan for land mobile stations".
- [5] CEPT Recommendation T/R 25-07: "Frequency co-ordination for the Enhanced Radio MESSage system (ERMES)".
- [6] ETS 300 133-1: "Electromagnetic compatibility and Radio spectrum Matters (ERM); Enhanced Radio MESSage System (ERMES); Part 1: General aspects".

3 Definitions, abbreviations and symbols

3.1 Definitions

For the purposes of this ETS, the following definitions apply:

associated operator: One of the network operators with which the home operator has an agreement to exclusively transfer calls.

basic Radio Identity Code (RIC): The prime identity of a paging receiver allocated by the network operator when service is initiated. It can not be changed without safeguards against unauthorized changes.

batch number: The 4 bit number corresponding to a particular batch type. Batch type A corresponds to batch number 0000. Batch type P corresponds to batch number 1111.

batch type: The letter (A to P) which identifies one of the 16 batches within a subsequence.

character set indicator: Indicates which additional character set is to be used. The basic set defined in ETS 300 133-2 [1], table B.3, is 00000.

codeblock: Nine codewords interleaved as a unit as used in the message partition.

codeword: The standard information unit of 30 bits length.

country code: Binary representation of the country number defined in ITU-T Recommendation E.212 [4], annex A. The country code consists of 7 bits (see subclause 5.3.1.1).

End Of Message (EOM) character: A specific character used to indicate the end of an alphanumeric message. It corresponds to DC1 as defined in clause B.3 of ETS 300 133-2 [1].

external receiver: A receiver operating in a network which is not its home network.

frequency divided network: A network that uses different frequency channels in adjacent paging areas.

geographical area: One or several paging areas in an operator network. Defined by agreements between network operators for inter-network roaming or by a single operator for roaming within his own network. It is used for roaming and choice of destination supplementary services.

home network: The operator network with which a mobile subscriber has signed a subscription.

home operator: The network operator to which a specific user has subscribed.

initial address: The 18 most significant bits of the local address.

I1 interface: The radio interface between the base stations and the paging receivers.

I1 version number: The version number of the I1 interface. It consists of the Main Version Number (MVR1) and the Sub Version Number (SVR1) and is defined in ETS 300 133-1, annex B [6].

I2 interface: An interface between the Paging Area Controller and the Base Station (BS).

local address: The number used by a network to identify the receivers subscribed to it. It consists of 22 bits. The four least significant bits of the local address denote the batch number of the receiver.

long message: A message that has been split into two or more parts (sub-messages) for transmission.

operator code: The number used by the system on the radio path to identify an operator within a country. It consists of 3 bits.

operator identity: The number used by the system on the radio path to identify the home operator of a receiver. It has a total length of 13 bits and consists of three parts, the zone code, the country code and the operator code.

paging area: The area controlled by a Paging Area Controller (PAC). It is the minimum area to which a mobile subscriber is permitted to subscribe in order to receive his paging messages.

paging area code: The number used by the system to identify the paging area.

paging area controller: Functional entity controlling the base stations within one paging area.

paging message: The tone-only, numeric, alpha-numeric or transparent data information sent to a paging receiver.

paging signal: The signal sent on the radio path to a paging receiver.

radio identity code: The number used by the system on the radio path to identify the receiver(s) for which the paging message is intended. The RIC has a total length of 35 bits and consists of five parts: the zone code (3 bits), the country code (7 bits), the operator code (3 bits), the initial address (18 bits) and the batch number (4 bits).

	Operator Identity			Local Address	
	Zone code	Country code	Operator Code	Initial address	Batch number
No. of bits	3	7	3	18	4

Figure 1: Radio identity code

reserved for future definition: The bits indicated are not specified in this edition of the standard but may be in future editions. The bits should be set to a default value of zero and not used to convey information. The function of any equipment is independent of these bits. No fixed pattern of reserved bits should be assumed and no combination of reserved bits should cause equipment to malfunction.

roaming area: The geographical area where the mobile subscriber asks for his messages to be transmitted when he uses the roaming service.

service area: The paging area(s) to which the mobile subscriber has subscribed and in which a paging message will normally be transmitted.

sub-message: Part of a long message. All sub-messages of any one long message carry the same message number.

symbol: Two bits of information which are the basic unit of information on the air interface. It corresponds to one of the four modulation levels specified in subclause 8.3.1.

time divided network: A network that uses the same frequency channel during different sub-sequences (periods of a time cycle) in adjacent paging areas.

zone code: Binary representation of the zone number defined in ITU-T Recommendation E.212 [4], annex A. The zone code consists of 3 bits (see subclause 5.3.1.1).

3.2 Abbreviations

For the purposes of this ETS, the following abbreviations apply:

All	Additional Information Indicator
AIF	Additional Information Field
AIN	Additional Information Number
AIT	Additional Information Type
APT	Address Partition Terminator
BAI	Border Area Indicator
BS	Base Station
CTA	Common Temporary Address
CTAP	Common Temporary Address Pointer
EB	External Bit
ETI	External Traffic Indicator
FSI	Frequency Subset Indicator
FSN	Frequency Subset Number
IA	Initial Address
IVR1	I1 version number
LSB	Least Significant Bit
MSB	Most Significant Bit
MVR1	I1 main version number
OPID	Operator Identity
PA	Paging Area
PR	Preamble
PAC	Paging Area Controller
PAM/FM	Pulse Amplitude Modulated Frequency Modulation
RF	Radio Frequency
RIC	Radio Identity Code
RSVD	Reserved bits for future definition
SI	System Information
SM	Subsequence Mask
SSI	Supplementary System Information
SSIF	Supplementary System Information Field
SSIT	Supplementary System Information Type
SSN	Subsequence Number
SVR1	I1 sub version number
SW	Synchronization Word
SYN	Synchronization Word
SYS	System information partition

UMI	Urgent Message Indicator
UTC	Universal Time Co-ordinated
VIF	Variable Information Field

3.3 Symbols

For the purposes of this ETS, the following symbols apply:

ENL	Number of Least Significant Bits (LSB) to be compared when operating outside home network
HNL	Number of LSBs to be compared when operating within home network

4 Transmission protocol

4.1 General description of the protocol

This ETS describes the version 02.01 of the air interface specification (I1).

The structure of the basic transmission protocol on channel one (of channels numbered 1 - 16) is illustrated in figure 2.

A sequence of 60 minutes total duration and comprising 60 cycles shall be provided. Sequences shall be co-ordinated with the Universal Time Co-ordinated (UTC) so that on the hour a new sequence commences.

A paging cycle of exactly one minute duration, co-ordinated with UTC, shall be used to allow the necessary co-ordination between different networks. Receivers may listen to one or a few cycles in a sequence in order to reduce battery consumption (see clause 11).

Each cycle shall be divided into five subsequences commencing at 12 second intervals. To allow co-ordination between networks the Subsequence Number (SSN) = 0 subsequence shall always be transmitted first after the UTC minute marker.

The transmission of a subsequence may end before the full 12 seconds has elapsed. The subsequence length may be reduced by a small amount to allow for transmitter switching times. Occasionally a greater reduction may be made in order that test or system transmissions can be made by individual transmitters.

Each subsequence shall be further divided into 16 batches labelled A-P. The receiver population should be divided into 16 groups and each receiver allocated to one of the 16 batch types according to the 4 least significant bits of its basic RIC. Further RICs used by this receiver shall be of the same batch type.

Each receiver shall only be initially addressed in its own batch type transmission. When the receiver detects its initial address it should wait on the same channel for the message to be sent. The message may be sent in the same batch, in any subsequent batch of the same subsequence or in the following subsequence (see subclause 10.6 regarding time-out conditions).

An initial address may be transmitted more than once in the same batch (see subclause 10.2).

The time of transmission of a particular batch type on each frequency channel is shifted by a single time batch with respect to the others as shown in figure 3. Consequently a receiver can, if necessary, step through the paging frequency channels without losing any messages.

The first fifteen batches in every subsequence shall have length 154 codewords. The final batch in every subsequence shall have length 190 codewords. This is so that messages in time divided networks may be completed within a subsequence.

Each batch is further subdivided into four partitions. These are the synchronization, system information, address and message partitions. A detailed description of the batch structure is given in subclause 4.4 and the contents of each partition specified in subclauses 5.2 to 5.5.

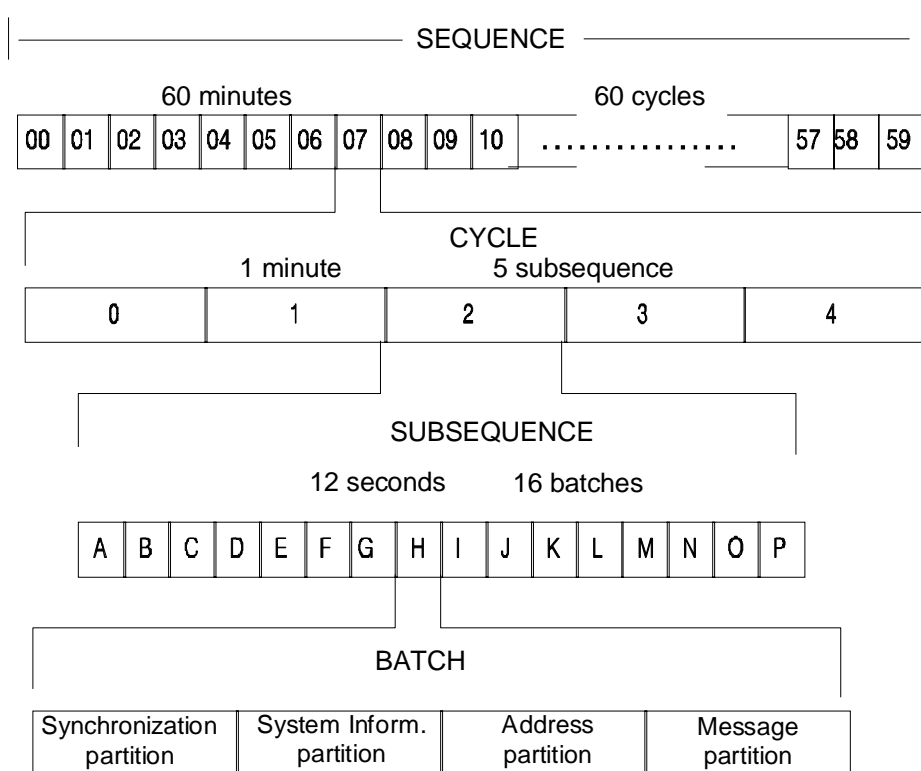


Figure 2: Structure of the radio protocol on channel one
iTeh STANDARD PREVIEW
(standards.iteh.ai)

■ = Active batch for a type A receiver

Chan	12 seconds																											
01	■	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	■	B	C	D	E	F	G	H	I	J	K	L
03	P	■	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	■	B	C	D	E	F	G	H	I	J	K
05	O	P	■	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	■	B	C	D	E	F	G	H	I	J
07	N	O	P	■	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	■	B	C	D	E	F	G	H	I
09	M	N	O	P	■	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	■	B	C	D	E	F	G	H
11	L	M	N	O	P	■	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	■	B	C	D	E	F	G
13	K	L	M	N	O	P	■	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	■	B	C	D	E	F
15	J	K	L	M	N	O	P	■	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	■	B	C	D	E
16	I	J	K	L	M	N	O	P	■	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	■	B	C	D
14	H	I	J	K	L	M	N	O	P	■	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	■	B	C
12	G	H	I	J	K	L	M	N	O	P	■	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	■	B
10	F	G	H	I	J	K	L	M	N	O	P	■	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	■
08	E	F	G	H	I	J	K	L	M	N	O	P	■	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
06	D	E	F	G	H	I	J	K	L	M	N	O	P	■	B	C	D	E	F	G	H	I	J	K	L	M	N	O
04	C	D	E	F	G	H	I	J	K	L	M	N	O	P	■	B	C	D	E	F	G	H	I	J	K	L	M	N
02	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	■	B	C	D	E	F	G	H	I	J	K	L	M

NOTE: The relation between Radio Frequency (RF) channel frequencies and channel numbers is defined in subclause 8.2.

Figure 3: Channel synchronization and the scanning procedure