

---

---

**Building automation and control systems  
(BACS) —**

Part 1:  
**Project specification and implementation**

*Systèmes d'automatisation et de gestion technique du bâtiment —*

*Partie 1: Spécification et mise en œuvre d'un projet*

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

ISO 16484-1:2010

<https://standards.iteh.ai/catalog/standards/sist/06aacb5b-16af-4fde-9810-02cd0e9e5d36/iso-16484-1-2010>



**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO 16484-1:2010](https://standards.iteh.ai/catalog/standards/sist/06aacb5b-16af-4fde-9810-02cd0e9e5d36/iso-16484-1-2010)

<https://standards.iteh.ai/catalog/standards/sist/06aacb5b-16af-4fde-9810-02cd0e9e5d36/iso-16484-1-2010>



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2010

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

**Contents**

Page

Foreword .....	iv
Introduction.....	v
1 Scope .....	1
2 Normative references .....	1
3 Terms and definitions .....	2
4 Abbreviated terms .....	3
5 Requirements and recommendations .....	4
5.1 Overview.....	4
5.2 Design phase .....	7
5.3 Engineering phase .....	13
5.4 Installation phase .....	17
5.5 Completion phase .....	20
5.6 Documentation .....	21
5.7 Training.....	23
6 Review and improvement of building performance.....	23
Bibliography.....	24

ITCI STANDARD PREVIEW  
(standards.iteh.ai)

[ISO 16484-1:2010](https://standards.iteh.ai/catalog/standards/sist/06aacb5b-16af-4fde-9810-02cd0e9e5d36/iso-16484-1-2010)

<https://standards.iteh.ai/catalog/standards/sist/06aacb5b-16af-4fde-9810-02cd0e9e5d36/iso-16484-1-2010>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 16484-1 was prepared by the European Committee for Standardization (CEN) Technical Committee CEN/TC 247, *Building automation, controls and building management*, in collaboration with ISO Technical Committee ISO/TC 205, *Building environment design*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

ISO 16484 consists of the following parts, under the general title *Building automation and control systems (BACS)*:

- *Part 1: Project specification and implementation*
- *Part 2: Hardware*
- *Part 3: Functions*
- *Part 5: Data communication protocol*
- *Part 6: Data communication conformance testing*

The following part is under preparation:

- *Part 4: Applications*

## Introduction

ISO 16484 (all parts) is aimed at the design of new buildings and the retrofitting of existing buildings for an acceptable indoor environment, practical energy conservation, and efficiency.

ISO 16484 (all parts) is applicable to building automation and control systems (BACS), as follows:

- The environmental design for all building types requires complex methods of automation and control. The functional integration of services other than heating, ventilating and air conditioning (HVAC) is a general task for all parties employed to develop an integrated multi-application system. The integration comprises, for example, lighting and electric power distribution control, security control, transportation, maintenance management or facilities management. This system integration allows the user to take advantage of synergies between the different applications. ISO 16484 (all parts) gives guidance to architects, consultants and contractors as well as guidance to users on how to share such resources.
- The innovation cycles between devices, systems and networks vary. In order to make it possible to add and to change existing devices and extend the building automation and control network, several interfaces, both proprietary and standardized, are defined between the BACS network and the other systems. A manufacturer can design a product, both to meet his specific marketing objectives and to give the option to integrate that special device into a multi-application BACS. Interfaces are also defined in appropriate parts of ISO 16484 along with the necessary communications protocol and conformance test required to support the interworking of devices.
- A manufacturer, a systems house, or an electrical or mechanical contractor can assemble the implementation of a building automation and control system.
- The application of ISO 16484 (all parts) is not to standardize the hardware and software design or the architecture of a system, but to define the process for the creation of project specifications, where the functionality and the quality of the solution are clearly defined.

ISO 16484 (all parts) is intended for use by those involved in the design, manufacture, engineering, installation, commissioning, operational maintenance and training of BACS when contracted, i.e.:

- as a guide to the terminology of the building automation and control trade. Unambiguous terminology is required for a complete and accurate conveyance of the intent and details of ISO 16484 (all parts);
- in product development, to avoid unnecessary duplication of function or terminology, but not necessarily placing a restraint on the evolution of new products, systems or applications;
- as a basis for interfacing products and systems. In order to interoperate, the elements of a BACS require a unified data communication protocol and information model;
- as a basis for drawing up a project specification for procurement;
- as a code of practice for expert commissioning;
- by educational establishments wishing to train people in the field of BACS.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO 16484-1:2010

<https://standards.iteh.ai/catalog/standards/sist/06aacb5b-16af-4fde-9810-02cd0e9e5d36/iso-16484-1-2010>

# Building automation and control systems (BACS) —

## Part 1: Project specification and implementation

### 1 Scope

This International Standard specifies guiding principles for project design and implementation and for the integration of other systems into the building automation and control systems (BACS).

This International Standard specifies the phases required for the BACS project, including:

- design (determination of project requirements and production of design documents including technical specifications),
- engineering (detailed function and hardware design),
- installation (installing and commissioning of the BACS); and
- completion (handover, acceptance and project finalization).

This International Standard also specifies the requirements for as-built documentation and training.

This International Standard is not applicable to operation and maintenance, nor is it applicable to retro or continuous commissioning, including a commissioning authority.

### 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 16484-2:2004, *Building automation and control systems (BACS) — Part 2: Hardware*

ISO 16484-3, *Building automation and control systems (BACS) — Part 3: Functions*

ISO 16484-5, *Building automation and control systems — Part 5: Data communication protocol*

ISO 16484-6, *Building automation and control systems (BACS) — Part 6: Data communication conformance testing*

IEC 62305-4, *Protection against lightning — Part 4: Electrical and electronic systems within structures*

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 16484-2, ISO 16484-5, ISO 16484-6 and the following apply.

#### 3.1

##### **acceptance**

decision and act of signing the handover document during the completion phase

NOTE The transfer of the responsibility for the system(s) from the supplier to the customer or their representative can be a legal act.

#### 3.2

##### **building performance**

set of measurable building characteristics

NOTE 1 This includes energy efficiency, indoor air quality, moisture management and thermal comfort.

NOTE 2 This is also influenced by building construction and utilization, installed technical services and their operation.

#### 3.3

##### **building services**

BS

utilities and installations supplied and distributed within a building

EXAMPLES Electricity, gas, heating, water and communications.

[Adapted from ISO 16484-2:2004, 3.33]

#### 3.4

##### **BACS commissioning**

project and system-specific process of calibrating field devices, testing data points, adjusting parameters, verifying sequences of operation and other functionalities for the various elements of a BACS application

NOTE 1 The BACS commissioning is a part of the engineering services, according to ISO 16484-2:2004, 3.71 and includes commissioning activities at the installation phase.

NOTE 2 Commissioning reports are proof of the completeness of tasks and work.

NOTE 3 There are country variations in the naming of the term “commissioning” and variations in the tasks covered by this term.

#### 3.5

##### **commissioning process**

systematic application of processes and procedures designed to ensure that the project objectives are achieved and maintained throughout the building lifetime

NOTE 1 The commissioning process begins at project conception and continues through to the pre-design, design, construction, start-up, turnover and occupancy to the operation phase.

NOTE 2 Details of how to conduct the commissioning process are outside the scope of this International Standard.

#### 3.6

##### **commissioning authority**

CxA

entity identified by the owner who leads, plans, schedules, and coordinates the commissioning team to implement the commissioning process

NOTE In some countries there are “certified commissioning authorities”.



**3.7****completion**

project phase where, when handover and finalization are achieved, the implementation of the BACS project can be considered as completed

**3.8****engineering**

acquiring and applying technical knowledge to design and implement devices, systems and processes that realize the desired objective

NOTE This includes project and system-specific services for planning, configuring and commissioning of the various parts of a BACS.

**3.9****finalization**

task during the project completion phase where the supplier resolves outstanding items

**3.10****functional description**

overall description that explains how each part of the system/plant is expected to operate, interact and be interacted with

NOTE The description covers material energy and signal flow of a plant or a system. Functions/operations are described as: storing, transmitting, converting, transforming and interlinking.

**3.11****handover**

formal process that transfers a system or part of a system usage from the supplier to the customer or their representative

NOTE The transfer of the operational responsibility for the system from the supplier to the customer can be a legal act or be agreed by contract.

**3.12****installation instruction**

document that explains how to install a technical device

NOTE 1 There can be several installation instructions for a device, e.g. mechanical, electrical.

NOTE 2 Installation instructions can be found from many sources, e.g. directives, standards, guidelines, professional recommendations, manufacturer's instructions for products.

**3.13****migrate**, verb

modernize the implemented software or the hardware under extensive utilization of the present infrastructure

**3.14****system integration**

bringing together subsystems into one system to function together as a system

**4 Abbreviated terms**

For the purposes of this document, the symbols, abbreviations and acronyms given in ISO 16484-2, ISO 16484-5, ISO 16484-6 and the following apply.

BACS Building automation and control system

CxA Commissioning authority

EMC	Electromagnetic compatibility
EMP	Electromagnetic pulse
HVAC	Heating, ventilating and air conditioning
LEMP	Lightning electromagnetic pulse
UPS	Uninterruptible power supply
VPN	Virtual private network

## **5 Requirements and recommendations**

### **5.1 Overview**

#### **5.1.1 General**

The BACS project normally commences after the client appoints a BACS consultant or supplier.

The quality of the implementation of a BACS is dependent on the design of building systems and the specification of the commissioning process. The scope of commissioning referred to in this part of ISO 16484 is as defined in ISO 16484-2:2004, 3.42. In order to produce and maintain the required quality of building performance after the implementation has been completed, application of a commissioning process for review and improvement of commissioned values is recommended. Retro or continuous commissioning, including a commissioning authority, is not within the scope of this International Standard.

#### **5.1.2 Phases of the BACS project**

[ISO 16484-1:2010](https://standards.iteh.ai/catalog/standards/sist/06aacb5b-16af-4fde-9810-2020/iso-16484-1-2010)

[https://standards.iteh.ai/catalog/standards/sist/06aacb5b-16af-4fde-9810-](https://standards.iteh.ai/catalog/standards/sist/06aacb5b-16af-4fde-9810-2020/iso-16484-1-2010)

This clause specifies the main actions and decisions necessary in order to implement a project in the different phases (see Figure 1). It serves for all the parties involved in the different phases of a project. The phases of a project associated with the implementation of a BACS are as follows.

##### **5.1.2.1 Design phase**

The design phase consists of:

- a) the determination of project requirements;
- b) the project planning and organization;
- c) the technical specification;
- d) the establishment of a contract.

##### **5.1.2.2 Engineering phase**

The engineering phase consists of:

- a) project planning and coordination;
- b) detailed function and hardware specification design;
- c) engineering design approval;
- d) hardware configuration;

- e) control strategy and processing functions configuration;
- f) management and operator functions configuration;
- g) system testing.

#### 5.1.2.3 Installation phase

The installation phase consists of:

- a) installing;
- b) BACS commissioning.

#### 5.1.2.4 Completion phase

The completion phase consists of:

- a) system demonstration;
- b) operator training;
- c) handover;
- d) acceptance;
- e) finalization;
- f) completion decision.

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO 16484-1:2010](https://standards.iteh.ai/catalog/standards/sist/06aacb5b-16af-4fde-9810-02cd0e9e5d36/iso-16484-1-2010)

<https://standards.iteh.ai/catalog/standards/sist/06aacb5b-16af-4fde-9810-02cd0e9e5d36/iso-16484-1-2010>

#### 5.1.3 Documentation

Work done during the engineering, installation and completion phases will serve as a basis for providing as-built documentation, see 5.6.

#### 5.1.4 Training

Work done during the engineering, installation and completion phases will serve as a basis for providing training, see 5.7.

#### 5.1.5 Reviewing and improving building performance

This phase has been included for completeness. It does not form part of a BACS project but, after completion, improved building performance (according to the actual use) can be achieved by the BACS if the commissioned values are reviewed and amended periodically, providing improved energy performance and reduced operating costs. This can be achieved through the commissioning process, which is not covered in this International Standard.

#### 5.1.6 Graphical overview

A possible sequence of the important decisions and activities in each phase is shown in Figure 1. It is not prescriptive; some activities can be carried out earlier or later, depending on the project requirements, e.g. documentation and training.

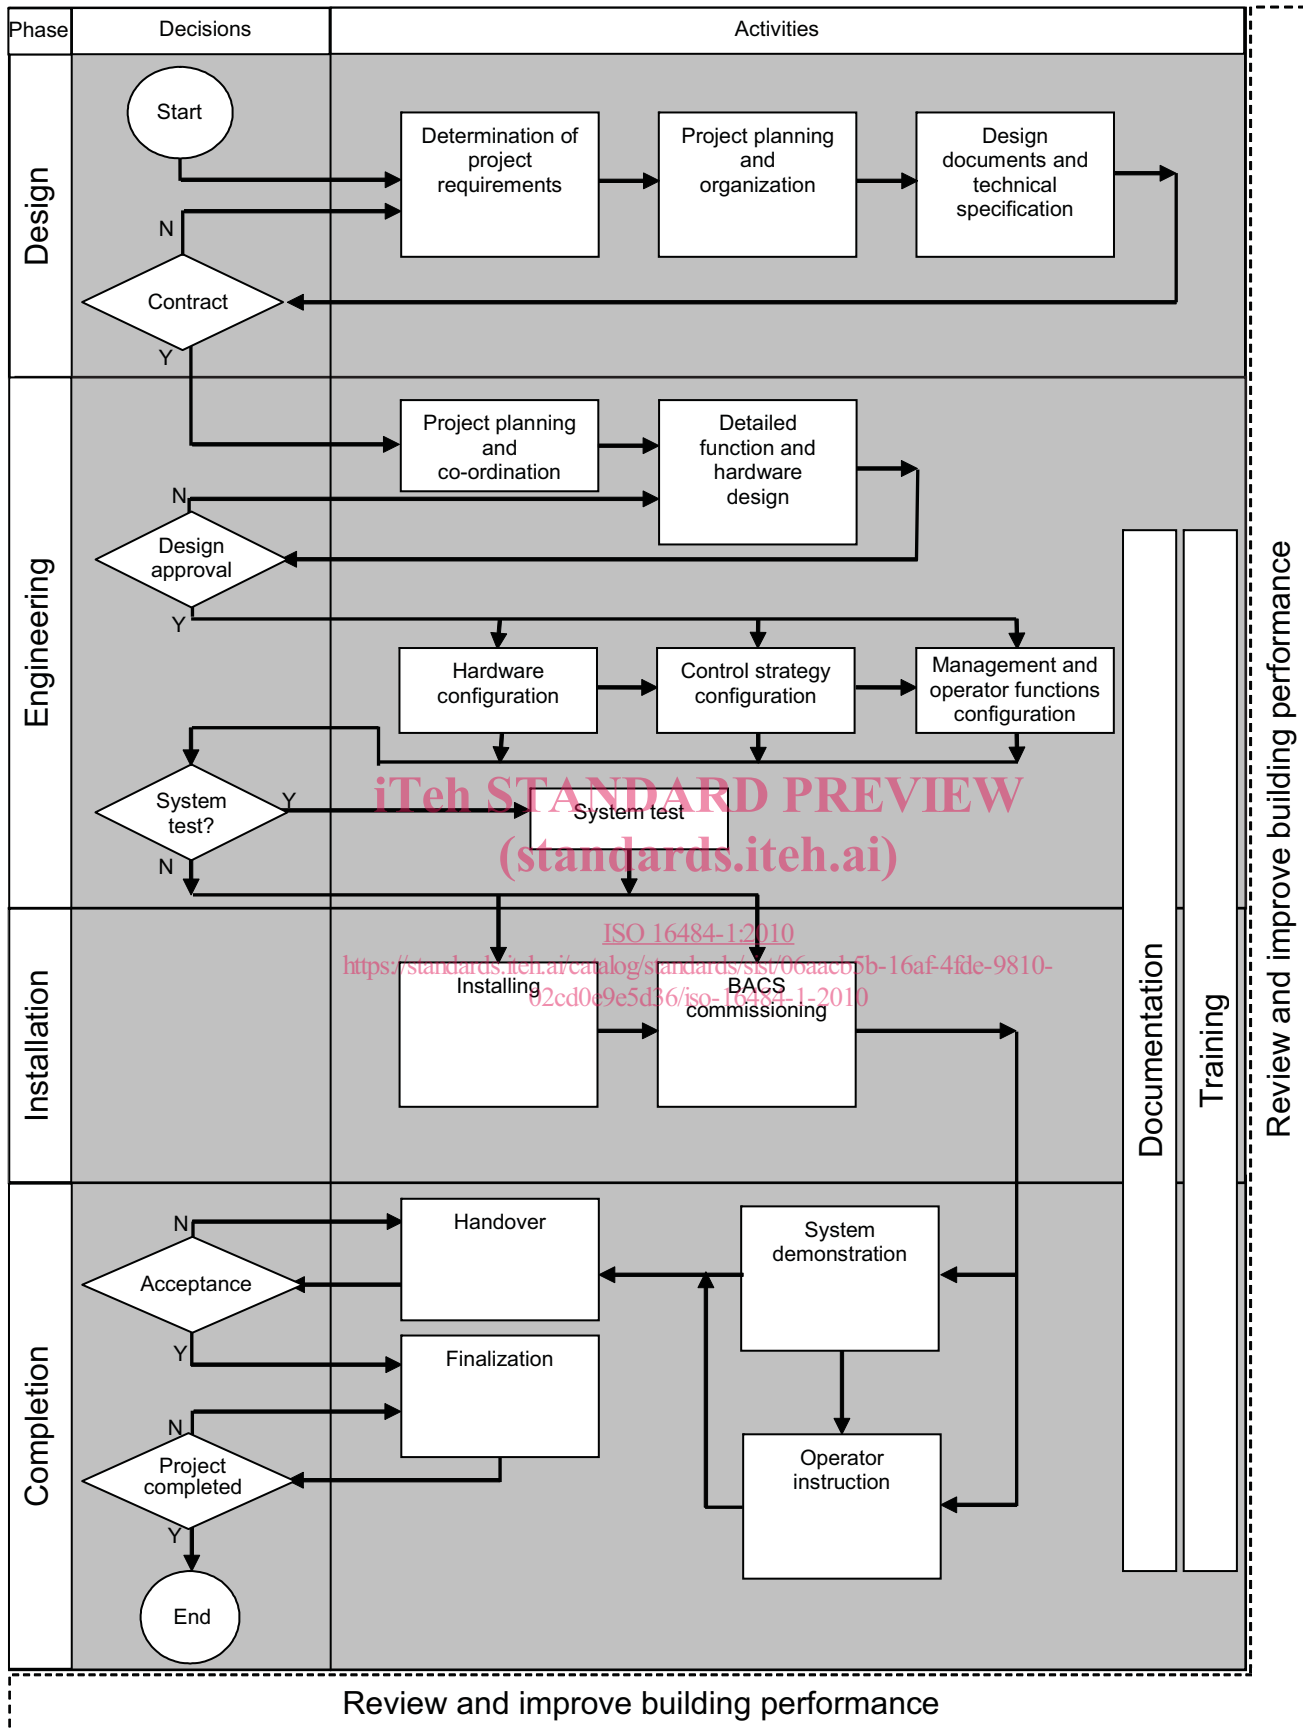


Figure 1 — Process and structure of BACS project implementation