



Standard Test Method for Dielectric Breakdown Voltage of Insulating Oils of Petroleum Origin Using VDE Electrodes¹

This standard is issued under the fixed designation D 1816; the number immediately following the designation indicates the year of original adoption or, in the case of revision, the year of last revision. A number in parentheses indicates the year of last reapproval. A superscript epsilon (ϵ) indicates an editorial change since the last revision or reapproval.

1. Scope

1.1 This test method covers the determination of the dielectric breakdown voltage of insulating oils of petroleum origin. This test method is applicable to liquid petroleum oils commonly used in cables, transformers, oil circuit breakers, and similar apparatus as an insulating and cooling medium. The suitability of this test method for testing oils having viscosity of more than 19 cSt, (100SUS) at 40°C (104°F) has not been determined. Refer to Terminology D 2864 for definitions used in this test method.

1.2 This test method is more sensitive to the deleterious effects of moisture in solution than is Test Method D 877, especially when cellulosic fibers are present in the oil. It has been found to be especially useful in diagnostic and laboratory investigations of the dielectric breakdown strength of oil in insulating systems.²

1.3 This test method should be used for the testing of oil in power system equipment where the oil has been filtered and vacuum filled.

1.4 Both the metric and the alternative inch-pound units are acceptable.

1.5 *This standard does not purport to address all of the safety concerns, if any, associated with its use. It is the responsibility of the user of this standard to establish appropriate safety and health practices and determine the applicability of regulatory limitations prior to use.*

2. Referenced Documents

2.1 ASTM Standards:

D 235 Specification for Mineral Spirits (Petroleum Spirits) (Hydrocarbon Dry Cleaning Solvent)³

D 877 Test Method for Dielectric Breakdown Voltage of Insulating Liquids Using Disk Electrodes⁴

D 923 Test Method for Sampling Electrical Insulating Liquids⁴

¹ This test method is under the jurisdiction of ASTM Committee D-27 on Electrical Insulating Liquids and Gases and is the direct responsibility of Subcommittee D27.05 on Electrical Tests.

Current edition approved May 10, 1997. Published January 1998. Originally published as D 1816 – 60 T. Last previous edition D 1816 – 84a.

² Supporting data is available from ASTM Headquarters. Request RR:D27-1006.

³ *Annual Book of ASTM Standards*, Vol 06.04.

⁴ *Annual Book of ASTM Standards*, Vol 10.03.

D 2864 Terminology Relating to Electrical Insulating Liquids and Gases⁴

2.2 IEEE Standard:

No. 4 Techniques for High Voltage Testing⁵

3. Significance and Use

3.1 The dielectric breakdown voltage of an insulating liquid is of importance as a measure of the liquid's ability to withstand electric stress without failure. It serves to indicate the presence of contaminating agents such as water, dirt, cellulosic fibers, or conducting particles in the liquid, one or more of which may be present in significant concentrations when low breakdown voltages are obtained. However, a high dielectric breakdown voltage does not necessarily indicate the absence of all contaminants; it may merely indicate that the concentrations of contaminants that are present in the liquid between the electrodes are not large enough to deleteriously affect the average breakdown voltage of the liquid when tested by this test method (see Appendix X1.)

4. Apparatus

4.1 *Transformer*— The desired test voltage may be most readily obtained by a step-up transformer energized from a variable low-voltage commercial power frequency source. To reduce the likelihood of external flashover and to minimize field distortion between the electrodes, a two-bushing, center-tap-grounded transformer is recommended. Design the transformer and controlling element of such size that, with the test specimen in the circuit, the voltage waveshape is approximately a sinusoid with both half cycles alike, and it should have a ratio of peak-to-rms value equal to the square root of two within $\pm 5\%$. The peak to rms value may be checked by means of an oscilloscope, a spheregap, or a peak-reading voltmeter in conjunction with an rms voltmeter. Where the wave form cannot be determined conveniently, a transformer having a rating of not less than $\frac{1}{2}$ kVA at the usual breakdown voltage shall be used. Transformers of larger kVA capacity may be used, but in no case should the short-circuit current in the specimen circuit be outside the range from 1 to 10 mA/kV of applied voltage. This limitation of current may be accomplished by using a suitable external series resistor or by

⁵ Available from the Institute of Electrical and Electronic Engineers, Inc., PO Box 1331, Piscataway, NJ 08855.

employing a transformer with sufficient inherent reactance.

4.2 *Circuit-Interrupting Equipment*—Protect the primary of the test transformer with an automatic circuit-breaking device capable of opening in three cycles or less on the current produced by breakdown of the test specimen, or up to five cycles if the short-circuit current as described in 4.1 does not exceed 200 mA. The current-sensing element that trips the circuit-breaker should operate when the specimen-circuit current is in the range from 2 to 20 mA. A prolonged flow of current at the time of breakdown causes carbonization of the liquid and pitting and heating of the electrodes, and thereby increases the electrode and test cell maintenance, and time of testing.

4.3 *Voltage-Control Equipment*—Raise the voltage $\frac{1}{2}$ kV/s $\pm 20\%$. The rate-of-rise may be calculated from measurements of the time required to raise the voltage between two prescribed values. Voltage control may be secured by a motor-driven variable-ratio-autotransformer. Preference should be given to equipment having an approximate straight-line voltage-time curve over the desired operating range. Motor drive is preferred to manual drive because of the ease of maintaining a reasonably uniform rate-of-voltage rise with this test method. When motor driven equipment is used, the speed control rheostat should be calibrated in terms of rate-of-voltage rise for the test transformer used.

4.4 *Voltmeter*—Measure the voltage using a method that fulfills the requirements of IEEE Standard No. 4, giving rms values, preferably by means of:

4.4.1 A voltmeter connected to the secondary of a separate potential transformer, or

4.4.2 A voltmeter connected to a well-designed tertiary coil in the test transformer, or

4.4.3 A voltmeter connected to the low-voltage side of the testing transformer if the measurement error can be maintained within the limit specified in 4.5.

4.5 *Accuracy*—The combined accuracy of the voltmeter and voltage divider circuit shall be such that measurement error does not exceed 5% at the rate-of-voltage rise specified in 4.3.

5. Electrodes

5.1 The electrodes shall be polished brass spherically-capped electrodes of the VDE (Verband Deutscher Elektrotechniker, Specification 0370) type having the dimensions shown in Fig. 1 $\pm 1\%$, mounted with axes horizontal and coincident.

5.2 The test cell shall be designed to permit easy removal of the electrodes for cleaning and polishing.

6. Test Cell

6.1 Construct the test cell as a cube. A cell having a capacity of approximately 0.95 L, has been found to be satisfactory for an electrode spacing of 2 mm or 0.080 in. A cell having a capacity of approximately 0.5 L has been found to be satisfactory for an electrode spacing of 1 mm or 0.040 in. Mount the electrodes rigidly from opposite sides with the gap approximately centered. Clearance from all other sides and any part of the stirring device is at least 12.7 mm ($\frac{1}{2}$ in.). Provide the test cell with a motor-driven two-bladed impeller measuring approximately 35 mm ($1\frac{3}{8}$ in.) between the blade extremities, having a pitch of approximately 40 mm or 1.57 in. (blade angle

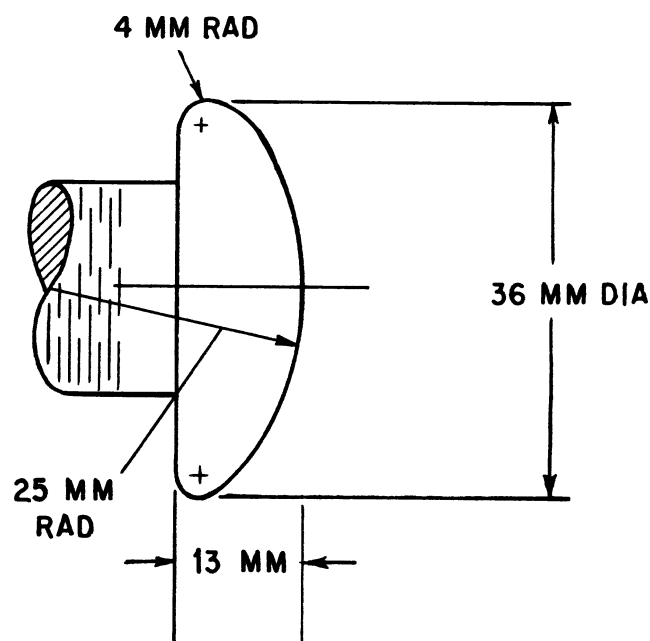


FIG. 1 VDE Electrode

of $20^\circ \pm 5\%$), operating at a speed between 200 and 300 rpm. The impeller, located below the lower edge of the electrodes, rotating in such a direction that the resulting liquid flow is directed downward against the bottom of the test cell. Construct the test cell of a material of high dielectric strength, that is not soluble in or attacked by any of the cleaning or test liquids used, and is nonabsorbent to moisture and the cleaning and test liquids. So that the breakdown may be observed, transparent materials are desirable, but not essential. In order to preclude stirring air with the sample, provide the cell with a cover or baffle that will effectively prevent air from contacting the circulating liquid.

7. Adjustment and Care of Electrodes and Test Cell

7.1 *Spacing*—With the electrodes firmly locked in position, check the electrodes with a standard round gage for 2-mm or 0.080-in. spacing, when a voltage source of a suitable range is available, or for 1-mm or 0.040-in. spacing when the test transformer voltage limit is restricted to approximately 50 kV. Flat “go” and “no-go” gages may be substituted having thicknesses of the specified value ± 0.03 mm for electrode spacings of 1 or 2 mm, or thicknesses of the specified value ± 0.001 in. for spacings of 0.040 or 0.080 in. If it is necessary to readjust the electrodes, lock the electrodes and check the spacing. For referee tests or tests that will be used for close comparisons, the laboratories shall agree in advance on the gap spacing for the tests. Four gaps are possible 0.040 or 0.080 in. or 1 or 2 mm. The gap agreed upon shall be measured with the gage that corresponds exactly to one of the selected gap within tolerance stated above for the gage.

7.2 *Cleaning*—Wipe the electrodes and cell clean with dry, lint-free tissue paper, or a clean dry chamois. It is important to avoid touching the electrodes or the cleaned gage with the fingers or with portions of the tissue paper or chamois that have been in contact with the hands. After adjustment of the gap spacing, rinse the cell with a dry hydrocarbon solvent, such as