



Technical Report

**Electromagnetic compatibility
and Radio spectrum Matters (ERM);
Short Range Devices (SRD) intended for operation
in the bands 865 MHz to 868 MHz and 915 MHz to 921 MHz;
Guidelines for the installation and commissioning
of Radio Frequency Identification (RFID) equipment at UHF**

STANDARD PREVIEW
(Standard for information only)
<https://standards.etsi.org/standards-search/8e50724b-db29-45ad-8e50-724b-2014-06-v2.1.1->

Reference

RTR/ERM-TG34-22

Keywords

ID, radio, short range, terrestrial

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:
<http://www.etsi.org>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at
<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:
http://portal.etsi.org/chaircor/ETSI_support.asp

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2014.
All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are Trade Marks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are Trade Marks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.
GSM® and the GSM logo are Trade Marks registered and owned by the GSM Association.

Contents

Intellectual Property Rights	5
Foreword.....	5
Modal verbs terminology.....	5
1 Scope	6
2 References	6
2.1 Normative references	6
2.2 Informative references.....	6
3 Definitions, symbols and abbreviations	7
3.1 Definitions	7
3.2 Symbols.....	7
3.3 Abbreviations	8
4 Principles of operation.....	8
4.1 Characteristics of RFID at UHF	9
4.1.1 Antennas	9
4.1.2 Data Rates	10
4.1.3 Intermodulation Products.....	10
4.1.4 De-tuning and absorption.....	10
4.1.5 Shielding.....	11
4.1.6 Transparent materials.....	12
4.2 Operation in the lower and upper bands according to EN 302 208	12
4.2.1 Dense interrogator mode.....	12
4.2.2 4 channel plan	13
4.2.3 Benefits of band at 915 - 921 MHz.....	14
4.2.4 Multiple interrogators.....	14
4.2.5 Sharing the spectrum with SRDs	14
4.2.6 Flags and the "Select" command	15
4.2.6.1 Session Flags.....	15
4.2.6.2 Selected Flag	16
4.2.6.3 Select Command	16
4.2.6.4 Use of flags and select commands	16
4.2.7 Fixed and portable interrogators	18
4.2.8 Near field systems.....	18
4.3 Operation in the band 868 - 870 MHz under EN 300 220.....	18
4.3.1 Hand held readers	19
4.3.2 Vehicle mounted interrogators.....	19
4.3.3 Proximity printers	19
4.4 CE Marking	19
5 Preliminary considerations	20
5.1 Acceptance Tests.....	20
6 Site considerations.....	20
6.1 Site survey	20
6.2 Basic principles	21
6.3 Antenna configurations	21
6.4 Configurations for near field systems at UHF.....	23
6.5 Tags using E.M. transmissions	23
6.6 Near field tags	24
6.7 Sources of interference	24
7 Recommendations for installation.....	25
7.1 Antenna fixtures	25
7.2 Selection of antennas.....	25
7.3 Positioning of the antenna	25

7.4	Outside antennas	25
7.5	Antennas for GSM-R receivers	26
7.6	Cabling	26
7.7	Earthing (Fixed Interrogators).....	26
7.8	RFID and Short Range Devices operating within the same area.....	27
8	Commissioning.....	27
8.1	Setting to work	27
8.2	Site records.....	27
9	Maintenance	27
Annex A: Conversion of units of measurement.....		29
A.1	Measurements of power	29
Annex B: Earthing systems		30
B.1	Earth System Minimum Requirements	30
B.2	Typical electrode and array characteristics	30
B.2.1	Vertical rod.....	30
B.2.2	Buried ring.....	31
B.2.3	Buried grid.....	31
B.2.4	Measurement of soil resistivity	31
B.3	Earthing of support structures and buildings.....	33
B.3.1	Ancillary equipment external to buildings	33
B.3.2	Metal support poles on buildings	33
B.3.3	Metal security fences.....	33
B.4	Interconnection of lightning protection systems with power supply earthing arrangements	33
Annex C: Prefabricated portals.....		34
Annex D: Commissioning procedure.....		35
Annex E: Bibliography		36
History		37

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://ipr.etsi.org>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Report (TR) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM).

Every TR prepared by ETSI is voluntary. This text should be considered as guidance only and does not make the present document mandatory.

The present document has been produced by ETSI in response to a perceived need by RFID manufacturers, installers and end users for general guidance on the installation and commissioning of RFID systems operating at UHF.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**may not**", "**need**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

1 Scope

The present document provides recommendations to system integrators and installers on good practice for the installation and commissioning of RFID systems operating at UHF at power levels up to 4 W e.r.p. Guidance is given on making best use of the available spectrum as envisaged within the ETSI standard EN 302 208 [i.1]. In addition the present document covers the use of reduced power RFID devices at UHF, such as hand held readers and proximity printers, operating in accordance with EN 300 220 [i.2]. This includes operation in the sub-bands 869,40 - 869,65 MHz at power levels of 500 mW and 869,7 - 870,0 MHz at power levels of 5 mW. In particular the present document considers the practices necessary to minimize interference in situations where multiple interrogators are co-located in close proximity. Failure to take the necessary precautions could lead to degradation in system performance. The present document also endeavours to cover the approaches necessary to ensure that the operational requirements of the end-user are met.

The present document concerns itself with radio matters only. It does not provide any guidance on computer hardware and software that may be used to process the data recovered from tags.

Many of the techniques recommended in the present document have been subject to practical tests in a working distribution centre. However each application is different and the techniques recommended in the present document may not be applicable in all situations.

End users may wish to make use of the present document as a general guide.

The present document does not cover matters related to Health and Safety. End-users and system integrators should familiarize themselves with the relevant national and international standards.

2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the reference document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

2.1 Normative references

The following referenced documents are necessary for the application of the present document.

Not applicable.

2.2 Informative references

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] ETSI EN 302 208 (Parts 1 and 2): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Radio Frequency Identification Equipment operating in the band 865 MHz to 868 MHz with power levels up to 2 W".
- [i.2] ETSI EN 300 220 (Parts 1 and 2): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Short Range Devices (SRD); Radio equipment to be used in the 25 MHz to 1 000 MHz frequency range with power levels ranging up to 500 mW".
- [i.3] CEPT ERC/REC 70-03: "Relating to the use of Short Range Devices (SRD)".

- [i.4] Void.
- [i.5] ISO/IEC 18000-6, Information technology - Radio frequency identification for item management - Part 6: Parameters for air interface communications at 860 MHz to 960 MHz General.
- [i.6] ETSI TS 102 902 (V1.2.1): "Electromagnetic compatibility and Radio spectrum matters (ERM); Methods, parameters and test procedures for cognitive interference mitigation towards ER-GSM for use by UHF RFID using Detect-And-Avoid (DAA) or other similar techniques".
- [i.7] TCAM (21)36: "Passive RFID tags at the stage of placing on the market and the R&TTE Directive".
- [i.8] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (R&TTE Directive).

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

assigned frequency band: frequency band within which the device is authorized to operate

dense-interrogator mode: RFID operating mode in which multiple interrogators can transmit simultaneously in the same channel while tags respond in the adjacent channels

frequency agile technique: technique used to determine an unoccupied sub-band in order to minimize interference with other users of the same band

interrogator: equipment that will activate an adjacent tag and read its data

NOTE: It may also enter or modify the information in a tag.

link frequency: frequency offset of the tag backscatter with respect to the centre frequency of the interrogating signal

load: collection of tagged items that are carried on a transportable device

lower band: frequency range 865,0 - 868,0 MHz designated for use by RFID

preferred channel: channel assigned to an interrogator which, provided it is available, is selected automatically as the channel of first choice

radiated measurements: measurements which involve the absolute measurement of a radiated field

reading range: maximum range at which a tag may be read by an interrogator

secondary channel: channels assigned to an interrogator, which is selected in the event that use of the primary preferred channel is not possible

tag: transponder that holds data and responds to an interrogation signal

upper band: frequency range 915 - 921 MHz designated for use by RFID

3.2 Symbols

For the purposes of the present document, the following symbols apply:

dB	decibel
dBm	power in decibels relative to 1 mW
d	distance
λ	wavelength

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AFA	Adaptive Frequency Agility
AM	Amplitude Modulated
BCCH	Broadcast Control Channel
CE	Conformité Européenne
CEPT	European Conference of Postal and Telecommunications Administrations
DAA	Detect and Avoid
E.M.	ElectroMagnetic
e.r.p.	effective radiated power
ECC	Electronic Communications Committee
EMC	ElectroMagnetic Compatibility
EPC	Electronic Product Code
ERC	European Radio communication Committee
ER-GSM	Extended Railways GSM
FM	Frequency Modulated
GSM-R	Railway GSM
LBT	Listen Before Talk
PIB	PolyIsoButylene
PM	Phase Modulated
R&TTE	Radio and Telecommunications Terminal Equipment
RCD	Residual Current Devices
RF	Radio Frequency
RFID	Radio Frequency Identification
SNMP	Simple Network Management Protocol
SRD	Short Range Device
UHF	Ultra High Frequency

4 Principles of operation

A basic RFID system comprises an interrogator with its associated antennas and a collection of tags. The antennas are arranged to transmit their signal within an interrogation zone. Tags are attached to either animate or inanimate objects that are to be identified. When a tag enters an interrogation zone, it is activated by the transmitted signal from the interrogator. Typically the tag will respond by sending its identity and possibly some associated data. The identity and data from the tag is validated by the receiver in the interrogator and passed to its host system. A block diagram of the principle is shown in figure 1.

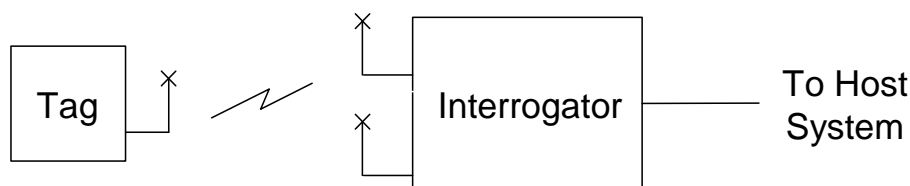


Figure 1: Principle of RFID

A sophisticated protocol is used to handle the transfer of data between the interrogator and tags. This ensures the integrity of data transfer and may include error checking and correction techniques. In addition the protocol handles the process for writing data to the tag and controls the procedure for reading multiple tags that may be present simultaneously within the same interrogation zone.

Across the whole of the radio spectrum three different forms of communication are used for the transfer of information between interrogators and tags. These are:

- Electrostatic.
- Inductive.
- Electromagnetic waves.

The present document confines itself solely to electromagnetic waves and near field techniques since they are the only forms of communication that are relevant for RFID at UHF.

To transfer information between an interrogator and a tag it is necessary to superimpose the data on a carrier wave. This technique is known as modulation. Various schemes are available to perform this function. They each depend on changing one of the primary features of an alternating sinusoidal source in accordance with the transmitted data. The most frequent choices of modulation are amplitude (AM), frequency (FM) and phase (PM).

Tags exist in a range of shapes and sizes to satisfy the particular needs of their intended application. Many tags are passive and derive the power for their operation from the field generated by the interrogator. However some tags are fitted with batteries, which may provide additional features (e.g. sensors) and may enable them to operate at significantly greater ranges.

4.1 Characteristics of RFID at UHF

UHF transmission takes place by means of electromagnetic (E.M.) waves. At these frequencies E.M. waves have properties that have many similarities to light. Transmissions travel in a straight line and the power of the received signal is a function of the inverse square of the distance from its source. For example if the distance from a transmit antenna is doubled the received power drops to one quarter. This property means that it is possible with UHF systems to achieve significant reading ranges. Operation in the UHF band also makes it possible to transfer information at high data rates. Both of these characteristics make UHF systems well suited for use in applications where tags are moving at speed or in which there are multiple tags present in an interrogation zone.

UHF can present the installer with a number of challenges. Electromagnetic transmissions at UHF are readily reflected from many surfaces. The reflections can cause the activation of unwanted tags and can also give rise to an effect known as standing wave nulls. These can produce points within the interrogation zone where there are very low levels of signal. UHF signals also experience significant levels of attenuation in the presence of water. In applications where water may be present, system integrators should therefore make suitable provision for a reduction in reading range during the design and configuration of the installation.

Operation is also possible using near field coupling between an interrogator and tags. This technique is useful in situations where there are many tags in a confined area and it is necessary to control the transmitted field. Near field systems generate magnetic fields that attenuate in accordance with the inverse cube of distance. Their properties therefore make them useful for reading tags at close range while avoiding activation of tags outside the area of interest. Near field techniques require the use of special antennas that are configured in the shape of a loop. Some tags have antennas that are capable of operating with both E.M. transmissions and near field coupling.

4.1.1 Antennas

At UHF the shape of the interrogation field generated by the E.M. antennas of an interrogator will typically be in the form of a cone. The angle subtended between the half power (or 3 dB) points of this cone is known as the beamwidth. Often beamwidth is specified in both horizontal and vertical values, which need not necessarily be the same. In many installations the long reading ranges possible at UHF mean that tags outside the wanted interrogation zone are inadvertently activated. The use of antennas with a narrow beamwidth provides one means by which it is possible to limit the area where tags may be read.

The most common type of antenna used at UHF is the patch antenna. This typically has a beamwidth of the order of 70 degrees. The patch antenna is fully satisfactory for many short to medium range applications where there are no other interrogators and unwanted tags in the immediate vicinity. In applications where longer reading ranges are required it may be necessary to control the extent of the interrogation zone more precisely. A first order of improvement may be achieved by using a variant of the standard patch antenna that is physically larger. This makes it possible to produce antennas with a horizontal beamwidth down to 30 degrees. Other types of antenna exist with narrower beamwidths. One of these is the helical antenna, which can have a beamwidth of as little as 10 degrees. This narrow beamwidth makes it possible to generate an interrogation zone that is very directional.

As the beamwidth of an antenna is reduced the transmitted power is compressed into a smaller volume, which produces increased field intensity. This effect is known by the term "antenna gain". Since the radio regulations limit the maximum field level that is permitted, it is necessary to reduce the level of power generated by the interrogator to compensate for the increased gain of the antenna. Where the use of different antennas is allowed by the manufacturer, details of how this adjustment should be carried out should be included within the product manual for the interrogator.

Generally transmissions from the antenna of the interrogator will be circularly polarized. This eliminates differences in the reading range of tags caused by their orientation in the x and y planes (but not the z plane, which is the direction of travel of the radio wave). The variation of reading range with orientation in the z plane is considered under "Recommendations for mounting tags" in clause 6.5.

4.1.2 Data Rates

The maximum data rate of the communication link from the interrogator to the tag (sometimes called the downlink) is determined by the size of the permitted channel of operation of the interrogator. The size of the channel is specified in ERC/CEPT 70-03 [i.3] and is effectively a fixed parameter. For channels of 200 kHz channel spacing as defined for the lower band in annex 11 of ERC/CEPT 70-03 [i.3] the maximum possible data rate is of the order of 40 kbits per second. For the upper band the channel width is 400 kHz and the data rate is 80 kbits per second. However the protocol used for transferring the information includes error checking and other features, which reduce the effective speed of information transfer. Details of the agreed standard data rates are included in ISO/IEC 18000-6 [i.5].

In most situations the response from the tag (sometimes called the uplink) will lie in the same, or adjacent channels as the downlink. This will place a practical limit on the achievable data rate. Where interrogators operate in accordance with the 4 channel plan in the lower band as specified in EN 302 208 [i.1], the tag may be set to operate at link frequencies of approximately 300 kHz. The upper band uses a link frequency of 600 kHz. This leads to data rates of 75 kbits per second and 150 kbits per second respectively.

4.1.3 Intermodulation Products

Where two or more devices are sited close to each other and are transmitting at similar frequencies, they may interfere with each other. This can arise through the generation of intermodulation products. These are unwanted transmissions that occur at frequencies that are at multiples of the sum and difference of the transmitting frequencies. Intermodulation products can adversely affect the performance of both interrogators and tags.

The effect of intermodulation products may be reduced to an acceptable level by reducing the power received from adjacent transmitters. This may be achieved either by the introduction of shielding or by increasing the physical separation between transmitters. As a general guide for acceptable operation the power received by an interrogator or tag from an adjacent transmitter should be at least 20 dB less than the power received from the wanted transmission.

An alternative mitigation technique is to arrange for adjacent transmitters to operate on different channels. The frequencies should be sufficiently spaced apart that any intermodulation products do not degrade the performance of the device. From practical tests and measurements it has been determined that for adjacent interrogators and their tags to operate satisfactorily, the frequency separation between them should be at least 1 MHz.

4.1.4 De-tuning and absorption

The proximity of certain materials to UHF tags may cause a significant reduction in their reading range. This effect is due predominantly to de-tuning of the resonant frequency of the tag. Spacing the tag a small distance away from the material can significantly reduce this effect. However the application may impose a restriction on the extent to which spacing is acceptable. Alternatively where the material to be tagged is known in advance, it may be possible to adjust the tuning of the tag to compensate. Nevertheless recovery of the full free space reading range is unlikely to be achieved. This difference is due to power absorption by the material.

In situations where an electromagnetic wave meets a boundary between two dissimilar materials, some of the energy is reflected at the surface and some of the energy passes into the material. The proportion of the energy that passes into the material is a function of its physical properties (known as its dielectric constant). This process is repeated at each boundary between two dissimilar materials.

Where a tag is read through an object the consequent reduction in the level of signal reaching the tag will reduce its reading range. Some indication of the scale of reduction in reading range caused by different materials is given in Table 1. The figures in the table are based on some informal tests and are illustrative only.

Table 1: Typical effect of materials on performance

Scenario	Reference Distance (cm)	Range (cm)	(R/Rref)**2	Loss dB
Air	200	200	1,00	0,00
Tag on front of plastic case	200	180	1,23	0,90
Tag on front of plywood sheet	200	131	2,33	3,68
Tag on front of wood block 2,5 cm deep	200	120	2,78	4,44
Tag on front of paper 3 cm thick	200	108	3,43	5,35
Tag on front of empty plastic jug	200	149	1,80	2,56
Tag on rear of empty plastic jug	200	138	2,10	3,22
Tag on front of plastic jug filled with tap water	200	46	18,90	12,77
Tag on rear of plastic jug filled with tap water	200	31	41,62	16,19
Tag behind metal mesh 10 x 10 cm	200	28	51,02	17,08
Tag behind metal mesh 1 x 1 mm	200	10	400,00	26,02

NOTE: For the purpose of making these measurements the transmit level from the interrogator was set to a constant value.

An associated effect, which can also reduce the reading range of a tag, is its proximity and orientation with respect to other adjacent tags. The effect is greatest where tags are parallel with each other since this produces the highest level of mistuning and absorption. A similar situation arises where a second tag is positioned a short distance behind the first one and in line with the transmission path from an interrogator. The tag nearest to the interrogator creates a "shadow", which reduces the field available to power the tag that is further away.

It is important for end-users to understand and assess the impact of all of the above effects on their application.

In applications in which near field techniques are used the above effects will be significantly reduced.

4.1.5 Shielding

A particular difficulty with systems operating at UHF is that the E.M. signal transmitted by an antenna may extend over a significant distance. Situations may therefore arise where tags outside the wanted interrogation zone may inadvertently be activated. The responses from these unwanted tags may be read by the interrogator and passed to its host. It is important for installers to be aware of this problem and ensure that the size of the interrogation field is the minimum necessary and does not extend into areas that may contain unwanted tags. This requirement may create particular difficulties in situations where adjacent interrogation zones and storage areas are physically close to each other. One technique that may be used to contain the interrogation zone is shielding. There are two possible approaches, which are:

- Reflection of the transmitted signal.
- Absorption of the transmitted signal.

The reflective approach involves placing an electrically conductive surface in the path of the transmitted signal. The radio signal is unable to pass through the conductive surface but instead is reflected off it in a similar manner to light reflected by a mirror. While this stops the transmitted signal from passing into the unwanted area, consideration should be given to the path of the reflected signal. Since very little power is dissipated in the reflection process, the reflected signal may bounce off yet further surfaces and end up in unwanted areas. It has also to be remembered that reflections may create holes in the field (due to standing wave nulls), which may prevent the activation of wanted tags. Not all situations are therefore amenable to the use of reflective materials.