



SLOVENSKI STANDARD
SIST EN 301 246 V4.0.1:2003
01-december-2003

8 [[]HJb]`W] b]`hY`ca i b]_UW`g_]`g]ghYa `fZuU&L`E`BUXca Yy Ub`Y]b`i h]yUb`Y
]n[i V`Yb]`c_j]fcj `df]`dfca Ytb]`_UbU]`nU]nVc`yUb]] cj cf`g`dc`bc` \]lfcg]t
 fØ: FŁf] GA `\$*`%`žfUh`]WJ('\$`%&

Digital cellular telecommunications system (Phase 2) (GSM); Substitution and muting of lost frames for Enhanced Full Rate (EFR) speech traffic channels (GSM 06.61 version 4.0.1)

iteh STANDARD PREVIEW
(standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/7e6d8f2f-c22d-4c4a-9c3b-6ad9f9f260fd/sist-en-301-246-v4-0-1-2003>

Ta slovenski standard je istoveten z: EN 301 246 Version 4.0.1

ICS:

33.070.50	Globalni sistem za mobilno telekomunikacijo (GSM)	Global System for Mobile Communication (GSM)
-----------	---------------------------------------------------	----------------------------------------------

SIST EN 301 246 V4.0.1:2003 en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 301 246 V4.0.1:2003](https://standards.iteh.ai/catalog/standards/sist/7e6d8f2f-c22d-4c4a-9c3b-6ad9f9f260fd/sist-en-301-246-v4-0-1-2003)

<https://standards.iteh.ai/catalog/standards/sist/7e6d8f2f-c22d-4c4a-9c3b-6ad9f9f260fd/sist-en-301-246-v4-0-1-2003>

EN 301 246 V4.0.1 (1997-12)

European Standard (Telecommunications series)

Digital cellular telecommunications system (Phase 2); Substitution and muting of lost frames for Enhanced Full Rate (EFR) speech traffic channels (GSM 06.61 version 4.0.1)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

GSM®
GLOBAL SYSTEM FOR
MOBILE COMMUNICATIONS

[SIST EN 301 246 V4.0.1:2003](https://standards.iteh.ai/catalog/standards/sist/7e6d8f2f-c22d-4c4a-9c3b-6ad9f9f260fd/sist-en-301-246-v4-0-1-2003)

<https://standards.iteh.ai/catalog/standards/sist/7e6d8f2f-c22d-4c4a-9c3b-6ad9f9f260fd/sist-en-301-246-v4-0-1-2003>



European Telecommunications Standards Institute

Reference

DEN/SMG-110661P (bjc0200o.PDF)

Keywords

Digital cellular telecommunications system,
Global System for Mobile communications (GSM)

ETSI Secretariat

Postal address

F-06921 Sophia Antipolis Cedex - FRANCE

Office address

650 Route des Lucioles - Sophia Antipolis
Valbonne - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 NAF 742 C

Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88
<https://standards.globalspec.com/stds/etsi/301-246-v4-0-1-2003>

X.400

c= fr; a=atlas; p=etsi; s=secretariat

Internet

secretariat@etsi.fr

<http://www.etsi.fr>

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

Contents

Intellectual Property Rights.....	4
Foreword	4
1 Scope.....	5
2 Normative references	5
3 Definitions and abbreviations	5
3.1 Definitions	5
3.2 Abbreviations.....	5
4 General	6
5 Requirements	6
5.1 Error detection	6
5.2 Lost speech frames.....	6
5.3 First lost SID frame.....	6
5.4 Subsequent lost SID frames	6
6 Example solution.....	6
6.1 Example solution for substitution and muting of lost speech frames	6
6.2 Example solution for substitution and muting of lost SID frames.....	9
History	10

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 301 246 V4.0.1:2003](https://standards.iteh.ai/catalog/standards/sist/7e6d8f2f-c22d-4c4a-9c3b-6ad9f9f260fd/sist-en-301-246-v4-0-1-2003)

<https://standards.iteh.ai/catalog/standards/sist/7e6d8f2f-c22d-4c4a-9c3b-6ad9f9f260fd/sist-en-301-246-v4-0-1-2003>

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETR 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available **free of charge** from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.fr/ipr>).

Pursuant to the ETSI Interim IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETR 314 (or the updates on <http://www.etsi.fr/ipr>) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by the Special Mobile Group (SMG) Technical Committee of the European Telecommunications Standards Institute (ETSI).

This EN defines a frame substitution and muting procedure which is used by the Receive (RX) Discontinuous Transmission (DTX) handler when one or more lost speech or Silence Descriptor (SID) frames are received from the Radio Sub System (RSS) within the digital cellular telecommunications system.

This EN corresponds to GSM technical specification, GSM 06.61, version 4.0.0.

iTech National transposition dates (standards.iteh.ai)		
Date of adoption of this EN:		19 December 1997
Date of latest announcement of this EN (doa):	SIST EN 301 246 V4.0.1:2003	31 March 1998
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	https://standards.iteh.ai/catalog/standards/sist/7e6d8f2f-c22d-4c4a-9c3b-6ad9f12601d/sist-en-301-246-v4-0-1-2003	30 September 1998
Date of withdrawal of any conflicting National Standard (dow):		30 September 1998

1 Scope

This EN defines a frame substitution and muting procedure which shall be used by the Receive (RX) Discontinuous Transmission (DTX) handler when one or more lost speech or Silence Descriptor (SID) frames are received from the Radio Sub System (RSS).

The requirements of this EN are mandatory for implementation in all GSM Base Station Systems (BSS)s and Mobile Stations (MS)s capable of supporting the enhanced Full Rate speech traffic channel. It is not mandatory to follow the bit exact implementation outlined in this EN and the corresponding C-source code.

2 Normative references

This EN incorporates by dated and undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this EN only when incorporated in it by amendment or revision. For undated references, the latest edition of the publication referred to applies.

- [1] GSM 05.03 (ETS 300 575): "Digital cellular telecommunications system (Phase 2); Channel coding".
- [2] GSM 06.60 (EN 301 245): "Digital cellular telecommunications system; Enhanced Full Rate (EFR) speech transcoding".
- [3] GSM 06.81 (EN 301 248): "Digital cellular telecommunications system; Discontinuous transmission (DTX) for Enhanced Full Rate (EFR) speech traffic channels".
- [4] GSM 08.60 (ETS 300 737): "Digital cellular telecommunications system (Phase 2+); Inband control of remote transcoders and rate adaptors for Enhanced Full Rate (EFR) and full rate traffic channels".

[SIST EN 301 246 V4.0.1:2003](https://standards.iteh.ai/catalog/standards/sist/7e6d8f2f-c22d-4c4a-9c3b-6ad9f9f260fd/sist-en-301-246-v4-0-1-2003)

[https://standards.iteh.ai/catalog/standards/sist/7e6d8f2f-c22d-4c4a-9c3b-](https://standards.iteh.ai/catalog/standards/sist/7e6d8f2f-c22d-4c4a-9c3b-6ad9f9f260fd/sist-en-301-246-v4-0-1-2003)

[6ad9f9f260fd/sist-en-301-246-v4-0-1-2003](https://standards.iteh.ai/catalog/standards/sist/7e6d8f2f-c22d-4c4a-9c3b-6ad9f9f260fd/sist-en-301-246-v4-0-1-2003)

3 Definitions and abbreviations

3.1 Definitions

For the purposes of this EN, the following definition applies:

5-point median operation: Consists of sorting the 5 elements belonging to the set for which the median operation is to be performed in an ascending order according to their values, and selecting the third largest value of the sorted set as the median value.

Further definitions of terms used in this EN can be found in GSM 06.60 (EN 301 245) [2], GSM 06.81 (EN 301 248) [3], GSM 05.03 (ETS 300 575)[1] and GSM 08.60 (ETS 300 737) [4].

3.2 Abbreviations

For the purposes of this EN, the following abbreviations apply:

BFI	Bad Frame Indication from Radio Sub System
BSI_Abis	Bad Sub-block Indication obtained from A-bis CRC checks
PrevBFI	Bad Frame Indication of Previous frame
RSS	Radio Sub System
RX	Receive
DTX	Discontinuous transmission
SID	Silence Descriptor frame
CRC	Cyclic Redundancy Check
CCU	Channel Coding Unit

median5	5-point median operation
TRAU	Transcoding Rate Adaptation Unit

4 General

The purpose of frame substitution is to conceal the effect of lost frames. The purpose of muting the output in the case of several lost frames is to indicate the breakdown of the channel to the user and to avoid generating possible annoying sounds as a result from frame substitution procedure.

The RSS indicates lost speech or SID frames by setting its Bad Frame Indication flag (BFI) based on its 3-bit and 8-bit CRCs and possibly other error detection mechanisms. The TRAU calculates from the CRCs inserted by the CCU in the TRAU frames one BSI_Abis flag for every sub-block of speech parameters. If either one or more of these flags is set, the speech decoder shall either perform frame substitution or subframe substitution.

The example solution provided in clause 6 applies only for bad frame handling on a complete speech frame basis. However some parts could be modified for substitution of bad sub-blocks.

5 Requirements

5.1 Error detection

An error is detected and the BFI flag is set by the RSS according to the principle described in clause 4.

5.2 Lost speech frames

Normal decoding of lost speech frames would result in very unpleasant noise effects. In order to improve the subjective quality, lost speech frames shall be substituted with either a repetition or an extrapolation of the previous good speech frame(s). This substitution is done so that it will gradually decrease the output level, resulting in silencing of the output. Subclause 6.1 gives an example solution.

5.3 First lost SID frame

A single lost SID frame shall be substituted by the last valid SID frame and the procedure for valid SID frames be applied as described in GSM 06.61 (EN 301 248) [3].

5.4 Subsequent lost SID frames

For the second lost SID frame, a muting technique shall be used on the comfort noise that will gradually decrease the output level (-3 dB/frame), resulting in silencing of the output of the decoder.

For subsequent lost SID frames, the muting of the output shall be maintained. Subclause 6.2 gives an example solution.

6 Example solution

The C-code of the following example is embedded in the bit exact software of the enhanced full rate codec.

6.1 Example solution for substitution and muting of lost speech frames

This example solution for substitution and muting is based on a state machine with seven states (figure 1).

The system starts in state 0. Each time a bad frame is detected, the state counter is incremented by one and is saturated when it reaches 6. Each time a good speech frame is detected, the state counter is reset to zero, except when we are in state 6, where we set the state counter to 5. The state indicates the quality of the channel: the bigger the state counter, the worse the channel quality is. The control flow of the state machine can be described with the following C-code (**BFI** = bad frame indicator, **State** = state variable):

```

if(BFI != 0 )
    State = State + 1;
else if(State == 6)
    State = 5;
else
    State = 0;
if(State > 6 )
    State = 6;

```

In addition to this state machine, the **Bad Frame Flag** from the previous frame is checked (**PrevBFI**). The processing depends on the value of the **State**-variable. In states 0 and 5, the processing depends also on the two flags **BFI** and **PrevBFI**.

The procedure can be described as follows:

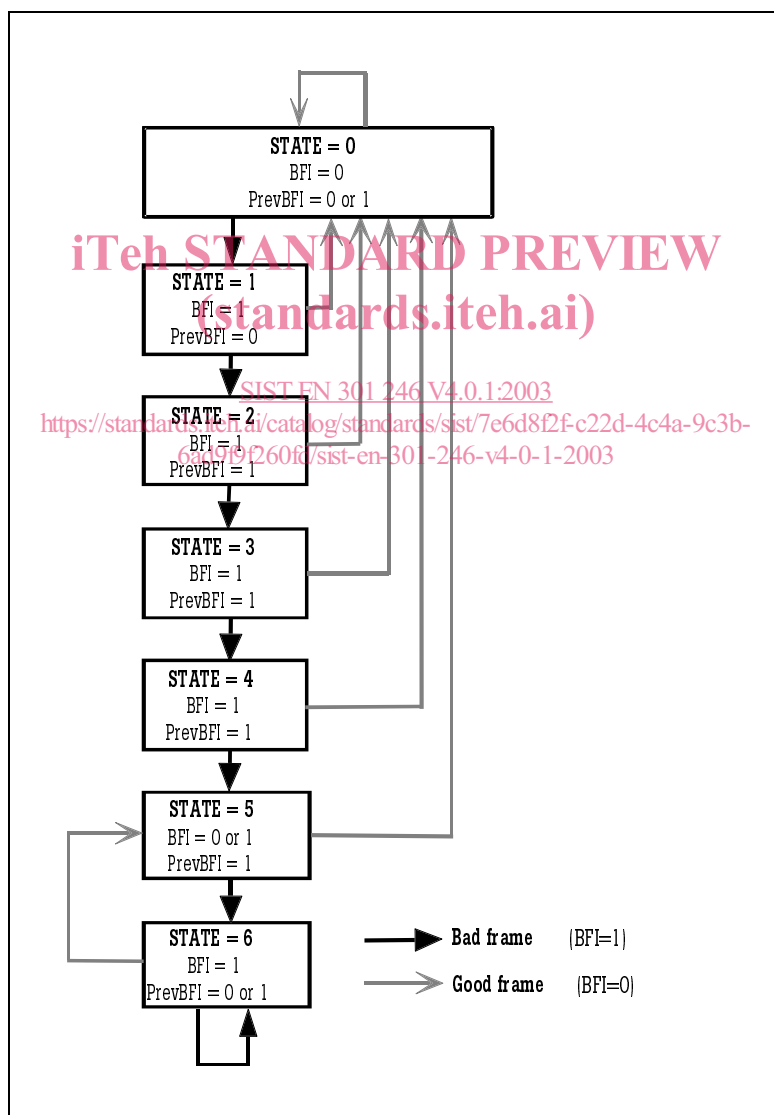


Figure 1: State machine for controlling the bad frame substitution

BFI = 0, PrevBFI = 0, State = 0

No error is detected in the received or in the previous received speech frame. The received speech parameters are used normally in the speech synthesis. The current frame of speech parameters is saved.