

INTERNATIONAL STANDARD



**Organic light emitting diode (OLED) displays –
Part 5-3: Measuring methods of image sticking and lifetime**
PREVIEW
(standards.itech.ai)

IEC 62341-5-3:2019

<https://standards.itech.ai/catalog/standards/sist/8e04b6be-50b5-466e-9f39-08bcf62f28cc/iec-62341-5-3-2019>



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2019 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

67 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

[IEC 62341-5-3:2019](https://standards.iteh.ai/catalog/standards/sist/8c04b6bc-50b5-466e-9f39-08bcf62f28cc/iec-62341-5-3-2019)

<https://standards.iteh.ai/catalog/standards/sist/8c04b6bc-50b5-466e-9f39-08bcf62f28cc/iec-62341-5-3-2019>

INTERNATIONAL STANDARD



Organic light emitting diode (OLED) displays – Part 5-3: Measuring methods of image sticking and lifetime

<https://standards.iteh.ai/catalog/standards/sist/8e04b6be-50b5-466e-9f39-08bcf62f28cc/iec-62341-5-3-2019>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 31.120; 31.260

ISBN 978-2-8322-7455-2

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD	4
1 Scope	6
2 Normative references	6
3 Terms, definitions and abbreviated terms	6
3.1 Terms and definitions	6
3.2 Abbreviated terms	7
4 Measuring configuration	7
4.1 General	7
4.2 Light measuring device	8
5 Standard measuring conditions	8
5.1 Standard measuring environmental conditions	8
5.2 Standard measuring darkroom conditions	8
5.3 Standard setup conditions	8
5.3.1 General	8
5.3.2 Adjustment of OLED display	8
5.3.3 Starting conditions of measurements	9
5.3.4 Test patterns	9
5.3.5 Conditions of measuring equipment	11
6 Measuring methods of image sticking	11
6.1 Purpose	11
6.2 Measuring method	11
6.2.1 Measuring equipment	11
6.2.2 Measuring procedure	11
6.3 Analysis and report	12
6.3.1 Analysis	12
6.3.2 Report	14
7 Measuring methods of the luminance lifetime	16
7.1 Purpose	16
7.2 Measuring method	16
7.2.1 Measuring equipment	16
7.2.2 Measuring procedure	16
7.2.3 Estimation of luminance lifetime	17
Annex A (informative) Calculating method for equivalent signal level to reflect the characteristics of the OLED display	19
A.1 Purpose	19
A.2 Determining the equivalent signal level	19
A.2.1 General	19
A.2.2 Calculation of the normalized luminance intensity	19
A.2.3 Examples of extracted equivalent signal level	22
Annex B (informative) Colour difference with CIEDE2000	25
B.1 Purpose	25
B.2 Calculation of colour difference	25
Bibliography	26
Figure 1 – Measuring system and arrangement	7

Figure 2 – Test pattern for SDR displays.....	9
Figure 3 – Image sticking measuring area.....	10
Figure 4 – Test pattern for HDR displays	11
Figure 5 – Example of the resulting image after image stress	12
Figure 6 – Example of luminance behavior in operation for an OLED display module	16
Figure 7 – Example of lifetime estimation with the extrapolation method	17
Figure 8 – Examples of estimated lifetime depending on the time elapsed	18
Figure A.1 – Measured 10 mA/cm ² to 80 mA/cm ² OLED degradation values and corresponding modelled functions with $m = 1 / 1,7$	20
Figure A.2 – Example of accumulated colour intensity of IEC 62087:2011 10-min video loop in RGB subpixel format with equivalent signal distribution chart based on the left images.....	23
Figure A.3 – Example of accumulated colour intensity of the IEC 62087:2011 10-min video loop in W, R, G, and B format, with equivalent signal distribution chart based on the left images	24
Table 1 – Examples of maximum and average code value extracted from video samples	10
Table 2 – Information on test pattern	14
Table 3 – Example of typical value.....	15
Table 4 – Reporting format of the image sticking data at target time	15
Table 5 – Reporting format of the image sticking time with threshold	15
Table A.1 – Examples of the maximum and the average equivalent signal levels (8 bits)	22

IEC 62341-5-3:2019
<https://standards.iteh.ai/catalog/standards/sist/8e04b6be-50b5-466e-9f39-08bcf62f28cc/iec-62341-5-3-2019>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

ORGANIC LIGHT EMITTING DIODE (OLED) DISPLAYS –**Part 5-3: Measuring methods of image sticking and lifetime****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
<https://standards.iteh.ai/catalog/standards/sist/9-0416-50b5-166e-9f79-4eaf-40391c-ec40-000000000000/iec-62341-5-3-2019>
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62341-5-3 has been prepared by IEC technical committee 110: Electronic displays.

This second edition replaces the first edition published in 2013. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) the measurement vehicle for lifetime is only for the module;
- b) the measurement method for monitor or TV devices is modified;
- c) the digital signage display is included as an example of OLED devices;
- d) the measurement method with HDR (high dynamic range) for image sticking is added;
- e) the analysis method with CIEDE 2000 is added for image sticking;
- f) the information method for evaluating image sticking is modified.

The text of this standard is based on the following documents:

FDIS	Report on voting
110/1134/FDIS	110/1154/RVD

Full information on the voting for the approval on this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all the parts in the IEC 62341 series, under the general title *Organic light emitting diode (OLED) displays*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed;
- withdrawn;
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

STANDARD PREVIEW
(standards.iteh.ai)

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

ORGANIC LIGHT EMITTING DIODE (OLED) DISPLAYS –

Part 5-3: Measuring methods of image sticking and lifetime

1 Scope

This part of IEC 62341 specifies the standard measuring methods for determining the image sticking and lifetime of organic light emitting diode (OLED) display panels and modules, except finalized display products for end customers, such as TV sets, monitor sets and mobile phones. The measuring method for the lifetime mainly applies to modules.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050-845, *International Electrotechnical Vocabulary (IEV) – Part 845: Lighting* (available at <<http://www.electropedia.org>>)

IEC 62341-1-2, *Organic light emitting diode (OLED) displays – Part 1-2: Terminology and letter symbols*

IEC 62341-6-1:2017, *Organic light emitting diode (OLED) displays – Part 6-1: Measuring methods of optical and electro-optical parameters*

ISO 11664-1, *Colorimetry – Part 1: CIE standard colorimetric observers*

CIE 15, *Colorimetry*

3 Terms, definitions and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 62341-1-2 and IEC 60050-845 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1.1

equivalent current density

average current density of a certain pixel calculated from a varying luminance per frame image in a moving picture so that luminance degradation becomes similar at the same time

Note 1 to entry: See Annex A.

3.1.2

equivalent signal level

digital code value from 0 to 255 (in the case of 8 bits) transformed from the normalized luminance of a certain pixel by a specified opto-electronic transfer function (OETF)

Note 1 to entry: See Annex A.

3.2 Abbreviated terms

For the purposes of this document, the following abbreviated terms apply.

APL	average picture level
CIELAB	CIE 1976(L*a*b*) colour space
DUT	devices under test
EOTF	electro-optical transfer function
FWHM	full-width-at-half-maximum
HDR	high dynamic range
LMD	light measuring device
OETF	opto-electronic transfer function
OLED	organic light emitting diode
PQ	perceptual quantizer
SDR	standard dynamic range


4 Measuring configuration

4.1 General

IEC 62341-5-3:2019

<https://standards.iteh.ai/catalog/standards/sist/8e04b6be-50b5-466e-9f39-7a4a1e041545-iec-62341-5-3-2019>

The system diagrams and/or operating conditions of the measuring equipment shall comply with the structure specified in each item. The measuring system and its arrangement are shown in Figure 1. The details are given in Clause 5.

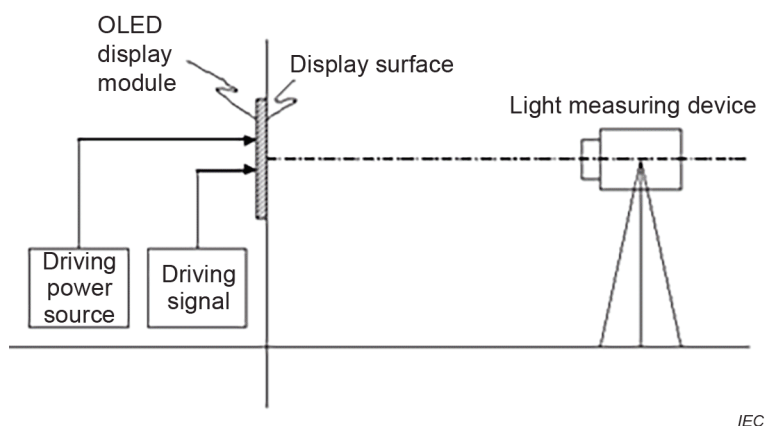

IEC

Figure 1 – Measuring system and arrangement

4.2 Light measuring device

The optical properties of displays shall generally be expressed in photometric or colorimetric units using the CIE 1931 standard colorimetric two-degree observer (see ISO 11664-1). Luminance can be measured by a photometer, and the CIE tristimulus values (X , Y , Z) or CIE chromaticity coordinates by a colorimeter. A spectroradiometer can also obtain photometric and colorimetric values through a numerical conversion of the measured spectral radiance data (see, for example, [1]¹). The following requirements are given for these instruments:

The LMD shall be a luminance meter, colorimeter, or a spectroradiometer. For DUTs that have sharp spectral peak full-width-at-half-maximums (FWHMs) smaller than 20 nm, a spectroradiometer should be used. A filter colorimeter should generally not be used for light sources with sharp spectral peaks. If they are used, the colorimeter shall be calibrated with a narrow bandwidth spectroradiometer to give the same results for the specific spectrum. Report the characteristics of the spectroradiometer which is used for calibration. For light sources with sharp spectral peaks, the maximum bandwidth of the spectroradiometer shall be ≤ 5 nm. The higher resolution spectroradiometer produces a more accurate colour measurement. In those cases, the wavelength accuracy shall be within $\pm 0,5$ nm. The spectroradiometer shall be capable of measuring spectral radiance over at least the 380 nm to 780 nm wavelength range, with a maximum bandwidth of 10 nm for smooth broadband spectra (i.e. broad spectrum with no sharp spikes).

Care shall be taken to ensure that the LMD has enough sensitivity and dynamic range to perform the required task. Before measuring the DUT, the LMD specification shall be checked.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

5 Standard measuring conditions

5.1 Standard measuring environmental conditions

The standard measuring environmental conditions specified in IEC 62341-6-1:2017, 5.1, shall be applied. For image sticking measurements, the environmental temperature shall be controlled at $25\text{ °C} \pm 3\text{ °C}$, otherwise a temperature-controlled detector shall be used. (The stability of the LMD shall be less than 1/5 of the intended detecting difference levels of luminance and colour.)

5.2 Standard measuring darkroom conditions

The standard measuring darkroom conditions specified in IEC 62341-6-1:2017, 5.2, shall be applied.

5.3 Standard setup conditions

5.3.1 General

Standard setup conditions are given below. Any deviations from these conditions shall be recorded.

5.3.2 Adjustment of OLED display

The adjustment of the OLED display specified in IEC 62341-6-1:2017, 5.3.2, shall be applied.

¹ Numbers in square brackets refer to the Bibliography.

5.3.3 Starting conditions of measurements

Warm-up time is defined as the time elapsed from the moment of switching on the supply voltage until repeated measurements of the display show a variation in luminance of less than 2 %/min. Repeated measurements shall be taken for a period of at least 15 min after starting. The luminance variations shall also not exceed 5 % during the total measurement.

5.3.4 Test patterns

5.3.4.1 SDR displays

The test patterns for SDR display devices such as mobile phones, tablet PCs, monitors, TVs and digital signage are shown in Figure 2. The test pattern for SDR displays is divided into two groups.

1) Test pattern for mobiles and tablet PC displays

In the case of mobiles and tablet PCs, the measurement distance between the display and the LMD depends on the size of the OLED display panels or modules. The measuring distance and the aperture angle may be adjusted to achieve a measuring field greater than 500 pixels if the setting of the measurement field angle is not applied. For display devices except monitors, TVs and digital signage, the test pattern with a white level at the 4 % window box located in the centre and a black level in the background, is used in Figure 2a).

2) Test pattern for monitors, TVs and digital signage displays

For monitors, TVs and digital signage, the test pattern is extracted by video analysis to reflect the characteristics of the video sample. For the test pattern, the maximum code value is allocated at the 4 % window box in the centre and the average code value is in the background. The examples of the maximum and average gray code values are shown in Table 1. The example of the test pattern is shown in Figure 2b). The maximum and average code values between 0 and 255 (in the case of 8 bits) could be extracted from the accumulating image for all frames of the video sample, which is converted as equivalent grayscale from each colour channel.

NOTE 1 Image sticking is influenced by the characteristics of the OLED displays [5], [7]. Some manufacturers of OLED displays apply various algorithms to optimize the quality of each device, and this also influences the image sticking. To consider the characteristics of an OLED display, the method in Annex A is used for the test pattern reflecting the characteristics of the OLED display.

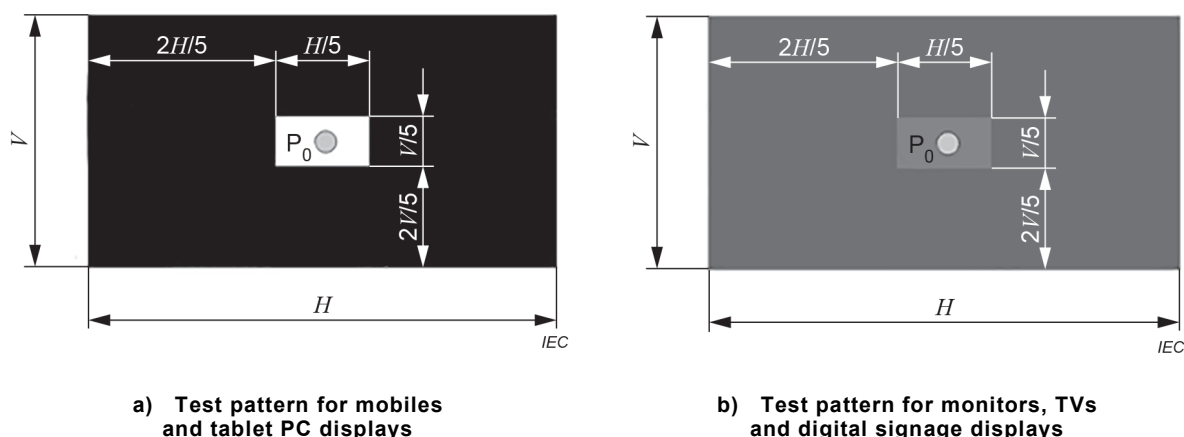


Figure 2 – Test pattern for SDR displays

Table 1 – Examples of maximum and average code value extracted from video samples

Examples of test video	Maximum code value	Average code value
IEC 62087:2011	107	84
Broadcast video sample	183	102

NOTE 2 For the test pattern, any video samples could be selected as needed. Table 1 shows two kinds of representative examples. The broadcast video sample example is constructed by considering the viewing ratio of the content of TV programmes based on the Korea broadcast media use environmental survey report: entertainment (30,9%), news (20,2 %), drama (16,8 %), and so on [4]. The average gray level and test pattern size are different between SDR and HDR in TVs. Depending on the purpose of the test, Figure 2b) or Figure 4a) would apply.

3) Measuring area

In order to get repeatability of measurement, the measuring area from P_0 to P_4 for displays is set to consider the uniformity of the OLED display panels or modules, as shown in Figure 3. If the centre window size is changed, then it should be reported in Table 2.

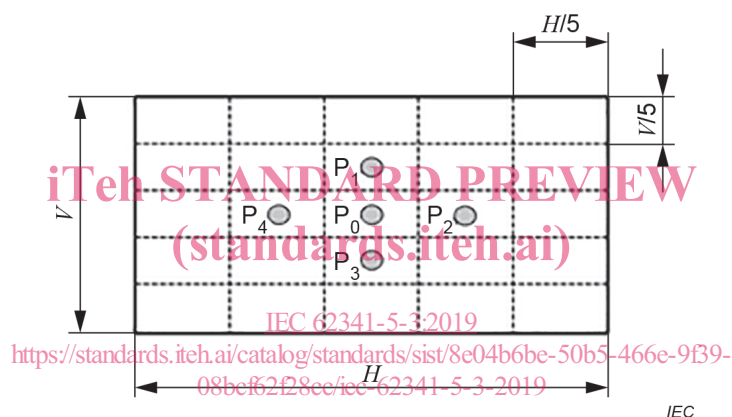


Figure 3 – Image sticking measuring area

4) Checking the test pattern

For SDR displays, the output luminance can be different although they have the same digital code value inputs. To check the brief information of the selected test pattern, the output luminance for the test pattern should be measured and reported.

Apply the test pattern on OLED displays and measure the output luminance on the measuring area from P_0 to P_4 as shown in Figure 3. The results of the output luminance of the test pattern should be reported in Table 2.

5.3.4.2 HDR displays

In 5.3.4.1, the test pattern for SDR displays is described. The test pattern for HDR displays is shown in Figure 4a). It is based on the PQ curve and 10 bits. The test pattern for HDR displays is proposed separately because the characteristics of the contents of the SDR and HDR are different. The test pattern for SDR or HDR can be used as needed. The background code value should be 510. The size of the box window should be 10 %, which is located in the centre. The code value of the 10 % box window should be 710. The measured luminance of the box window and the background luminance should be reported. To get repeatability of the measurement data, the measuring area from P_0 to P_4 is the centre of the boxes, as shown in Figure 4b). The measurement data should be reported in Table 2.