



# SLOVENSKI STANDARD

## SIST EN 60728-11:2018

01-februar-2018

Nadomešča:  
SIST EN 60728-11:2011

---

**Kabelska omrežja za televizijske in zvokovne signale ter interaktivne storitve - 11.  
del: Varnost**

Cable networks for television signals, sound signals and interactive services - Part 11:  
Safety

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

Réseaux cablés pour les signaux de télévision, les signaux sonores et les services  
interactifs - Partie 11: Sécurité

[SIST EN 60728-11:2018  
https://standards.iteh.ai/catalog/standards/sist/9bf5acd9-44d7-4bcf-afb4-  
3e77c26a074a/sist-en-60728-11-2018](https://standards.iteh.ai/catalog/standards/sist/9bf5acd9-44d7-4bcf-afb4-3e77c26a074a/sist-en-60728-11-2018)

**Ta slovenski standard je istoveten z: EN 60728-11:2017**

---

**ICS:**

33.060.40      Kabelski razdelilni sistemi      Cabled distribution systems

**SIST EN 60728-11:2018**

**en,fr,de**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST EN 60728-11:2018

<https://standards.iteh.ai/catalog/standards/sist/9bf5acd9-44d7-4bcf-afb4-3e77c26a074a/sist-en-60728-11-2018>

EUROPEAN STANDARD  
NORME EUROPÉENNE  
EUROPÄISCHE NORM

**EN 60728-11**

May 2017

ICS 33.060.40

Supersedes EN 60728-11:2010

English Version

**Cable networks for television signals, sound signals  
and interactive services -  
Part 11: Safety  
(IEC 60728-11:2016 + COR1:2016)**

Réseaux de distribution par câbles pour signaux de  
télévision, signaux de radiodiffusion sonore et services  
interactifs -  
Partie 11: Sécurité  
(IEC 60728-11:2016 + COR1:2016)

Kabelnetze für Fernsehsignale, Tonsignale und interaktive  
Dienste -  
Teil 11: Sicherheitsanforderungen  
(IEC 60728-11:2016 + COR1:2016)

This European Standard was approved by CENELEC on 2016-04-28. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the CEN-CENELEC Management Centre or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the CEN-CENELEC Management Centre has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Bulgaria, Croatia, Cyprus, the Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, the Netherlands, Norway, Poland, Portugal, Romania, Serbia, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and the United Kingdom.



European Committee for Electrotechnical Standardization  
Comité Européen de Normalisation Electrotechnique  
Europäisches Komitee für Elektrotechnische Normung

**CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels**

**EN 60728-11:2017****European foreword**

The text of document 100/2592/FDIS, future edition 4 of IEC 60728-11 prepared by Technical Area 5 “Cable networks for television signals, sound signals and interactive services” of IEC/TC 100 “Audio, video and multimedia systems and equipment” was submitted to the IEC-CENELEC parallel vote and approved by CENELEC as EN 60728-11:2017.

The following dates are fixed:

- latest date by which the document has to be (dop) 2017-11-26  
implemented at national level by  
publication of an identical national  
standard or by endorsement
- latest date by which the national (dow) 2020-05-26  
standards conflicting with the  
document have to be withdrawn

This document supersedes EN 60728-11:2010.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CENELEC shall not be held responsible for identifying any or all such patent rights.

For this European Standard the informative Annex C of IEC 60728-11:2016 shall be disregarded and has been replaced by the Annexes ZB, A deviations and ZC, Special National Conditions.

## iTeh STANDARD PREVIEW

### (standards.iteh.ai)

The text of the International Standard IEC 60728-11:2016 + COR1:2016 was approved by CENELEC as a European Standard without any modification.

<https://standards.iteh.ai/catalog/standards/sist/9bf5acd9-44d7-4bcf-afb4-11d1b31e0000/iec-60728-11-2016-cor1-2016>

In the official version, for Bibliography, the following notes have to be added for the standards indicated:

IEC 60364 Series	NOTE	Harmonized as HD 60364 Series.
IEC 60728-1	NOTE	Harmonized as EN 60728-1.

## Annex ZA (normative)

### Normative references to international publications with their corresponding European publications

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

NOTE 1 When an International Publication has been modified by common modifications, indicated by (mod), the relevant EN/HD applies.

NOTE 2 Up-to-date information on the latest versions of the European Standards listed in this annex is available here: [www.cenelec.eu](http://www.cenelec.eu)

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
-	-	Coaxial cables	EN 50117	Series
-	-	Lightning Protection Components (LPC) - Part 1: Requirements for connection components	EN 50164-1	-
-	-	Lightning Protection Components (LPC) - Part 2: Requirements for conductors and earth electrodes	EN 50164-2	-
-	-	Information technology - Cabling installation - Part 2: Installation planning and practices inside buildings	EN 50174-2	-
-	-	Telecommunications bonding networks for buildings and other structures	EN 50310	-
IEC 60065 (mod)	2014	Audio, video and similar electronic apparatus - Safety requirements	EN 60065	2014
IEC 60364-1	-	Low-voltage electrical installations - Part 1: Fundamental principles, assessment of general characteristics, definitions	HD 60364-1	-
IEC 60364-4-44	-	Low-voltage electrical installations - Part 4-44: Protection for safety - Protection against voltage disturbances and electromagnetic disturbances	HD 60364-4-442	-
IEC 60364-5-52	-	Low-voltage electrical installations - Part 5-52: Selection and erection of electrical equipment - Wiring systems	HD 60364-5-52	-
IEC 60364-5-54	-	Low-voltage electrical installations - Part 5-54: Selection and erection of electrical equipment - Earthing arrangements and protective conductors	HD 60364-5-54	-

## EN 60728-11:2017

<u>Publication</u>	<u>Year</u>	<u>Title</u>	<u>EN/HD</u>	<u>Year</u>
IEC 60529	-	Degrees of protection provided by enclosures (IP Code)	EN 60529	-
IEC 60728-2	-	Cable networks for television signals, sound signals and interactive services - Part 2: Electromagnetic compatibility for equipment	EN 50083-2	-
IEC 60825-1	-	Safety of laser products - Part 1: Equipment classification and requirements	EN 60825-1	-
IEC 60825-2	-	Safety of laser products - Part 2: Safety of optical fibre communication systems (OFCS)	EN 60825-2	-
IEC 60950-1 (mod)	2005	Information technology equipment - Safety - Part 1: General requirements	EN 60950-1	2006
			+A11	2009
			+A12	2011
			+AC	2011
IEC 60990	-	Methods of measurement of touch current and protective conductor current	EN 60990	-
IEC 61140	2001	Protection against electric shock - Common aspects for installation and equipment	EN 61140	2002 <sup>1)</sup>
+A1 (mod)	2004		+A1	2006 <sup>1)</sup>
IEC 62305	Series	Protection against lightning	EN 62305	Series
IEC 62305-2 (mod)	2010	Protection against lightning - Part 2: Risk management	EN 62305-2	2012
IEC 62305-3 (mod)	2010	Protection against lightning - Part 3: Physical damage to structures and life hazard	EN 62305-3	2011
IEC 62305-4 (mod)	2010	Protection against lightning - Part 4: Electrical and electronic systems within structures	EN 62305-4	2011
ISO 3864-1	2011	Graphical symbols - Safety colours and safety signs - Part 1: Design principles for safety signs and safety markings	-	-

<sup>1)</sup> Superseded by EN 61140:2016 (IEC 61140:2016): DOW = 2019-05-27.

## Annex ZB (informative)

### A-deviations

**A-deviation:** National deviation due to regulations, the alteration of which is for the time being outside the competence of the CENELEC national member.

This European Standard does not fall under any Directive of the EU.

In the relevant CEN-CENELEC countries, these A-deviations are valid instead of the provisions of the European Standard until they have been removed.

<u>Clause</u>	<u>Deviation</u>
---------------	------------------

<b>9</b>	<b>ZB.1 France</b>
----------	--------------------

(Arrêté interministériel, 2 April 1991)

This regulation specifies, among many other parameters, the minimum distance between electric supply wires (isolated and not isolated, low-voltage and high-voltage) and any other installation (e.g. buildings, antennas, telecommunication lines, etc.).

The main clauses of this regulation which concern the cable networks are Clauses 12, 25, 26, 33, 33bis, 38, 49, 51, 52 and 63.

Clause 9 of this standard specifies distances of 10 mm (indoors) and 20 mm (outdoors) and this is not sufficient to cover overhead cables. As an example, the minimum distance between an overhead telecommunication line and an overhead low-voltage (up to 1 kV) electricity supply line shall be 1 m (Clause 33). This distance may be reduced under specified conditions (Clauses 51, 52 and 63).

This regulation specifies also the minimum distance from high-voltage lines. This distance varies from 1 m to 4 m depending on the voltage, on the isolation of the cable and on the location (built-up area or not) (Clauses 33 and 63).

<https://standards.iteh.ai/catalog/standards/sist/9bf5acd9-44d7-4bcf-afb4-5726a074a/sist-en-60728-11-2018>

<b>10.1</b>	<b>ZB.2 United Kingdom</b>
-------------	----------------------------

In the UK the use of fully isolated system outlets is obligatory.

<b>11</b>	<b>ZB.3 France</b>
-----------	--------------------

(NF C 15100 - Décret n° 84-74 du 26 janvier 1984 modifié)

The use of TT distribution systems with 300 mA differential switching is not compatible with the interconnection of the earthing of two different buildings.

## Annex ZC (normative)

### Special national conditions

**Special national condition:** National characteristic or practice that cannot be changed even over a long period, e.g. climatic conditions, electrical earthing conditions.

NOTE If it affects harmonization, it forms part of the European Standard.

For the countries in which the relevant special national conditions apply these provisions are normative, for other countries they are informative.

#### Clause Special National Condition

#### 6.2 ZC.1 Norway

The following parts of the standard are not applicable due to Special National Conditions:

- For new and rebuilt coaxial electronic communication networks the outer conductor of the coaxial cable leading into a building shall be galvanic and isolated from the outer conductor of the coaxial cable inside the building;
- Examples of installations inside buildings described in 6.2g, 6.2i, 6.2l and shown in Figure 2, Figure 4, Figure 5 and Figure 7 shall be equipped with a galvanic isolator separating local earth from the cable network distribution lines;
- Galvanic isolators shall withstand the following requirements:
- Applying a 50 Hz AC voltage of 300 V<sub>RMS</sub> between the input and the output of the outer conductor of the galvanic isolator for a period of not less than 20 min, the leakage current shall not exceed 8 mA<sub>RMS</sub>. Applying a continues DC voltage of 2 120 V between the input and the output of the outer conductor of the galvanic isolator for a period of not less than 1 min, the leakage current shall not exceed 0,7 mA.

It shall not be possible to touch metallic parts of the galvanic isolator when connected.


#### 6.3 ZC.2 Norway

##### ZC.2.1 Justification

In most parts of Norway, the AC mains power are built as an IT- or TT-network with a line-to-line voltage of 230 V (see Figure ZC.1).

These types of networks have no N-conductor, and the AC mains power is supplied to the equipment from two of the three line conductors (IEC 60950-1:2005, Annex V).



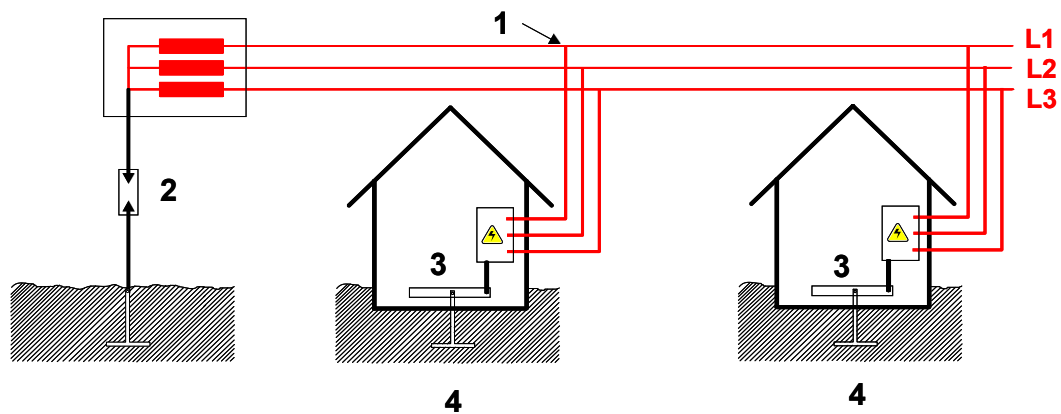

1 AC power distribution, IT system, line-to-line voltage 230 V	2 Voltage limiter
3 Equipotential bonding bar	4 Earth electrode

**Figure ZC.1 – IT power distribution system in Norway**

For a cable network covering an area with this type of power supply networks, special initiative should be taken to ensure that safety in the cable network is maintained. The following equipotential bonding arrangements described will provide necessary safety in such a network.


## **ZC.2.2 Equipotential bonding mechanism for cable networks**

### **ZC.2.2.1 Installations in the vicinity of transformer stations**

Any earth electrode in a cable network shall preferably be located at a minimum distance of 20 m from the nearest earth electrode in a high-power transformer station (high to mains voltage) (see Figure ZC.2 and ITU-T K.8 or EN 50174-3).


If the above-mentioned distance is less than 20 m, all equipment in the cable network shall be electrically isolated from local earth by mounting the equipment within a non-metallic enclosure, as shown in Figure ZC.3. Mains powered equipment with local power feeding should not be used in this case.

Before any work on the installation is started, measurements shall be carried out to reveal if there are any hazardous voltages between local earth and the earth for the cable network.

The safety sign "Warning about hazardous electrical voltage"  according to sign 7.4 of ISO 3864-1:2002 shall be attached to the non-metallic enclosure.


### **ZC.2.2.2 Cabinets for cable networks located near cabinets/ installations for mains**

Cabinets for cable networks placed together with cabinets for mains power distributions should preferably be placed at a minimum of 2 m apart. If the distance is closer than 2 m, a common earth electrode between the cabinets shall be used. Examples of such installations are shown in Figure ZC.4, Figure ZC.5, Figure ZC.6 and Figure ZC.7.

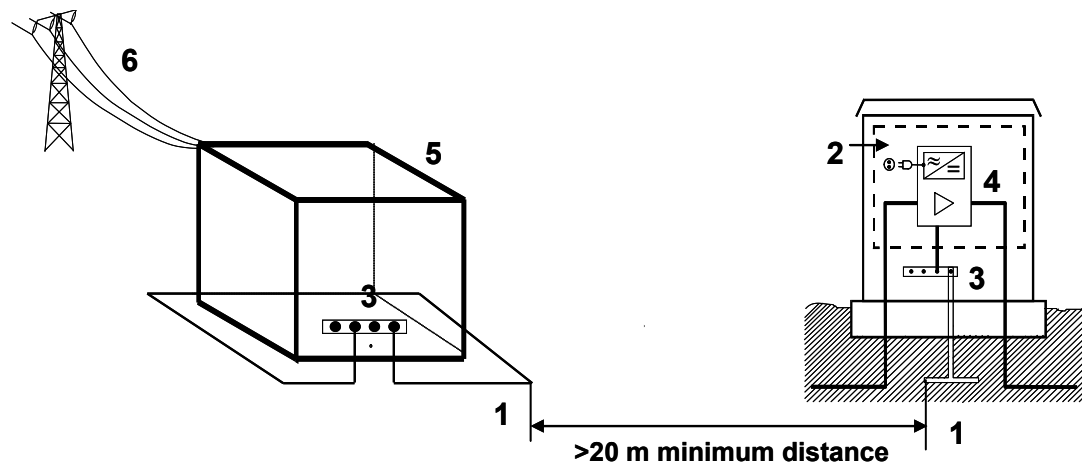


1 Earth electrode	2 Non-metallic enclosure
3 Equipotential bonding bar	4 Mains supplied equipment
5 Transforming station	6 High-voltage power transmission system

**Figure ZC.2 – Example of installations located farther than 20 m away from a transforming station**

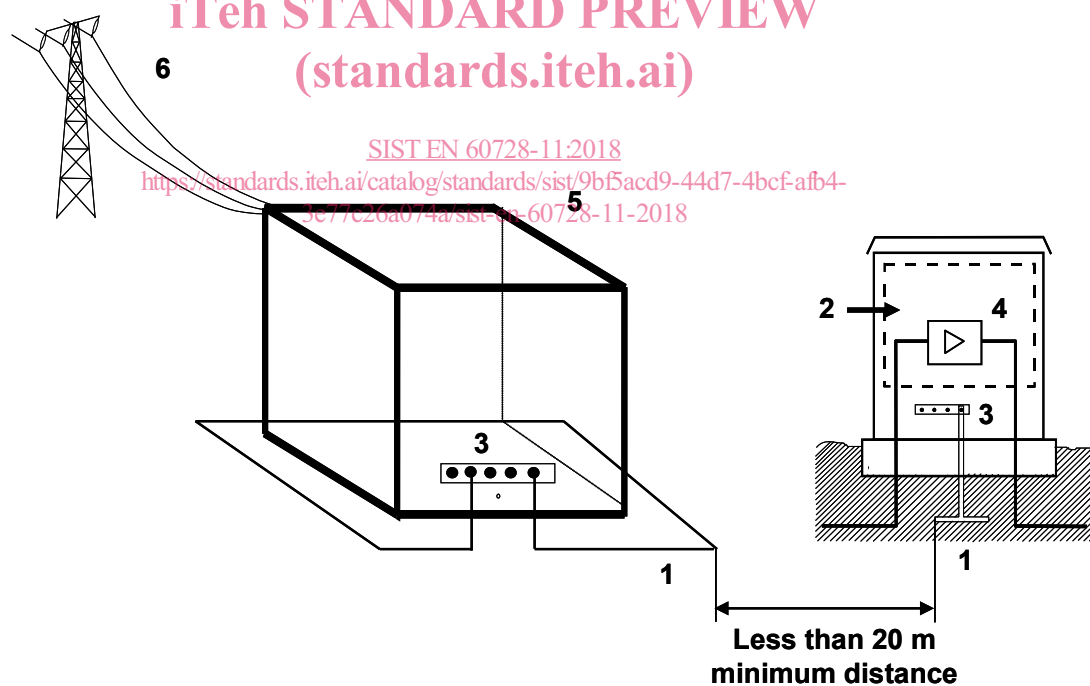

1 Earth electrode	2 Non-metallic enclosure
3 Equipotential bonding bar	4 Remotely supplied equipment
5 Transforming station	6 High-voltage power transmission system


**Figure ZC.3 – Example of installations located closer than 20 m from a transforming station**

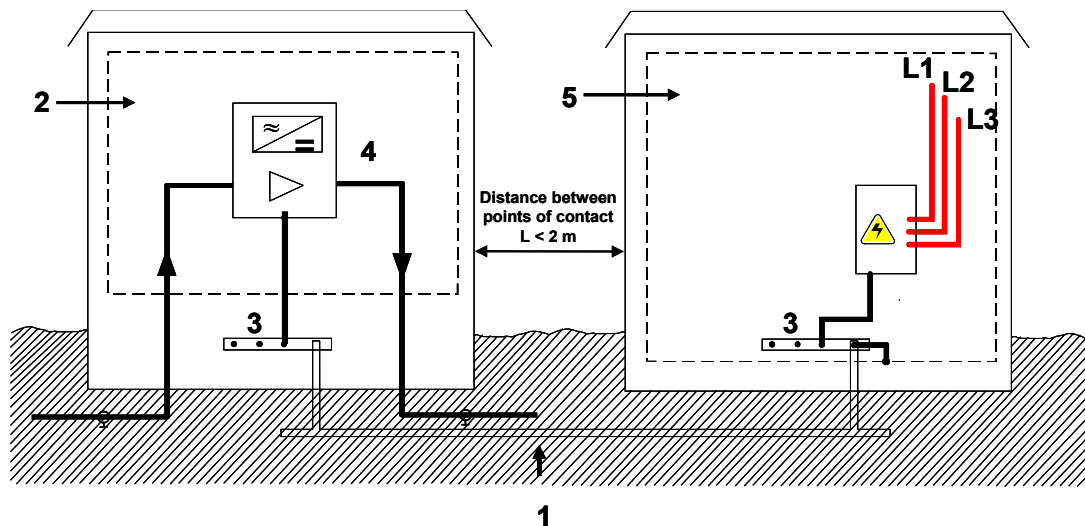

1 Common earth electrode	2 Non-metallic enclosure
3 Equipotential bonding bar	4 Mains supplied equipment
5 Metallic enclosure	


Figure ZC.4 – Example of cabinets for cable network with locally fed equipment and mains placed less than 2 m apart

iTeh STANDARD PREVIEW  
(standards.itech.ai)

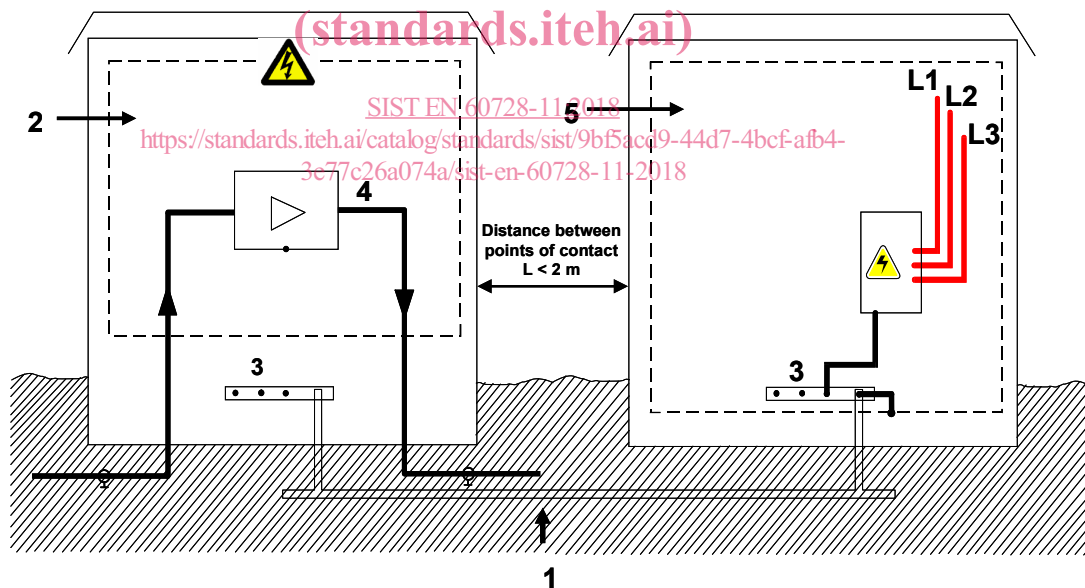


1 Common earth electrode	2 Non-metallic enclosure
3 Equipotential bonding bar	4 Remotely supplied equipment
5 Metallic enclosure	

Figure ZC.5 – Example of cabinets for cable network with remotely fed equipment and mains placed less than 2 m apart

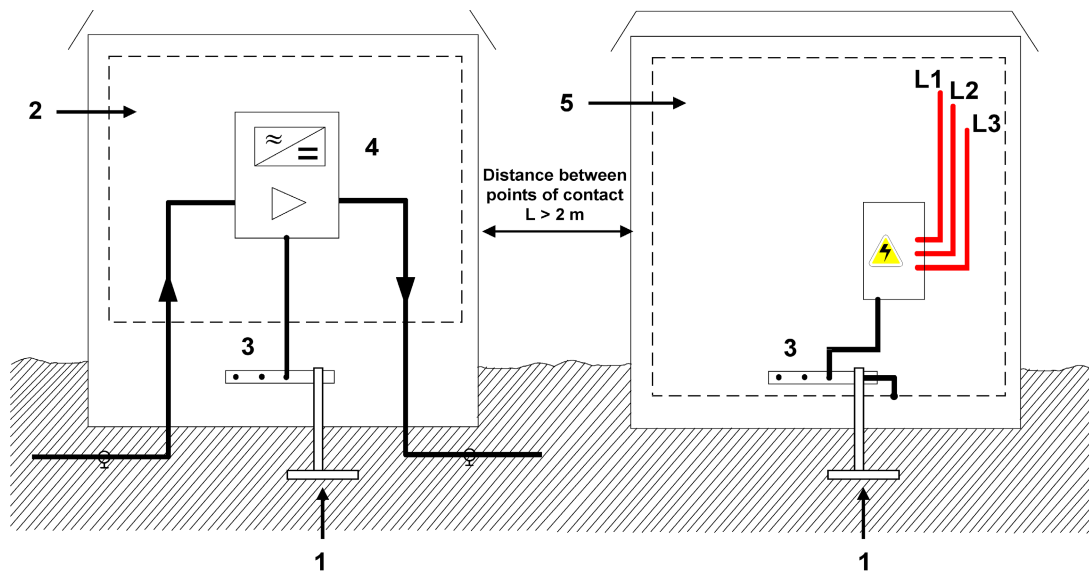

1 Earth electrode	2 Non-metallic enclosure
3 Equipotential bonding bar	4 Mains supplied equipment
5 Metallic enclosure	

Figure ZC.6 – Example of cabinets for cable network with locally fed equipment and mains placed more than 2 m apart

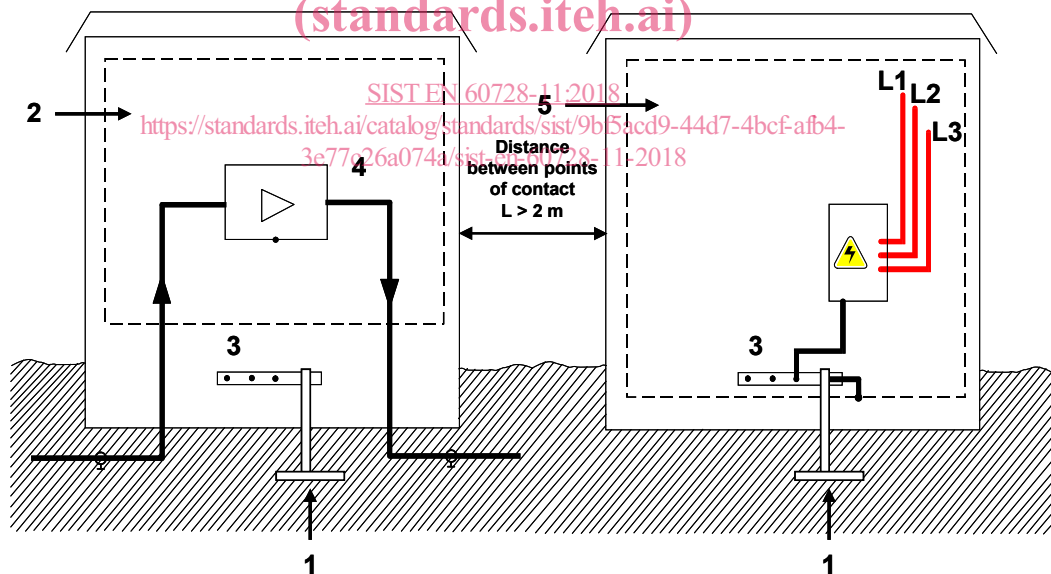


1 Earth electrode	2 Non-metallic enclosure
3 Equipotential bonding bar	4 Remotely supplied equipment
5 Metallic enclosure	

Figure ZC.7 – Example of cabinets for cable network with remotely fed equipment and mains placed more than 2 m apart

### ZC.2.3 Use of galvanic isolation in a cable network with remote power-feeding

When using galvanic isolation in cable networks with remote power feeding, the amplifier shall be placed in front of the galvanic isolator as shown in Figure ZC.8.

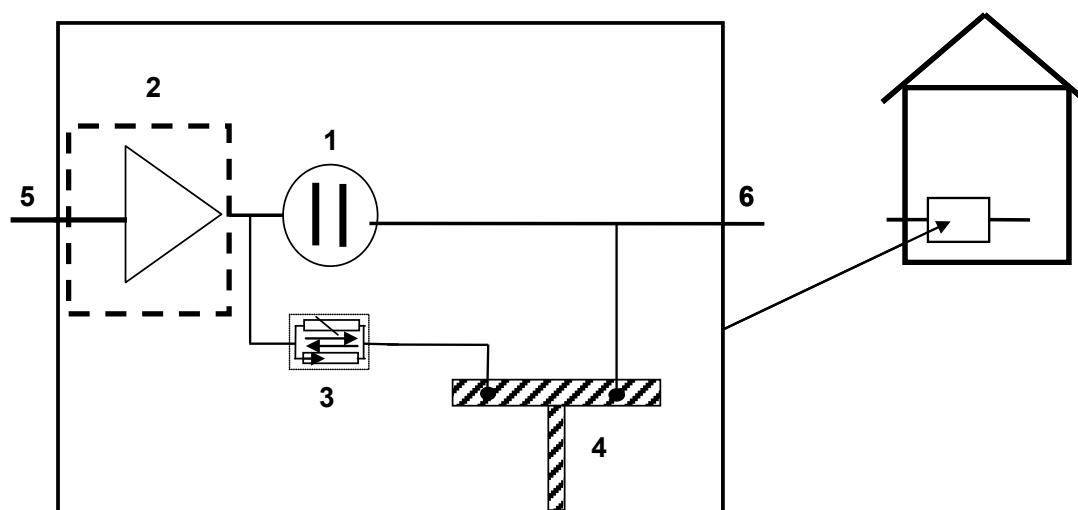

1 Galvanic isolator	2 Non-metallic enclosure
3 Voltage dependent protection device	4 Common earth electrode
5 CATV system	6 House internal cable-TV network

**Figure ZC.8 – Example of an installation placing the amplifier in front of the galvanic isolator**

A voltage dependent protective device is recommended in order to protect the galvanic isolator from transient voltages.

The amplifier shall be electrically isolated from the local electrical earth. In case the amplifier is mounted close to either local electrical earth or installations connected to local electrical earth, the amplifier shall be placed in such a way that it is not possible to physically touch both the amplifier and the installation without having to remove a cover or other safety arrangements. The covers and amplifiers shall be labelled with the safety sign given under ZC.2.2.1. The covers used shall be designed in such a way that they can only be removed using a key or a special tool.

### ZC.2.4 Use of voltage dependent protective device in a cable network

Network, property and health shall be protected against failure in isolation between infrastructures with different levels of voltage and other unwanted high voltages caused by any kind of high voltage distribution networks or atmospheric discharges.

Depending on the voltages time span, all voltages with local earth as a reference shall be limited according to following values:


0 to 200 ms	1 030 V
201 to 350 ms	780 V
351 to 500 ms	650 V
501 to 1 000 ms	430 V
1 001 to 2 000 ms	300 V
2 001 to 3 000 ms	250 V

3 001 to 5 000 ms	200 V
5 001 to 10 000 ms	150 V
More than 10 000 ms	60 V

In Norway, network installations with no mains supplied equipment are usually installed isolated from local earth due to difficult ground conditions. When calculations show that the voltage level will rise above 650 V, measures must be taken to reduce the voltage level. This can be done by connecting a voltage dependent device between the network installation and local earth. The voltage dependent device must not connect the installations to local earth in case of a short circuit in mains power.

This implies a safe threshold voltage of 420 V.

Examples of protections using a voltage depending device are shown in Figure 3 and Figure ZC.9.

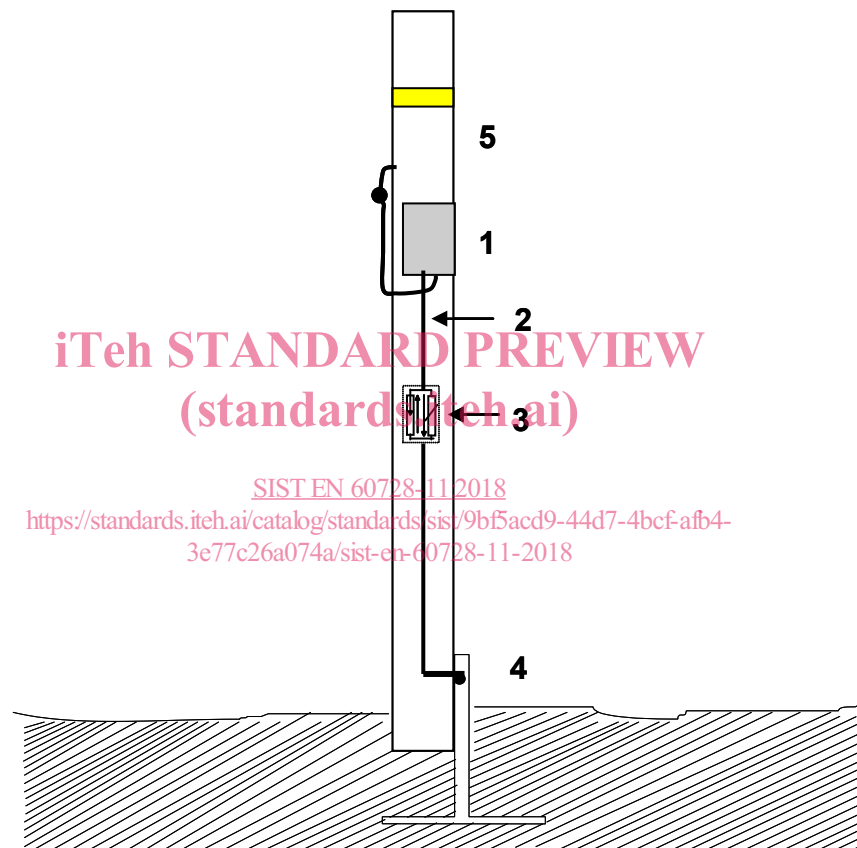

1 Amplifier / passive equipment	2 Equipotential bonding conductor
3 Voltage dependent protection device	4 Common earth electrode
5 Pylon	

**Figure ZC.9 – Example of protection using a voltage depending device on network installations on poles**

### 12.3 ZC.3 Finland

The required wind pressure value is 700 N/m<sup>2</sup> for buildings up to 30 m.



IEC 60728-11

Edition 4.0 2016-03

# INTERNATIONAL STANDARD

## NORME INTERNATIONALE



**Cable networks for television signals, sound signals and interactive services –  
Part 11: Safety**

(standards.iteh.ai)

**Réseaux de distribution par câbles pour signaux de télévision, signaux de  
radiodiffusion sonore et services interactifs –  
Partie 11: Sécurité**

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

COMMISSION  
ELECTROTECHNIQUE  
INTERNATIONALE

ICS 33.060.40

ISBN 978-2-8322-3161-6

**Warning! Make sure that you obtained this publication from an authorized distributor.  
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**