



**SLOVENSKI STANDARD**  
**oSIST prEN ISO 14571:2022**  
**01-september-2022**

---

**Kovinske prevleke na materialih z nekovinsko osnovo - Merjenje debeline prevleke - Metoda mikroupornosti (ISO 14571:2020)**

Metallic coatings on non-metallic basis materials - Measurement of coating thickness - Micro-resistivity method (ISO 14571:2020)

Metallische Überzüge auf nichtmetallischen Grundwerkstoffen - Schichtdickenmessung - Mikro-Widerstand-Verfahren (ISO 14571:2020)

Revêtements métalliques sur matériaux non-métalliques - Mesurage de l'épaisseur des revêtements - Méthode utilisant la micro-résistivité (ISO 14571:2020)

**Ta slovenski standard je istoveten z: prEN ISO 14571**

---

**ICS:**

17.040.20	Lastnosti površin	Properties of surfaces
25.220.40	Kovinske prevleke	Metallic coatings

**oSIST prEN ISO 14571:2022**

**en,fr,de**



INTERNATIONAL  
STANDARD

ISO  
14571

First edition  
2020-11

---

---

**Metallic coatings on non-metallic basis  
materials — Measurement of coating  
thickness — Micro-resistivity method**

*Revêtements métalliques sur matériaux non-métalliques — Mesurage  
de l'épaisseur des revêtements — Méthode utilisant la micro-  
résistivité*

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

[oSIST prEN ISO 14571:2022](https://standards.iteh.ai/catalog/standards/sist/90c3828c-9a24-4022-88c2-b6a38c999035/osist-pren-iso-14571-2022)

[https://standards.iteh.ai/catalog/standards/sist/90c3828c-9a24-4022-88c2-  
b6a38c999035/osist-pren-iso-14571-2022](https://standards.iteh.ai/catalog/standards/sist/90c3828c-9a24-4022-88c2-b6a38c999035/osist-pren-iso-14571-2022)



Reference number  
ISO 14571:2020(E)

© ISO 2020

# iTeh STANDARD PREVIEW (standards.iteh.ai)

[oSIST prEN ISO 14571:2022](https://standards.iteh.ai/catalog/standards/sist/90c3828c-9a24-4022-88c2-b6a38c999035/osist-pren-iso-14571-2022)

<https://standards.iteh.ai/catalog/standards/sist/90c3828c-9a24-4022-88c2-b6a38c999035/osist-pren-iso-14571-2022>



## **COPYRIGHT PROTECTED DOCUMENT**

© ISO 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

	Page
<b>Foreword</b> .....	<b>iv</b>
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative references</b> .....	<b>1</b>
<b>3 Terms and definitions</b> .....	<b>1</b>
<b>4 Measurement principle</b> .....	<b>1</b>
<b>5 Factors affecting measurement uncertainty</b> .....	<b>4</b>
5.1 Range of measurement.....	4
5.2 Coating resistivity.....	4
5.3 Width of the sample.....	4
5.4 Curvature.....	5
5.5 Surface roughness.....	5
5.6 Temperature.....	5
5.7 Probe contact pressure.....	5
<b>6 Calibration of instruments</b> .....	<b>5</b>
6.1 General.....	5
6.2 Calibration standards.....	6
6.3 Verification.....	6
<b>7 Procedure</b> .....	<b>6</b>
7.1 General.....	6
7.2 Width of the sample.....	6
7.3 Curvature.....	6
7.4 Number of measurements.....	6
7.5 Surface cleanliness.....	7
<b>8 Accuracy requirements</b> .....	<b>7</b>
<b>9 Test report</b> .....	<b>7</b>
<b>Annex A (informative) Method for determining the critical current path width</b> .....	<b>8</b>
<b>Bibliography</b> .....	<b>9</b>

## ISO 14571:2020(E)

### Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 107, *Metallic and other inorganic coatings*, in collaboration with the European Committee for Standardization (CEN) Technical Committee CEN/TC 262, *Metallic and other inorganic coatings, including for corrosion protection and corrosion testing of metals and alloys*, in accordance with the Agreement on technical cooperation between ISO and CEN (Vienna Agreement).

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

# Metallic coatings on non-metallic basis materials — Measurement of coating thickness — Micro-resistivity method

## 1 Scope

This document specifies a method for non-destructive measurements of the thickness of conductive coatings on non-conductive base materials. This method is based on the principle of the sheet resistivity measurement and is applicable to any conductive coatings and layers of metal and semiconductor materials. In general, the probe has to be adjusted to the conductivity and the thickness of the respective application. However, this document focuses on metallic coatings on non-conductive base materials (e.g. copper on plastic substrates, printed circuit boards).

This method is also applicable to thickness measurements of conductive coatings on conductive base materials, if the resistivity of the coating and the base material is significantly different. However, this case is not considered in this document.

## 2 Normative references

There are no normative references in this document.

## 3 Terms and definitions

No terms and definitions are listed in this document.


ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

## 4 Measurement principle

The sheet resistivity method uses the so-called “four-point probe” as shown in [Figure 1](#). A row of four spring-loaded metal tips are placed in contact with the surface of the conductive coating. The tip distances between the outer and inner tips,  $S_1$  and  $S_3$ , are equal. Usually, a constant current is passed through the two outer contacts (labelled as 1). The introduced current penetrates the conductive material of the coating with the resistivity  $\rho$ . The resulting voltage drop is measured across the two inner contacts (labelled as 2).


In general, the flow of the introduced current is non-uniformly distributed over the cross-section of the coating and is not parallel to the coating (see [Figure 2](#)). The current density decreases with increasing distance from the direct line between the outer contacts labelled as 1 (with depth and width). If the current is effectively limited by the thickness of the coating, the voltage drop between the inner contacts labelled as 2 is a measure of the thickness.

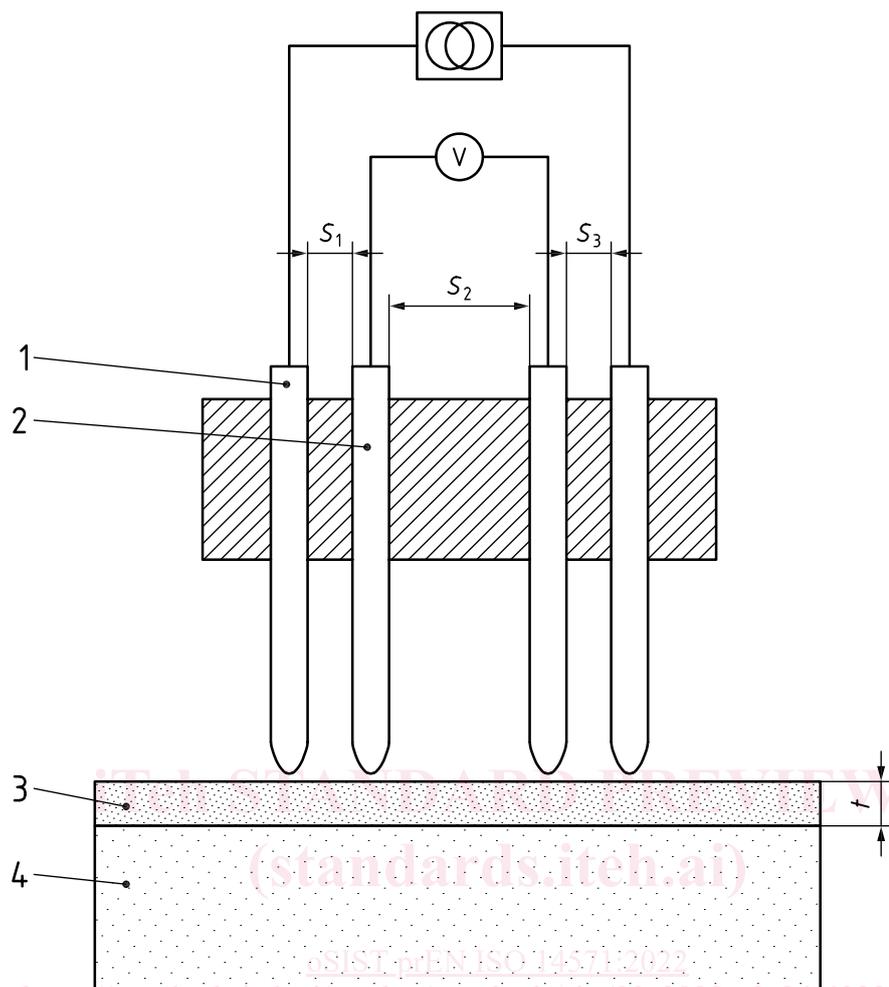

**Key**

- 1 outer contacts of the probe
- 2 inner contacts of the probe
- 3 conductive coating
- 4 non-conductive base material
- $t$  coating thickness

**Figure 1 — Schematic representation of the sheet resistivity method**

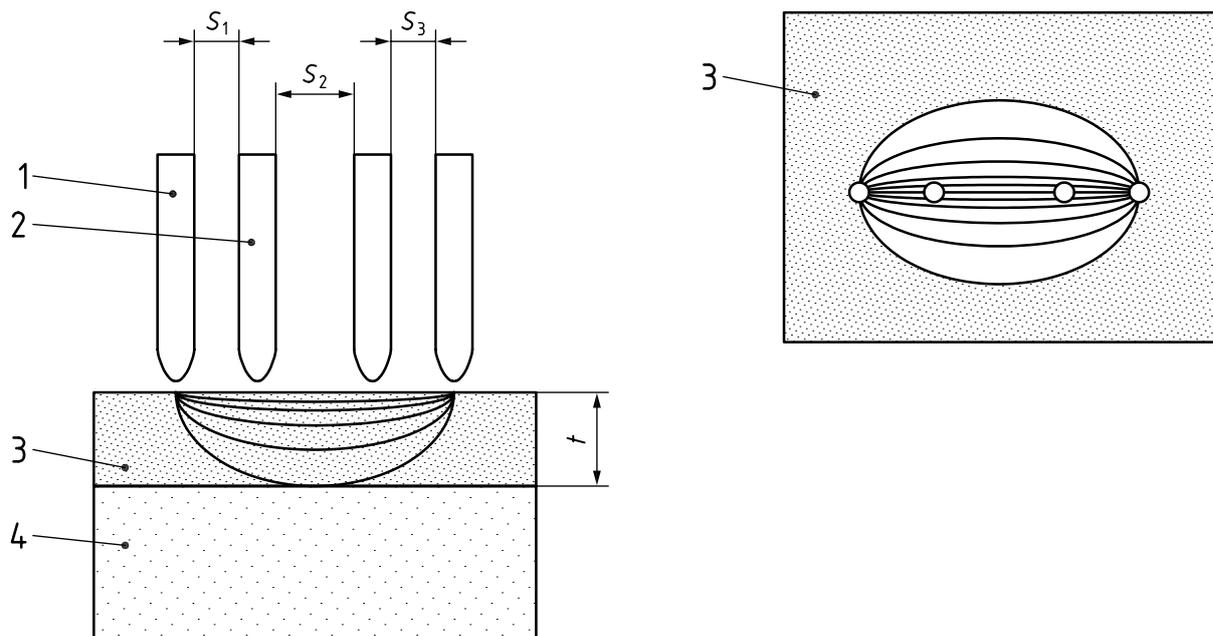

**Key**

- 1 outer contacts of the probe
- 2 inner contacts of the probe
- 3 conductive coating
- 4 non-conductive base material
- t* coating thickness

**Figure 2 — Schematic representation of the non-uniformly distributed current within the coating**

The measured voltage drop depends on the resistivity of the metallic coating, on the probe geometry (distance of the four probe contacts  $S_1, S_2, S_3$ ), the applied current and the thickness of the coating. If the resistivity of the coating can be expected to be homogenous and the thickness is sufficiently small, the measured voltage drop is determined only by the unknown thickness and the applied current. In general, there is no simple and practical equation to calculate the thickness as a function of the material resistivity, the probe geometry and the measured voltage and current. However, there are some well-known approximations for practical use in certain cases. Particularly in the case of equal tip distances ( $S_1 = S_2 = S_3 = S$ ) and for a thickness to probe spacing ratio  $t/S < 0,5$ , the coating thickness,  $t$ , in micrometres, can be calculated using [Formula \(1\)](#), when  $t/S < 0,5$ :

$$t = \rho \frac{I \ln(2)}{V \pi} \tag{1}$$

where

- $\rho$  is the resistivity of the coating, in  $\mu\Omega \cdot m$ ;
- $V$  is the potential difference across the inner probe tips, in volts;
- $I$  is the current passed through the outer probe tips, in amperes;
- $S$  is the equal probe tip spacing ( $S = S_1 = S_2 = S_3$ ).

**ISO 14571:2020(E)**

Usually the supplied current  $I$  is held constant. Therefore, the coating thickness is inversely proportional to the measured voltage:

$$t = \frac{C}{V} \quad (2)$$

where  $C$  is a constant  $0,221 \rho l$ .

[Formula \(2\)](#) is the basis for many applications in the above case. In general, suitable correction functions for [Formula \(2\)](#) are necessary if the prerequisite of a ratio  $t/S < 0,5$  or an equal probe tip spacing is not satisfied.

Because the introduced current decreases with increasing penetration depth, a sufficiently thick coating does not limit the current and the coating appears to be of infinite thickness to this method. The wider the probe spacing the deeper the current penetrates into the conductive material. Consequently, the measurement range is determined by the probe spacing for a given coating material. The probe geometry (tip spacing) has to be adjusted with respect to the conductivity and the expected thickness range of the application of interest. Furthermore, the sensitivity of this method decreases with increasing thickness.

The application of [Formula \(2\)](#) is also limited by very thin coatings because the resistivity is expected to be constant and not a function of the thickness. However, for very thin coatings, the resistivity starts to increase and below a critical thickness this increase of the resistivity is strongly pronounced. Typical values of this critical thickness are in the range of approximately 10 nm to 300 nm for metals. For measurements in this range and below this critical thickness, a special calibration or additional correction functions are necessary.

Because the introduced current decreases with increasing distance from the contacts of the probe, the current flow is not affected by a sample width wider than a critical width. Therefore, the sample width has to be wider than this critical width. Otherwise, the measured thickness becomes a function of the sample width and the sample width has to be considered in addition. The probe spacing also determines the value of the critical width for a given coating material.

## 5 Factors affecting measurement uncertainty

### 5.1 Range of measurement

The measurable thickness range is determined by the probe geometry (tip distance) and the conductivity of the coating. The probe geometry has to be adjusted to the thickness range of interest.

Usually the manufacturer provides the uncertainty of the respective probe for the recommended thickness range.

### 5.2 Coating resistivity

Measurements will be affected by the resistivity of the coating if the resistivity of the coating differs from the resistivity of the calibration standard(s) used to calibrate the instrument. A 5 % difference in resistivity will result in a 5 % error unless this difference is accounted for in the calibration procedure.

Furthermore, a homogenous resistivity throughout the coating is expected for this method. The measurement will be affected by a resistivity variation of the coating. This can be caused by composition variation of the coating, by coating defects (e.g. cracks, porosity, voids, inclusions) or by a surface preparation or contamination.

### 5.3 Width of the sample

Below a critical width, determined by probe design (tip spacing) and to a lesser degree on the electrical conductivity of the metallic coating, the coating thickness measurement becomes dependent upon