



SLOVENSKI STANDARD

SIST EN 300 909 V6.2.1:2003

01-december-2003

8 [[[HJb]`W] b]`h`Y_ca i b]_UW`g_]`g]ghYa `fZuU&ZL`E`?cX]fUb`Y`_UbUcj `f} GA
\$) '\$' žfUh`]]WU* "&%'ž]nXUU% - +Ł

Digital cellular telecommunications system (Phase 2+) (GSM); Channel coding (GSM 05.03 version 6.2.1 Release 1997)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Ta slovenski standard je istoveten z: **EN 300 909 Version 6.2.1**

SIST EN 300 909 V6.2.1:2003
<https://standards.iteh.ai/catalog/standards/sist/777fd27-bc91-44dc-9f60-b8b152f699d0/sist-en-300-909-v6-2-1-2003>

ICS:

33.070.50	Globalni sistem za mobilno telekomunikacijo (GSM)	Global System for Mobile Communication (GSM)
-----------	---	--

SIST EN 300 909 V6.2.1:2003

en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 300 909 V6.2.1:2003](https://standards.iteh.ai/catalog/standards/sist/777ffd27-be91-44dc-9f60-b8b152f699d0/sist-en-300-909-v6-2-1-2003)

<https://standards.iteh.ai/catalog/standards/sist/777ffd27-be91-44dc-9f60-b8b152f699d0/sist-en-300-909-v6-2-1-2003>

EN 300 909 V6.2.1 (1999-08)

European Standard (Telecommunications series)

Digital cellular telecommunications system (Phase 2+); Channel coding (GSM 05.03 version 6.2.1 Release 1997)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

GSM®
GLOBAL SYSTEM FOR
MOBILE COMMUNICATIONS

[SIST EN 300 909 V6.2.1:2003](https://standards.iteh.ai/catalog/standards/sist/777fd27-be91-44dc-9f60-b8b152f99d0/sist-en-300-909-v6-2-1-2003)

<https://standards.iteh.ai/catalog/standards/sist/777fd27-be91-44dc-9f60-b8b152f99d0/sist-en-300-909-v6-2-1-2003>



Reference

REN/SMG-020503Q6R1 (8f0030oo.PDF)

Keywords

Digital cellular telecommunications system,
Global System for Mobile communications (GSM)

ETSI

Postal address

F-06921 Sophia Antipolis Cedex - FRANCE

Office address

650 Route des Lucioles - Sophia Antipolis
Valbonne - FRANCE

Tel.: +33 4 92 94 42 00 - Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C

Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

<https://standards.itsi.ai/catalog/standards/sist/777fd27-be91-44dc-9f60-b8b152f699d0/sist-en-300-909-v6-2-1-2003>

Internet

secretariat@etsi.fr

Individual copies of this ETSI deliverable
can be downloaded from

<http://www.etsi.org>

If you find errors in the present document, send your
comment to: editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1999.
All rights reserved.

Contents

Intellectual Property Rights.....	6
Foreword	6
1 Scope.....	7
1.1 References.....	7
1.2 Abbreviations.....	7
2 General	8
2.1 General organization.....	8
2.2 Naming Convention	10
3 Traffic Channels (TCH).....	10
3.1 Speech channel at full rate (TCH/FS and TCH/EFS).....	11
3.1.1 Preliminary channel coding for EFR only	11
3.1.1.1 CRC calculation.....	11
3.1.1.2 Repetition bits.....	11
3.1.1.3 Correspondence between input and output of preliminary channel coding	12
3.1.2 Channel coding for FR and EFR	12
3.1.2.1 Parity and tailing for a speech frame	12
3.1.2.2 Convolutional encoder.....	13
3.1.3 Interleaving	13
3.1.4 Mapping on a Burst.....	13
3.2 Speech channel at half rate (TCH/HS).....	13
3.2.1 Parity and tailing for a speech frame.....	14
3.2.2 Convolutional encoder	14
3.2.3 Interleaving	15
3.2.4 Mapping on a burst.....	15
3.3 Data channel at full rate, 12.0 kbit/s radio interface rate (9.6 kbit/s services (TCH/F9.6))	15
3.3.1 Interface with user unit.....	15
3.3.2 Block code	16
3.3.3 Convolutional encoder	16
3.3.4 Interleaving	16
3.3.5 Mapping on a Burst.....	16
3.4 Data channel at full rate, 6.0 kbit/s radio interface rate (4.8 kbit/s services (TCH/F4.8))	16
3.4.1 Interface with user unit.....	17
3.4.2 Block code	17
3.4.3 Convolutional encoder	17
3.4.4 Interleaving	17
3.4.5 Mapping on a Burst.....	17
3.5 Data channel at half rate, 6.0 kbit/s radio interface rate (4.8 kbit/s services (TCH/H4.8))	17
3.5.1 Interface with user unit.....	18
3.5.2 Block code	18
3.5.3 Convolutional encoder	18
3.5.4 Interleaving	18
3.5.5 Mapping on a Burst.....	18
3.6 Data channel at full rate, 3.6 kbit/s radio interface rate (2.4 kbit/s and less services (TCH/F2.4)).....	18
3.6.1 Interface with user unit.....	18
3.6.2 Block code	18
3.6.3 Convolutional encoder	18
3.6.4 Interleaving	19
3.6.5 Mapping on a Burst.....	19
3.7 Data channel at half rate, 3.6 kbit/s radio interface rate (2.4 kbit/s and less services (TCH/H2.4))	19
3.7.1 Interface with user unit.....	19
3.7.2 Block code	19
3.7.3 Convolutional encoder	19
3.7.4 Interleaving	19
3.7.5 Mapping on a Burst.....	19

3.8	Data channel at full rate, 14.5 kbit/s radio interface rate (14.4 kbit/s services (TCH/F14.4))	20
3.8.1	Interface with user unit	20
3.8.2	Block code	20
3.8.3	Convolutional encoder	20
3.8.4	Interleaving	20
3.8.5	Mapping on a Burst	20
4	Control Channels	21
4.1	Slow associated control channel (SACCH)	21
4.1.1	Block constitution	21
4.1.2	Block code	21
4.1.3	Convolutional encoder	21
4.1.4	Interleaving	22
4.1.5	Mapping on a Burst	22
4.2	Fast associated control channel at full rate (FACCH/F)	22
4.2.1	Block constitution	22
4.2.2	Block code	22
4.2.3	Convolutional encoder	22
4.2.4	Interleaving	22
4.2.5	Mapping on a Burst	22
4.3	Fast associated control channel at half rate (FACCH/H)	23
4.3.1	Block constitution	23
4.3.2	Block code	23
4.3.3	Convolutional encoder	23
4.3.4	Interleaving	23
4.3.5	Mapping on a Burst	24
4.4	Broadcast control, Paging, Access grant, Notification and Cell broadcast channels (BCCH, PCH, AGCH, NCH, CBCH)	24
4.5	Stand-alone dedicated control channel (SDCCH)	24
4.6	Random access channel (RACH)	25
4.7	Synchronization channel (SCH)	25
4.8	Access Burst on circuit switched channels other than RACH	26
4.9	Access Bursts for uplink access on a channel used for VGCS	26
5	Packet Switched Channels	26
5.1	Packet data traffic channel (PDTCH)	26
5.1.1	Packet data block type 1 (CS-1)	26
5.1.2	Packet data block type 2 (CS-2)	26
5.1.2.1	Block constitution	26
5.1.2.2	Block code	26
5.1.2.3	Convolutional encoder	27
5.1.2.4	Interleaving	27
5.1.2.5	Mapping on a burst	27
5.1.3	Packet data block type 3 (CS-3)	28
5.1.3.1	Block constitution	28
5.1.3.2	Block code	28
5.1.3.3	Convolutional encoder	28
5.1.3.4	Interleaving	29
5.1.3.5	Mapping on a burst	29
5.1.4	Packet data block type 4 (CS-4)	29
5.1.4.1	Block constitution	29
5.1.4.2	Block code	29
5.1.4.3	Convolutional encoder	29
5.1.4.4	Interleaving	30
5.1.4.5	Mapping on a burst	30
5.2	Packet control channels (PACCH, PBCCH, PAGCH, PPCH, PNCH, PTCCH)	30
5.3	Packet random access channel (PRACH)	30
5.3.1	Packet Access Burst	30
5.3.2	Extended Packet Access Burst	30
5.4	Access Burst on packet switched channels other than PRACH	31

Annex A (informative):	Summary of Channel Types	43
Annex B (informative):	Summary of Polynomials Used for Convolutional Codes.....	44
Annex C (informative):	Change Request History	45
History		46

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST EN 300 909 V6.2.1:2003

<https://standards.iteh.ai/catalog/standards/sist/777ffd27-be91-44dc-9f60-b8b152f699d0/sist-en-300-909-v6-2-1-2003>

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available **free of charge** from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://www.etsi.org/ipr>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by the Special Mobile Group (SMG).

The present document specifies the data blocks given to the encryption unit. It includes the specification of encoding, reordering, interleaving and the stealing flag within the digital cellular telecommunications system (Phase 2+).

The contents of the present document are subject to continuing work within SMG and may change following formal SMG approval. Should SMG modify the contents of the present document it will then be republished by ETSI with an identifying change of release date and an increase in version number as follows:

Version 6.x.y

where:

- 6 indicates release 1997 of GSM Phase 2+
- x the second digit is incremented for **changes of substance, i.e. technical enhancements, corrections, updates, etc**
- y the third digit is incremented when editorial only changes have been incorporated in the specification.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/777fd27-be91-44dc-9f60-b8b152f699d0/sist-en-300-909-v6-2-1-2003>

Proposed national transposition dates

Date of adoption of this EN:	6 August 1999
Date of latest announcement of this EN (doa):	30 November 1999
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 May 2000
Date of withdrawal of any conflicting National Standard (dow):	31 May 2000

1 Scope

A reference configuration of the transmission chain is shown in GSM 05.01 [4]. According to this reference configuration, the present document specifies the data blocks given to the encryption unit.

It includes the specification of encoding, reordering, interleaving and the stealing flag. It does not specify the channel decoding method.

The definition is given for each kind of logical channel, starting from the data provided to the channel encoder by the speech coder, the data terminal equipment, or the controller of the Mobile Station (MS) or Base Transceiver Station (BTS). The definitions of the logical channel types used in the present document are given in GSM 05.02 [5], a summary is in annex A.

1.1 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.

- [1] GSM 01.04: "Digital cellular telecommunications system (Phase 2+); Abbreviations and acronyms".
- [2] GSM 04.08: "Digital cellular telecommunications system (Phase 2+); Mobile radio interface layer 3 specification".
- [3] GSM 04.21: "Digital cellular telecommunications system (Phase 2+); Rate adaption on the Mobile Station - Base Station System (MS - BSS) interface".
- [4] GSM 05.01: "Digital cellular telecommunications system (Phase 2+); Physical layer on the radio path General description".
- [5] GSM 05.02: "Digital cellular telecommunications system (Phase 2+); Multiplexing and multiple access on the radio path".
- [6] GSM 05.05: "Digital cellular telecommunications system (Phase 2+); Radio Transmission and Reception".
- [7] GSM 06.10: "Digital cellular telecommunications system; Full rate speech transcoding".
- [8] GSM 06.20: "Digital cellular telecommunications system; Half rate speech transcoding".
- [9] GSM 06.60: "Digital cellular telecommunications system; Enhanced Full Rate (EFR) speech transcoding".
- [10] GSM 03.64: "Digital cellular telecommunications system (Phase 2+); General Packet Radio Service (GPRS); Overall description of the GPRS Radio Interface; Stage 2".

1.2 Abbreviations

Abbreviations used in the present document are listed in GSM 01.04.

2 General

2.1 General organization

Each channel has its own coding and interleaving scheme. However, the channel coding and interleaving is organized in such a way as to allow, as much as possible, a unified decoder structure.

Each channel uses the following sequence and order of operations:

- The information bits are coded with a systematic block code, building words of information + parity bits.
- These information + parity bits are encoded with a convolutional code, building the coded bits.
- Reordering and interleaving the coded bits, and adding a stealing flag, gives the interleaved bits.

All these operations are made block by block, the size of which depends on the channel. However, most of the channels use a block of 456 coded bits which is interleaved and mapped onto bursts in a very similar way for all of them. Figure 1 gives a diagram showing the general structure of the channel coding.

This block of 456 coded bits is the basic structure of the channel coding scheme. In the case of full rate speech TCH, this block carries the information of one speech frame. In case of control channels, it carries one message.

In the case of half rate speech TCH, the information of one speech frame is carried in a block of 228 coded bits.

In the case of the Enhanced full rate speech the information bits coming out of the source codec first go through a preliminary channel coding, then the channel coding as described above takes place.

In the case of a packet switched channel the block of 456 coded bits carries one radio block.

In the case of FACCH, a coded message block of 456 bits is divided into eight sub-blocks. The first four sub-blocks are sent by stealing the even numbered bits of four timeslots in consecutive frames used for the TCH. The other four sub-blocks are sent by stealing the odd numbered bits of the relevant timeslot in four consecutive used frames delayed 2 or 4 frames relative to the first frame. Along with each block of 456 coded bits there is, in addition, a stealing flag (8 bits), indicating whether the block belongs to the TCH or to the FACCH. In the case of SACCH, BCCH or CCCH, this stealing flag is dummy. In the case of a packet switched channel, these bits are used to indicate the coding scheme used.

Some cases do not fit in the general organization, and use short blocks of coded bits which are sent completely in one timeslot. They are the random access messages of

- the RACH
- or PRACH

on uplink and the synchronization information broadcast of the SCH on downlink.

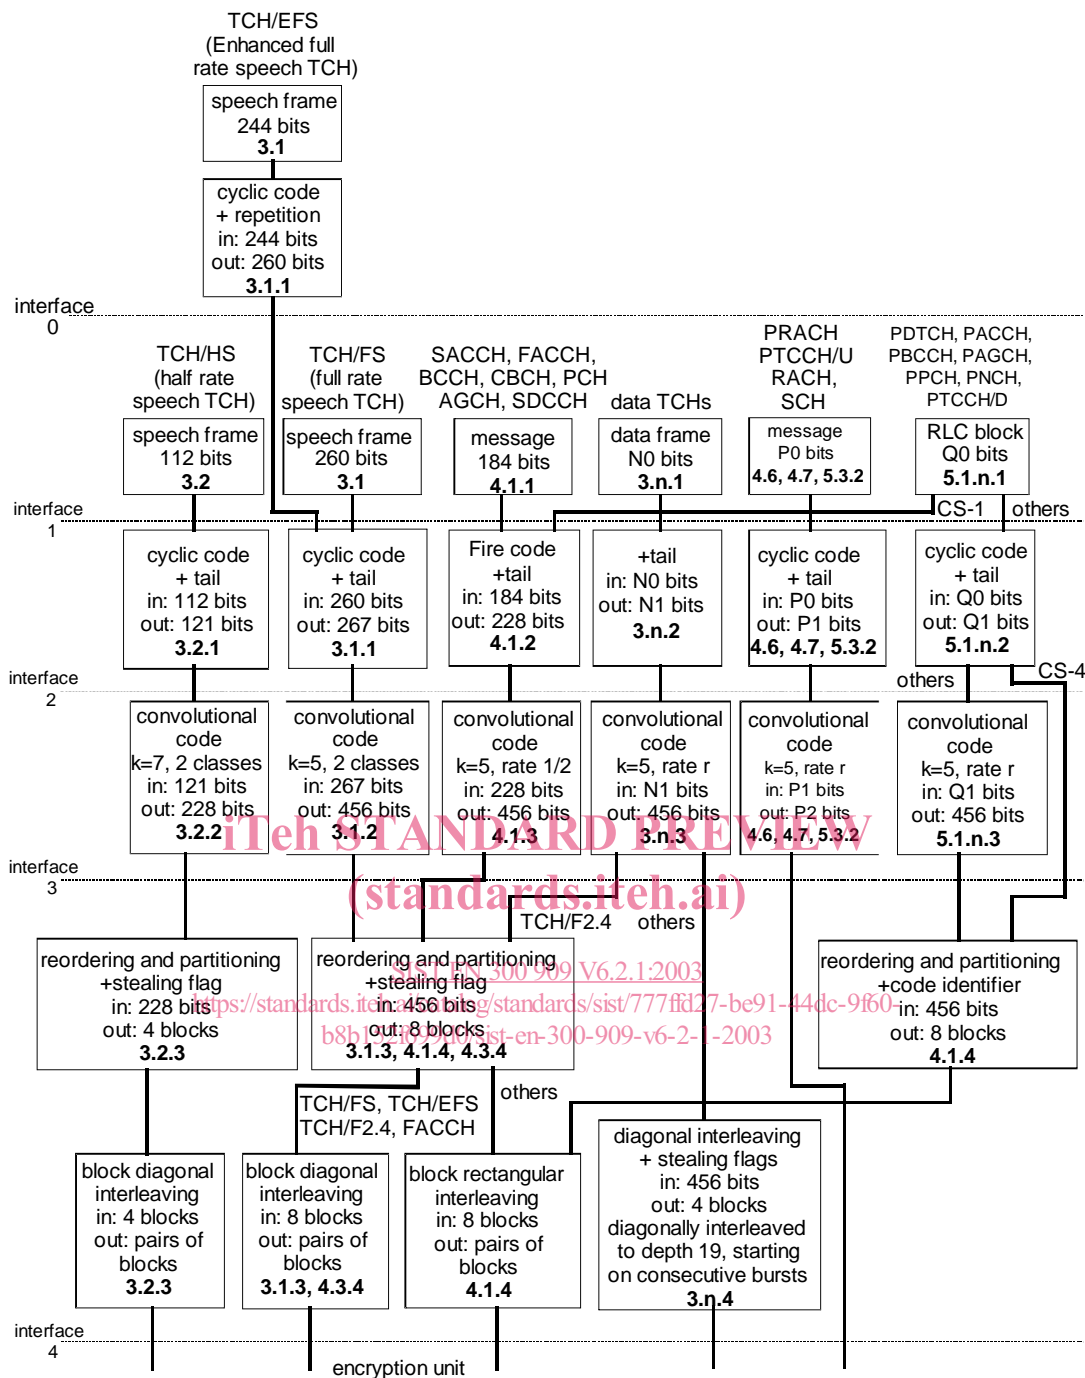


Figure 1: Channel Coding and Interleaving Organization

In each box, the last line indicates the chapter defining the function. In the case of RACH, P0 = 8 and P1 = 18; in the case of SCH, P0 = 25 and P1 = 39. In the case of data TCHs, N0, N1 and n depend on the type of data TCH.

Interfaces:

- 1) information bits (d);
- 2) information + parity + tail bits (u);
- 3) coded bits (c);
- 4) interleaved bits (e).

2.2 Naming Convention

For ease of understanding a naming convention for bits is given for use throughout the technical specification:

- General naming:
 - "k" and "j" for numbering of bits in data blocks and bursts;
 - " K_x " gives the amount of bits in one block, where "x" refers to the data type;
 - "n" is used for numbering of delivered data blocks where;
 - "N" marks a certain data block;
 - "B" is used for numbering of bursts or blocks where;
 - " B_0 " marks the first burst or block carrying bits from the data block with $n = 0$ (first data block in the transmission).
- Data delivered to the preliminary channel encoding unit (for EFR only):
 - $s(k)$ for $k = 1, \dots, K_S$
- Data delivered by the preliminary channel encoding unit (for EFR only) before bits rearrangement
 - $w(k)$ for $k = 1, \dots, K_W$
- Data delivered to the encoding unit (interface 1 in figure 1):
 - $d(k)$ for $k = 0, 1, \dots, K_d - 1$
- Code identifying the used coding scheme (for packet switched channels only):
 - $q(k)$ for $k = 0, 1, \dots, 7$
- Data after the first encoding step (block code, cyclic code; interface 2 in figure 1):
 - $u(k)$ for $k = 0, 1, \dots, K_u - 1$
- Data after the second encoding step (convolutional code ; interface 3 in figure 1):
 - $c(n, k)$ or $c(k)$ for $k = 0, 1, \dots, K_c - 1$
 $n = 0, 1, \dots, N, N+1, \dots$
- Interleaved data:
 - $i(B, k)$ for $k = 0, 1, \dots, K_i - 1$
 $B = B_0, B_0+1, \dots$
- Bits in one burst (interface 4 in figure 1):
 - $e(B, k)$ for $k = 0, 1, 114, 115$
 $B = B_0, B_0+1, \dots$

3 Traffic Channels (TCH)

Two kinds of traffic channel are considered: speech and data. Both of them use the same general structure (see figure 1), and in both cases, a piece of information can be stolen by the FACCH.

3.1 Speech channel at full rate (TCH/FS and TCH/EFS)

The speech coder (whether Full rate or Enhanced full rate) delivers to the channel encoder a sequence of blocks of data. In case of a full rate and enhanced full rate speech TCH, one block of data corresponds to one speech frame.

For the full rate coder each block contains 260 information bits, including 182 bits of class 1 (protected bits), and 78 bits of class 2 (no protection), (see table 2).

The bits delivered by the speech coder are received in the order indicated in GSM 06.10 and have to be rearranged according to table 2 before channel coding as defined in subclauses 3.1.1 to 3.1.4. The rearranged bits are labelled $\{d(0), d(1), \dots, d(259)\}$, defined in the order of decreasing importance.

For the EFR coder each block contains 244 information bits. The block of 244 information bits, labelled $s(1) \dots s(244)$, passes through a preliminary stage, applied only to EFR (see figure 1) which produces 260 bits corresponding to the 244 input bits and 16 redundancy bits. Those 16 redundancy bits correspond to 8 CRC bits and 8 repetition bits, as described in subclause 3.1.1. The 260 bits, labelled $w(1) \dots w(260)$, have to be rearranged according to table 7 before they are delivered to the channel encoding unit which is identical to that of the TCH/FS. The 260 bits block includes 182 bits of class 1 (protected bits) and 78 bits of class 2 (no protection). The class 1 bits are further divided into the class 1a and class 1b, class 1a bits being protected by a cyclic code and the convolutional code whereas the class 1b are protected by the convolutional code only.

3.1.1 Preliminary channel coding for EFR only

3.1.1.1 CRC calculation

An 8-bit CRC is used for error-detection. These 8 parity bits (bits $w(253) \dots w(260)$) are generated by the cyclic generator polynomial: $g(D) = D^8 + D^4 + D^3 + D^2 + 1$ from the 65 most important bits (50 bits of class 1a and 15 bits of class 1b). These 65 bits ($b(1) \dots b(65)$) are taken from the table 5 in the following order (read row by row, left to right):

s39	s40	s41	s42	s43	s44	s48	s87	s45	s2
s3	s8	s10	s18	s19	s24	s46	s47	s142	s143
s144	s145	s146	s147	s92	s93	s195	s196	s98	s137
s148	s94	s197	s149	s150	s95	s198	s4	s5	s11
s12	s16	s9	s6	s7	s13	s17	s20	s96	s199
s1	s14	s15	s21	s25	s26	s28	s151	s201	s190
s240	s88	s138	s191	s241					

The encoding is performed in a systematic form, which means that, in GF(2), the polynomial:

$$b(1)D^{72} + b(2)D^{71} + \dots + b(65)D^8 + p(1)D^7 + p(2)D^6 + \dots + p(7)D^1 + p(8)$$

$p(1) \dots p(8)$: the parity bits ($w(253) \dots w(260)$)

$b(1) \dots b(65)$ = the data bits from the table above

when divided by $g(D)$, yields a remainder equal to 0.

3.1.1.2 Repetition bits

The repeated bits are $s(70)$, $s(120)$, $s(173)$ and $s(223)$. They correspond to one of the bits in each of the PULSE_5, the most significant one not protected by the channel coding stage.