

ETSI TS 138 551 V18.6.0 (2026-04)



TECHNICAL SPECIFICATION

**5G;
NR;
User Equipment (UE) Multiple Input Multiple Output (MIMO)
Over-the-Air (OTA) performance;
Conformance testing
(3GPP TS 38.551 version 18.6.0 Release 18)**



Reference

RTS/TSGR-0538551 vi60

Keywords

5G

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from the
[ETSI Search & Browse Standards](#) application.

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on [ETSI deliver](#) repository.

Users should be aware that the present document may be revised or have its status changed, this information is available in the [Milestones listing](#).

If you find errors in the present document, please send your comments to the relevant service listed under [Committee Support Staff](#).

If you find a security vulnerability in the present document, please report it through our [Coordinated Vulnerability Disclosure \(CVD\)](#) program.

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2026.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the [ETSI IPR online database](#).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™**, **LTE™** and **5G™** logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found at [3GPP to ETSI numbering cross-referencing](#).

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Legal Notice	2
Modal verbs terminology.....	2
Foreword.....	6
1 Scope	8
2 References	8
3 Definitions of terms, symbols, and abbreviations	9
3.1 Terms.....	9
3.2 Symbols.....	9
3.3 Abbreviations	9
4 General	10
4.1 Relationship between minimum requirements and test requirements	10
4.2 Applicability of minimum requirements	10
4.3 Applicability rules for testing of SA and NSA UEs.....	10
5 Frequency Bands	11
5.1 General	11
5.2 Operating bands.....	11
6 FR1 MIMO OTA Performance	14
6.1 General.....	14
6.1.1 Definition of MIMO throughput.....	14
6.1.2 Total Radiated Multi-Antenna Sensitivity (TRMS).....	14
6.2 Void.....	17
7 FR2 MIMO OTA requirements.....	17
7.1 General	17
7.1.1 MIMO Average Spherical Coverage (MASC)	17
Annex A (normative): FR1 Test methodology	20
A.1 General	20
A.2 Multi-Probe Anechoic Chamber (MPAC).....	20
A.2.1 System setup.....	20
A.2.2 Calibration procedure	22
A.2.3 Void.....	22
A.2.4 Minimum Range Length	22
A.3 EUT positioning	23
A.4 Reference coordinate system.....	25
Annex B (informative): Estimation of FR1 measurement uncertainty	27
B.1 MU budget of FR1 MPAC system	27
B.2 Measurement error contribution descriptions for MPAC.....	28
B.2.1 Mismatch for measurement process	28
B.2.2 Measurement distance uncertainty	28
B.2.3 Quality of quiet zone	28
B.2.4 Base Station simulator.....	28
B.2.5 Channel Emulator.....	28
B.2.6 Amplifier uncertainties.....	28
B.2.7 Random uncertainty	29
B.2.8 Throughput measurement: output level step resolution.....	29
B.2.9 Signal flatness	29

B.2.10	Mismatch for calibration process	30
B.2.11	Reference antenna positioning misalignment.....	30
B.2.12	Total Uncertainty of the Network Analyzer	30
B.2.13	Uncertainty of an absolute gain of the calibration antenna	30
B.2.14	Offset of the Phase Center of the Reference Antenna	30
Annex C (normative): FR1 Channel models and Validation procedure		31
C.1	FR1 Channel models	31
C.2	FR1 Base Station beam configuration.....	32
C.3	FR1 Channel model validation.....	33
C.3.1	General	33
C.3.2	Power Delay Profile (PDP)	34
C.3.3	Doppler/Temporal correlation.....	36
C.3.4	Spatial correlation.....	40
C.3.5	Cross-polarization	46
C.3.6	Power validation.....	49
C.4	Validation Pass/fail limit	50
C.4.1	General	50
C.4.2	Pass/Fail Criteria of PDP.....	50
C.4.3	Pass/Fail Criteria of Doppler/Temporal correlation	51
C.4.4	Pass/Fail Criteria of Spatial correlation.....	53
C.4.5	Pass/Fail Criteria of Cross-polarization.....	56
C.4.6	Pass/Fail Criteria of Power validation	57
Annex D (normative): gNB configurations.....		57
D.1	FR1 gNB configurations	57
D.2	FR2 gNB configurations	62
Annex E (normative): Environmental requirements		66
E.1	Scope	66
E.2	Ambient temperature.....	66
E.3	Operating voltage	66
Annex F (normative): Maximum uncertainty of test system and test tolerance.....		68
F.1	Maximum uncertainty of test system	68
F.2	Test tolerances.....	68
Annex G (normative): FR2 Test methodology		68
G.1	General	68
G.2	FR2 3D Multi-Probe Anechoic Chamber (3D-MPAC).....	69
G.2.1	System setup.....	69
G.2.2	Calibration procedure.....	71
G.2.3	Void.....	71
G.2.4	Minimum Range Length	71
G.2.5	Sample Device Orientations for Selected Test Points	72
G.3	Coordinate System and Device positioning	75
Annex H (informative): Estimation of FR2 measurement uncertainty		79
H.1	MU Budget for FR2 3D-MPAC system	79
H2	Measurement error contribution descriptions for 3D-MPAC	80
H.2.1	Mismatch for measurement process	80
H.2.2	Measurement distance uncertainty	80
H.2.3	Quality of quiet zone	80

H.2.4	Base Station simulator.....	80
H.2.5	Channel Emulator.....	80
H.2.6	Amplifier uncertainties.....	80
H.2.7	Random uncertainty	81
H.2.8	Throughput measurement: output level step resolution.....	81
H.2.9	Signal flatness	81
H.2.10	Mismatch for calibration process	82
H.2.11	Reference antenna positioning misalignment.....	82
H.2.12	Total Uncertainty of the Network Analyzer	82
H.2.13	Uncertainty of an absolute gain of the calibration antenna	82
H.2.14	Offset of the Phase Center of the Reference Antenna	82
Annex I (normative): FR2 Channel models and Validation procedure		82
I.1	FR2 Channel models	82
I.2	FR2 Base Station beam configuration.....	83
I.3	FR2 Channel model validation.....	84
I.3.1	General	84
I.3.2	FR2 Power Delay Profile (PDP).....	84
I.3.3	FR2 Doppler/Temporal correlation	86
I.3.4	FR2 PAS similarity percentage (PSP).....	88
I.3.5	FR2 Cross-polarization.....	92
I.3.6	FR2 Power validation.....	93
I.4	Validation Pass/fail limit	94
I.4.1	General	94
I.4.2	Pass/Fail Criteria of PDP.....	94
I.4.3	Pass/Fail Criteria of Doppler/Temporal correlation	94
I.4.4	Pass/Fail Criteria of PSP	95
I.4.5	Pass/Fail Criteria of Cross-polarization.....	96
I.4.6	Pass/Fail Criteria of Power validation.....	96
Annex J (informative): Change history		97
History		100

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

In the present document, modal verbs have the following meanings:

shall indicates a mandatory requirement to do something

shall not indicates an interdiction (prohibition) to do something

The constructions "shall" and "shall not" are confined to the context of normative provisions, and do not appear in Technical Reports.

The constructions "must" and "must not" are not used as substitutes for "shall" and "shall not". Their use is avoided insofar as possible, and they are not used in a normative context except in a direct citation from an external, referenced, non-3GPP document, or so as to maintain continuity of style when extending or modifying the provisions of such a referenced document.

should indicates a recommendation to do something

should not indicates a recommendation not to do something

may indicates permission to do something

need not indicates permission not to do something

The construction "may not" is ambiguous and is not used in normative elements. The unambiguous constructions "might not" or "shall not" are used instead, depending upon the meaning intended.

can indicates that something is possible

cannot indicates that something is impossible

The constructions "can" and "cannot" are not substitutes for "may" and "need not".

will indicates that something is certain or expected to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document

will not indicates that something is certain or expected not to happen as a result of action taken by an agency the behaviour of which is outside the scope of the present document

might indicates a likelihood that something will happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

might not indicates a likelihood that something will not happen as a result of action taken by some agency the behaviour of which is outside the scope of the present document

In addition:

is (or any other verb in the indicative mood) indicates a statement of fact

is not (or any other negative verb in the indicative mood) indicates a statement of fact

The constructions "is" and "is not" do not indicate requirements.

Sample Document

get full document from standards.iteh.ai

1 Scope

The present document establishes the Multiple Input Multiple Output (MIMO) Over-the-Air (OTA) performance requirements for NR UEs operating on frequency Range 1 and frequency range 2, for NR standalone (SA) and NR non-standalone (NSA) operation mode. The corresponding test methodologies are also presented in the Annex of this Technical Specification.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 38.101-1: "NR; User Equipment (UE) radio transmission and reception; Part 1: Range 1 Standalone".
- [3] 3GPP TS 38.101-3: "NR; User Equipment (UE) radio transmission and reception; Part 3: Range 1 and Range 2 Interworking operation with other radios".
- [4] 3GPP TS 38.508-1: "5GS; User Equipment (UE) conformance specification; Part 1: Common test environment".
- [5] 3GPP TR 38.901: "Study on channel model for frequencies from 0.5 to 100 GHz".
- [6] 3GPP TS 38.101-4: "NR; User Equipment (UE) radio transmission and reception; Part 4: Performance requirements".
- [7] 3GPP TS 38.151: "NR; User Equipment (UE) Multiple Input Multiple Output (MIMO) Over-the-Air (OTA) performance requirements".
- [8] 3GPP TS 38.561: "UE TRP (Total Radiated Power) and TRS (Total Radiated Sensitivity) requirements and test methodologies for FR1 (NR SA and EN-DC); User Equipment (UE) conformance specification".
- [9] IEEE Std 149-2021: "IEEE Recommended Practice for Antenna Measurements", IEEE.
- [10] 3GPP TR 38.827: "Study on radiated metrics and test methodology for the verification of multi-antenna reception performance of NR User Equipment (UE)".
- [11] 3GPP TS 38.101-2: "NR; User Equipment (UE) radio transmission and reception; Part 2: Range 2 Standalone".
- [12] 3GPP TS 38.508-2: "5GS; User Equipment (UE) conformance specification; Part 2: Common Implementation Conformance Statement (ICS) proforma".
- [13] 3GPP TS 38.521-2: "User Equipment (UE) conformance specification; Radio transmission and reception; Part 2: Range 2 Standalone".
- [14] 3GPP TR 38.903: "NR; Derivation of test tolerances and measurement uncertainty for User Equipment (UE) conformance test cases"

3 Definitions of terms, symbols, and abbreviations

3.1 Terms

For the purposes of the present document, the terms given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

Free Space (FS): UE used in a free space configuration

Handheld UE: UE intended to be used in hand held scenario.

MIMO Average Spherical Coverage: An averaged sensitivity of best 18 FR2 MIMO OTA sensitivity values within the 3D sphere with constant-density points for PC3 device.

Primary mechanical mode: mode that is most often used for a specific user scenario. Every terminal has at least one primary mechanical mode, if multiple modes are supported, different primary mechanical modes may be applicable for different user scenarios, e.g., different primary mechanical modes for Free Space and Hand phantom usage for the same UE.

PSP (PAS Similarity Percentage): The similarity of the PAS produced by the OTA system and the reference PAS, which is presented by the Total Variation Distance (TVD) of power angular spectrum (PAS). PSP is defined as $(1 - \text{TVD}) * 100\%$. PSP=100% denotes full similarity and PSP=0% denotes full dissimilarity.

3.2 Symbols

For the purposes of the present document, the following symbols apply:

$P_{RS-EPRE-MAX}$ Maximum downlink RS-EPRE

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

ACK	Acknowledgment
AOA	Azimuth angle Of Arrival
AOD	Azimuth angle Of Departure
ASA	Azimuth Spread of Arrival angles
ASD	Azimuth Spread of Departure angles
BS	Base Station
CASA	Cluster ASA
CASD	Cluster ASD
CDL	Clustered Delay Line
CIR	Channel Impulse Response
CSI	Channel state information
CSI-RS	CSI reference signal
CW	Continuous Wave
CZSA	Cluster ZSA
CZSD	Cluster ZSD
DML	Data Mode Landscape
DMP	Data Mode Portrait
DMRS	Demodulation reference signal
DMSU	Data Mode Screen Up
DUT	Device Under Test
EUT	Equipment Under Test
EVM	Error Vector Magnitude
FR1	Frequency Range 1
FR2	Frequency Range 2

FRC	Fixed Reference Measurement Channel
FS	Free Space
gNB	Next Generation Node B
HARQ	Hybrid automatic repeat request
MIMO	Multiple Input Multiple Output
MPAC	Multi-Probe Anechoic Chamber
MU	Measurement Uncertainty
NACK	Not Acknowledged
NR	New Radio
NSA	Non-Standalone a mode of operation where operation of a radio is assisted with another radio
OCNG	OFDMA Channel Noise Generator
OTA	Over The Air
PAS	Power Angular Spectrum
PDP	Power Delay Profile
PDSCH	Physical downlink shared channel
PRB	Physical resource block
PSP	PAS Similarity Percentage
RE	Resource Element
RS-EPRE	Reference Signal-Energy Per Resource Element
SCS	Subcarrier spacing
SNR	Signal to Noise Ratio
SS	System Simulator
SSS	Secondary Synchronization Signal
TBS	Transport Block Size
TCI	Transmission Configuration Indicator
TRMS	Total Radiated Multi-antenna Sensitivity
UE	User Equipment
UMa	Urban Macro
UMi	Urban Micro
VNA	Vector Network Analyser
XPR	Cross-Polarization Ratio
ZOA	Zenith angle Of Arrival
ZOD	Zenith angle Of Departure
ZSA	Zenith angle Spread of Arrival
ZSD	Zenith angle Spread of Departure

4 General

4.1 Relationship between minimum requirements and test requirements

The Minimum Requirements given in 3GPP TS 38.151 [7] make no allowance for Measurement Uncertainty (MU). The present document defines the MU and Test Tolerances in Annex B for FR1 MIMO OTA and Annex H for FR2 MIMO OTA. The test tolerances are used to relax the Minimum Requirements in 3GPP TS 38.151 [7] to create the Test Requirements.

4.2 Applicability of minimum requirements

The MIMO OTA minimum requirements apply only to the primary mechanical mode of UE which is declared by the manufacturer if the UE can support multiple mechanical modes.

The minimum requirements apply only to the UE under normal environmental conditions specified in Annex E.

4.3 Applicability rules for testing of SA and NSA UEs

The applicability and test coverage rules for Non-Standalone (NSA) only capable UEs shall include the following:

- For FR1 NSA (EN-DC) only capable UEs, testing is not required.
- For FR2 NSA (EN-DC) only capable UEs, for each FR2 NR band supported by the device, test the UE in EN-DC mode using any one example configuration containing that NR band or configuration declaration decision tree as per recommended MIMO OTA test procedures in this specification.

The applicability and test coverage rules for Standalone (SA) and NSA (EN-DC) capable UEs shall include the following:

- For FR1 UEs, for each NR band in a device, test the UE in Standalone Mode as per the TRMS test procedures in this specification. This shall also fulfil coverage for all EN-DC minimum performance requirements for that NR band and need not be retested in EN-DC mode.
- For FR2 UEs, for each FR2 NR band supported by the device, test the UE in any of SA modes including FR2 only mode, FR1+FR2 NR-DC mode and FR1+FR2 NR-CA mode using any one example configuration containing that NR band. This shall fulfil coverage for FR2 MIMO OTA requirements for that NR band and need not be retested in EN-DC mode.

5 Frequency Bands

5.1 General

NR MIMO OTA Requirements are defined separately for different Frequency Ranges (FR). The frequency ranges in which NR can operate according to this version of the specification are identified as described in Table 5.1-1.

Table 5.1-1: Definition of frequency ranges

Frequency range designation	Corresponding frequency range
FR1	410 MHz - 7125 MHz
FR2	24250 MHz - 52600 MHz

The present specification covers both FR1 and FR2 operating bands. For FR2, only FR2-1 bands are applicable.

5.2 Operating bands

NR is designed to operate in FR1 operating bands defined in 3GPP TS 38.101-1 [2] and FR2 operating bands defined in TS 38.101-2 [11]. NSA band combinations are defined in 3GPP TS 38.101-3 [3].

For FR2 EN-DC capable UEs, principle of EN-DC band combinations selection for FR2 MIMO OTA testing is as following:

- 1) Focus on the performance of the NR carrier and do not consider multiple permutations between different LTE bands and NR band under test, i.e., for each NR band, only select one EN-DC band combination.
- 2) For UE supporting multiple EN-DC band combinations for the same NR band, consider only those EN-DC configurations which have no MSD impact on either LTE or NR.

Table 5.2-1: Measurement parameters for example inter-band EN-DC band combinations (LTE + FR2, two bands)

EN-DC configuration	E-UTRA configurations	NR FR2 configurations
DC_66A_n261A	Mid channel	Mid channel

Table 5.2-2: Measurement parameters for example inter-band NR-DC band combinations (FR1 + FR2, two bands)

NR-DC configuration	NR FR1 configurations	NR FR2 configurations
DC_n66A_n261A	Mid channel	Mid channel

Table 5.2-3: Measurement parameters for example inter-band NR-CA band combinations (FR1 + FR2, two bands)

NR-CA configuration	NR FR1 configurations	NR FR2 configurations
CA-n66A_n261A	Mid channel	Mid channel

With the above basic principle and example band combination, the selection logic for testing is defined by the decision trees shown in Figure 5.2-1 and Figure 5.2-2.

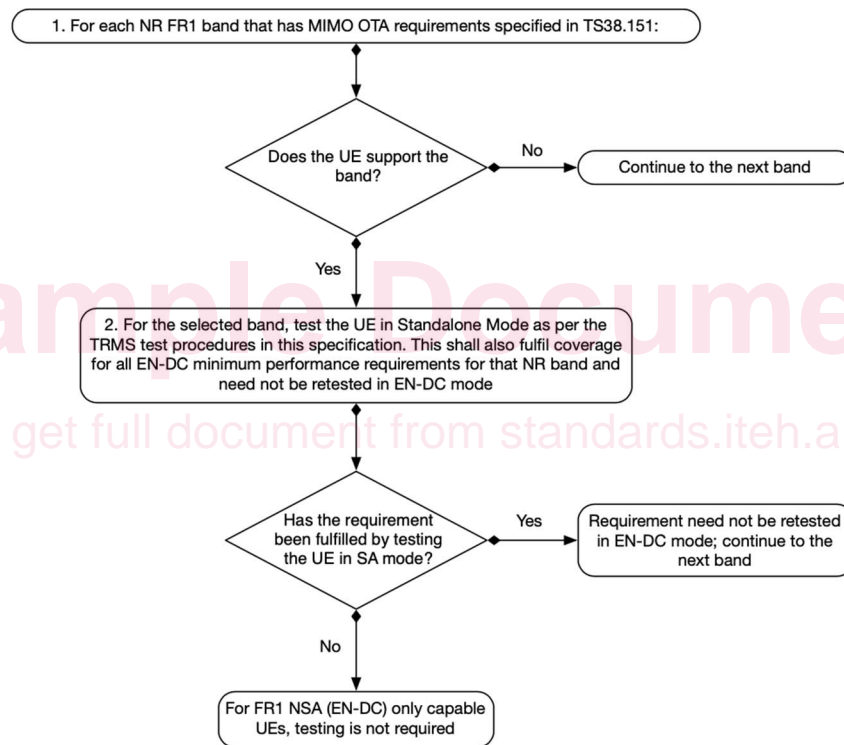


Figure 5.2-1: Decision tree for FR1 MIMO OTA testing

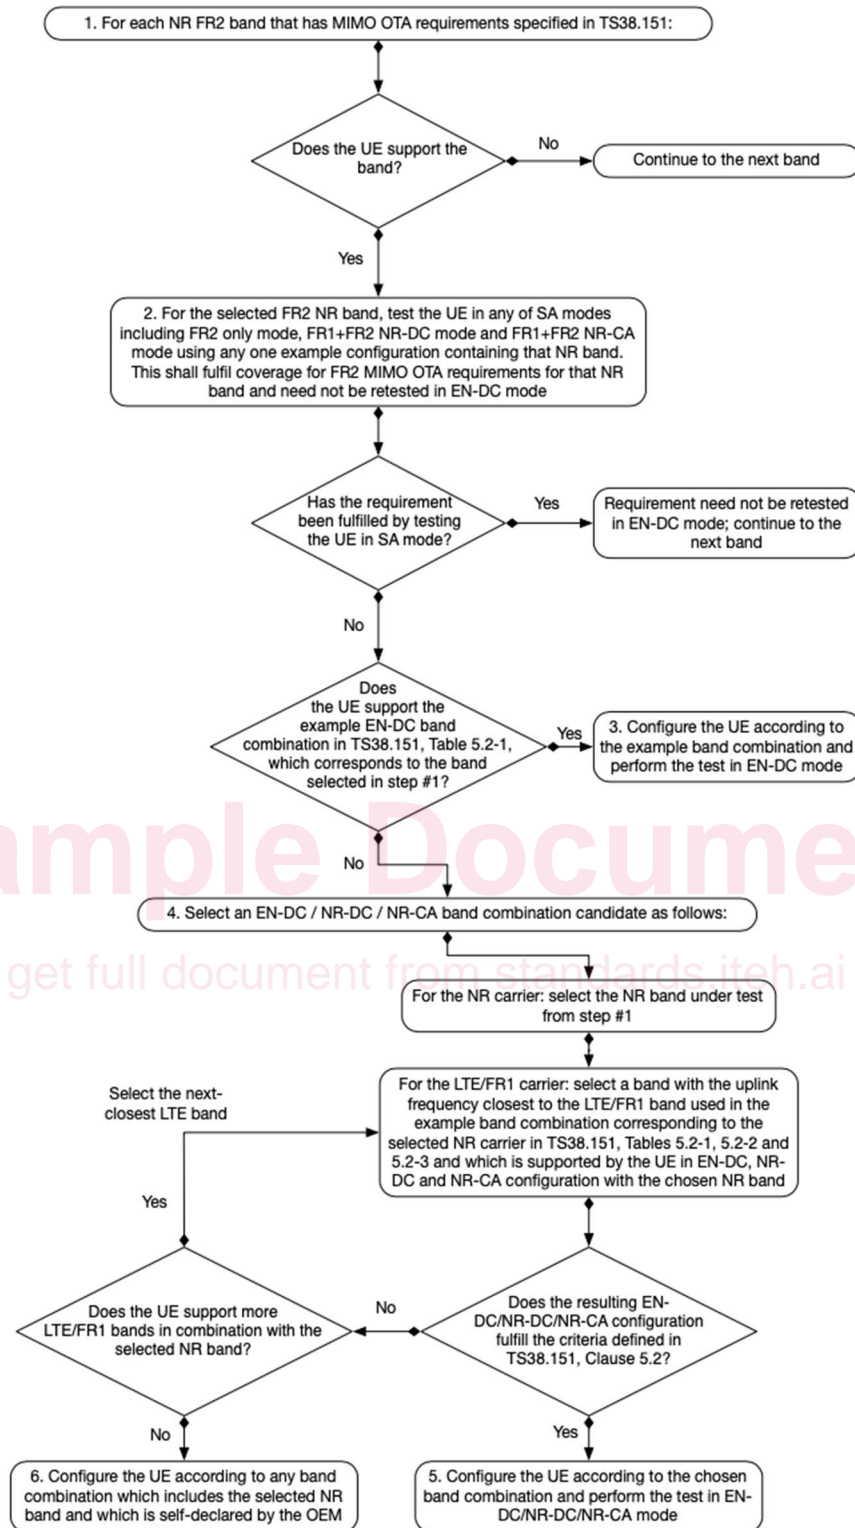


Figure 5.2-2: Decision tree for FR2 MIMO OTA testing

6 FR1 MIMO OTA Performance

6.1 General

6.1.1 Definition of MIMO throughput

The MIMO throughput is defined here as the time-averaged number of correctly received transport blocks in a communication system running an application, where a Transport Block is defined in the reference measurement channel. From OTA perspective, this is also called MIMO OTA throughput. It will be used as the baseline figure of merit for FR1 and FR2 MIMO OTA testing.

The MIMO OTA throughput is measured at the top of physical layer of NR system under the use of FRC, the SS transmit fixed-size payload bits to the DUT. The DUT signals back either ACK or NACK to the SS. The SS then records the following:

- number of ACKs;
- number of NACKs; and
- number of DTX slots.

Hence the MIMO (OTA) throughput can be calculated as:

$$MIMO\ (OTA)\ Throughput = \frac{Transmitted\ TBS \times Num\ of\ ACKs}{Measurement\ Time}$$

Where Transmitted TBS is the Transport Block Size transmitted by the SS, which is fixed for an FRC during the measurement period. Measurement Time is the total composed of successful slots (ACK), unsuccessful slots (NACK) and DTX-symbols.

The time-averaging is to be taken over a time period sufficiently long to average out the variations due to the fading channel. Therefore, this is also called the average MIMO OTA throughput. The throughput should be measured at a time when eventual start-up transients in the system have evanesced.

6.1.2 Total Radiated Multi-Antenna Sensitivity (TRMS)

6.1.2.1 Test Purpose

The purpose of this test is to ensure that the UE meets the TRMS minimum performance requirements.

6.1.2.2 Test Applicability

This test case applies to all types of NR UE release 17 and forward. See clause 4.2 for additional applicability.

6.1.2.3 Minimum Conformance Requirements

Editor's Note: TRMS value for band n79 is pending in RAN4 spec TS38.151.

The average TRMS of free space data mode portrait (FS DMP), free space data mode landscape (FS DML), and free space data mode screen up (FS DMSU), is defined as the FR1 MIMO OTA requirement. The averaging shall be done in linear scale for the TRMS results at these DUT positions, according to the formula:

$$TRMS_{average,70} = 10 \log \left[3 / \left(\frac{1}{10^{S_{FS_DMP,70}/10}} + \frac{1}{10^{S_{FS_DML,70}/10}} + \frac{1}{10^{S_{FS_DMSU,70}/10}} \right) \right]$$

where