

INTERNATIONAL STANDARD

**Superconductivity -
Part 15: Electronic characteristic measurements - Intrinsic surface impedance of
superconductor films at microwave frequencies**

get full document from standards.iteh.ai



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2026 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Secretariat
3, rue de Varembeé
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search -

webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews, graphical symbols and the glossary. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 500 terminological entries in English and French, with equivalent terms in 25 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD	5
INTRODUCTION	7
1 Scope	8
2 Normative references	8
3 Terms and definitions	8
4 Requirements	9
5 Apparatus	9
5.1 Measurement equipment	9
5.2 Measurement apparatus	10
5.3 Dielectric rods	15
5.4 Superconductor films and copper cavity	16
6 Measurement procedure	16
6.1 Set-up	16
6.2 Measurement of the reference level	16
6.3 Measurement of the R_S of oxygen-free high conductivity copper	17
6.4 Determination of the R_{Se} of superconductor films and $\tan \delta$ of standard dielectric rods	20
6.5 Determination of the penetration depth	22
6.6 Determination of the intrinsic surface impedance	23
7 Uncertainty of the test method	24
7.1 Measurement of unloaded quality factor	24
7.2 Measurement of loss tangent	24
7.3 Temperature	25
7.4 Specimen and holder support structure	25
7.5 Uncertainty in the intrinsic surface impedance	25
8 Test Report	25
8.1 Identification of test specimen	25
8.2 Report of the Z_S values	26
8.3 Report of the test conditions	26
Annex A (informative) Detailed information relating to Clauses 1 to 8	27
A.1 General	27
A.2 Requirements	29
A.3 Theory and the measurement procedure for the intrinsic surface impedance	30
A.3.1 Theoretical relation between the Z_S and the Z_{Se} [14]	30
A.3.2 Calculation of the geometrical factors [22]	35
A.3.3 Procedures for determining the Z_S [14] [22] [23]	37
A.4 Dimensions of the standard sapphire rod	38
A.5 Dimensions of the closed type resonators	39
A.6 Test results for type A and type B sapphire resonators	40
A.6.1 Test results for type A resonator	40
A.6.2 Test results for type B sapphire resonator	43
A.7 Uncertainty of the test results	47
Annex B (informative) Additional information relating to determination of the penetration depth and the intrinsic surface impedance of superconductor films at microwave frequencies	48

B.1	General.....	48
B.2	Experimental requirements for utilizing Formula (A.43)	48
B.2.1	Requirements with regard to the temperature	48
B.2.2	Requirements with regard to the electromagnetic radiation effects.....	48
B.2.3	Requirements for suppressing mechanical vibrations of the cryocooler.....	50
B.3	Procedures for determining the penetration depth and the intrinsic surface impedance of YBCO films	50
Annex C (informative) Standard uncertainty evaluation in the test method for the intrinsic surface impedance of superconductor films at microwave frequencies		52
C.1	General.....	52
C.2	Assessment of combined uncertainty in the Z_S from uncertainties in the R_{Se} and λ	52
C.3	Assessment of combined uncertainty in the Z_S from the measured complex conductivity.....	53
C.4	Results from the round robin test	54
C.4.1	Uncertainties in the R_{Se} and f_0	54
C.4.2	Uncertainty in the λ	57
C.4.3	Uncertainties in the Z_S of the YBCO films from the round robin test.....	58
C.4.4	Effects of uncertainty in temperature on $u_r(R_{Se})$ from the round robin test.....	59
Bibliography.....		61
<p style="text-align: center; color: #f08080; font-size: 2em; opacity: 0.5;">Sample Document</p> <p style="text-align: center; color: #f08080; font-size: 1em; opacity: 0.5;">get full document from standards.iteh.ai</p>		
Figure 1 – Schematic diagram for the measurement equipment for the intrinsic Z_S of HTS films at cryogenic temperatures		11
Figure 2 – Schematic diagram of a dielectric resonator with a switch for thermal connection		12
Figure 3 – Typical dielectric resonator with a movable top plate		13
Figure 4 – Switch block for thermal connection		14
Figure 5 – Dielectric resonator assembled with a switch block for thermal connection.....		15
Figure 6 – A typical resonance peak		18
Figure 7 – Reflection scattering parameters S_{11} and S_{22}		19
Figure 8 – Definitions for terms in Table 5		25
Figure A.1 – Schematic diagram for the measurement system		28
Figure A.2 – A motion stage using step motors		29
Figure A.3 – Cross-sectional view of a dielectric resonator		30
Figure A.4 – A diagram for simplified cross-sectional view of a dielectric resonator		35
Figure A.5 – Mode chart for type A sapphire resonator with a cavity diameter of 12 mm		39
Figure A.6 – Frequency response of type A sapphire resonator		40
Figure A.7 – Q_U versus temperature for the TE_{021} and the TE_{012} modes of type A sapphire resonator with 360 nm-thick YBCO films.....		40
Figure A.8 – The resonant frequency f_0 versus temperature for the TE_{021} and TE_{012} modes of type A sapphire resonator with 360 nm-thick YBCO films.....		41
Figure A.9 – The temperature dependence of the R_{Se} of YBCO films with the thicknesses of 70 nm to 360 nm measured at ~ 40 GHz.....		41
Figure A.10 – The temperature dependence of $\Delta\lambda_e$ for the YBCO films with the thicknesses of 70 nm and 360 nm measured at ~ 40 GHz.....		42

Figure A.11 – The temperature dependence of the penetration depth λ of the 360 nm-thick YBCO film measured at 10 kHz using the mutual inductance method and at ~ 40 GHz using type A sapphire resonator	42
Figure A.12 – The temperature dependence of the R_S of YBCO films with the thicknesses of 70 nm to 360 nm measured at ~ 40 GHz.....	43
Figure A.13 – Mode chart used for type B sapphire resonator with a cavity diameter of 15,78 mm.....	44
Figure A.14 – Frequency response of type B sapphire resonator	45
Figure A.15 – The temperature dependence of the R_{Se} for the 300 nm-thick YBCO films measured at ~ 38 GHz.....	45
Figure A.16 – The temperature dependence of $\Delta\lambda_e$ for the 300 nm-thick YBCO film measured at ~ 38 GHz.....	46
Figure A.17 – The temperature dependence of σ_2 for the 300 nm-thick YBCO films measured at ~ 38 GHz.....	46
Figure A.18 – The temperature dependence of the R_S for the 300 nm-thick YBCO films measured at ~ 38 GHz.....	47
Figure B.1 – A comparison between variations in the temperature of the top plate and the rest of the sapphire resonator over time	49
Figure B.2 – The temperature dependence of the ratio of Δf_0 to f_0 for type A sapphire resonator having YBCO endplates for the gap distances of 0 μm (filled) and 10 μm (open).....	49
Figure B.3 – The temperature dependence of TE ₀₂₁ -mode Q_U of type A sapphire resonator for the gap distances of 0 μm (filled) and 10 μm (open).....	50
Figure C.1 – The temperature dependence of the measured TE ₀₂₁ -mode Q_U vs. temperature data from the round robin test	55
Figure C.2 – The temperature dependence of the measured resonant frequencies of the TE ₀₂₁ mode for the sapphire resonator under the round robin test	55
Figure C.3 – The temperature dependence of the relative uncertainty in the TE ₀₂₁ mode Q_U and the TE ₀₁₂ mode Q_U from the round robin test	56
Figure C.4 – The temperature dependence of the relative uncertainty in the TE ₀₂₁ mode f_0 vs. temperature data from the round robin test	56
Figure C.5 – Comparison of the temperature dependence of the measured R_{Se} at ~ 38 GHz for the YBCO films under the round robin test	57
Figure C.6 – The temperature dependence of the relative uncertainties in the R_{Se} (open circle) and R_S (filled circle) at ~ 38 GHz for the YBCO films under the round robin test	58
Figure C.7 – The temperature dependence of the relative uncertainties in the TE ₀₂₁ -mode Q_U from the RRT (open circle) and that due to the presumed uncertainty of 0,5 K in the temperature (cross) at ~ 38 GHz for type B sapphire resonator	60
Table 1 – Typical dimensions of a sapphire rod	16
Table 2 – Typical dimensions of OFHC cavities and HTS films.....	16
Table 3 – Geometrical factors and filling factors calculated for the standard sapphire resonators	20
Table 4 – Specifications of Vector Network Analyser	24
Table 5 – Type B uncertainty for the specifications on the sapphire rod	24

Table C.1 – Values of ε_{r4} , l , t , β_4 , β_{z4} , β_h , λ and $\coth(t/\lambda)$ at 30 K 53

Table C.2 – The average values for the R_{Se} and the R_S of the YBCO films from the round robin test and the relative uncertainties in the R_{Se} and the R_S 59

Sample Document

get full document from standards.iteh.ai

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**Superconductivity -
Part 15: Electronic characteristic measurements - Intrinsic surface
impedance of superconductor films at microwave frequencies**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at <https://patents.iec.ch>. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 61788-15 has been prepared by IEC technical committee 90: Superconductivity. It is an International Standard.

This second edition cancels and replaces the first edition published in 2011. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) informative Annex B, combined relative standard uncertainty in the intrinsic surface impedance is added;
- b) the terms, 'precision and accuracy', are replaced with uncertainty;
- c) results from a round robin test are added.

The text of this International Standard is based on the following documents:

Draft	Report on voting
90/550/FDIS	90/556/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

A list of all parts in the IEC 61788 series, published under the general title *Superconductivity*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn, or
- revised.

Sample Document

get full document from standards.iteh.ai

INTRODUCTION

Since the discovery of high T_C superconductors (HTS), extensive researches have been performed worldwide on electronic applications and large-scale applications with HTS filter subsystems based on $\text{YBa}_2\text{Cu}_3\text{O}_{7-\delta}$ (YBCO) having already been commercialized [1]¹.

Merits of using HTS films for microwave devices such as resonators, filters, antennas, delay lines, etc., include i) microwave losses from HTS films could be extremely low and ii) no signal dispersion on transmission lines made of HTS films due to extremely low intrinsic surface resistance (R_S) [2] and frequency-independent penetration depth (λ) of HTS films, respectively.

In this regard, when it comes to designing of HTS-based microwave devices, it is important to measure the intrinsic surface impedance (Z_S) of HTS films with $Z_S = R_S + jX_S$ and $X_S = \omega\mu_0\lambda$ (here ω and μ_0 denote the angular frequency and the permeability of vacuum, respectively, X_S , the intrinsic surface reactance, and $X_S = \omega\mu_0\lambda$ is valid at temperatures not too close to the critical temperature T_C of HTS films).

Various reports have been made on measuring the R_S of HTS films at microwave frequencies with the typical R_S of HTS films as low as 1/100 to 1/50 of that of oxygen-free high conductivity copper (OFHC) at 77 K and 10 GHz. The R_S of conventional superconductors such as niobium (Nb) could be easily measured by using Nb cavities by converting the resonator quality factor (Q) to the R_S of Nb. However, such conventional measurement method could no longer be applied to HTS films grown on dielectric substrates, with which it is basically impossible to make all-HTS cavities. Instead, for measuring the R_S of HTS films, several other methods have been useful, which include microstrip resonator method [3], coplanar microstrip resonator method [4], parallel plate resonator method [5] and dielectric resonator method ([6] to [11]). Among the stated methods, the dielectric resonator method has been very useful due to the fact that the method enables to measure the microwave surface resistance in a non-invasive way and with accuracy. In 2002, the International Electrotechnical Commission (IEC) published the dielectric resonator method as a measurement standard [12].

The test method given in this document enables to measure not only the R_S but also the X_S of HTS films regardless of the film's thickness by using single sapphire resonator, which differs from the existing IEC standard (IEC 61788-7) that is limited to measure the surface resistance of superconductor films having the thicknesses of more than 3λ at the measured temperature by using two sapphire resonators. In fact, the measured surface resistances of HTS films with different thicknesses of less than 3λ mean effective values instead of intrinsic values, which cannot be used for directly comparing the microwave properties of HTS films among one another [13], [14]. Use of a single sapphire resonator as suggested in this document also enables to reduce uncertainty in the measured surface resistance that can result from using two sapphire resonators with sapphire rods of different quality.

The test method given in this document can also be applied to HTS coated conductors, HTS bulks and other superconductors having established models for the penetration depth.

This document is intended to provide an appropriate and agreeable technical base for the time being to engineers working in the fields of electronics and superconductivity technology.

The test method covered in this document has been discussed at the VAMAS (Versailles Project on Advanced Materials and Standards) TWA-16 meeting.

¹ Numbers in square brackets refer to the Bibliography.

1 Scope

This part of IEC 61788 describes measurements of the intrinsic surface impedance (Z_S) of HTS films at microwave frequencies by a modified two-resonance mode dielectric resonator method [14], [15]. The object of measurement is to obtain the temperature dependence of the intrinsic surface impedance, Z_S , at the resonant frequency f_0 .

The frequency and thickness range and the measurement resolution for the Z_S of HTS films are as follows:

- frequency: up to 40 GHz;
- film thickness: greater than 50 nm;
- measurement resolution: 0,01 mΩ at 10 GHz.

It is crucial that the Z_S data at the measured frequency, and that scaled to 10 GHz be reported for comparison, assuming the f^2 rule for the intrinsic surface resistance, R_S ($f < 40$ GHz), and the f rule for the intrinsic surface reactance, X_S .

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050-815:2024, *International Electrotechnical Vocabulary - Part 815: Superconductivity*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60050-815 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at <https://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

3.1

surface impedance

impedance of a metallic material or a superconductor when a high-frequency electromagnetic wave is constrained to the surface

Note 1 to entry: The surface impedance governs the thermal losses of superconducting RF cavities.

Note 2 to entry: This entry was numbered 815-13-60 in IEC 60050-815:2015.

[SOURCE: IEC 60050-815:2024, 815-22-33]

3.2

intrinsic surface impedance

impedance of conductors (or superconductors) having the thicknesses sufficiently greater than the skin depth (or the penetration depth), with the intrinsic surface impedance Z_S defined as the ratio of the tangential component of the electric field (E_t) and that of the magnetic field (H_t) at a conductor or a superconductor surface:

$$Z_S = E_t / H_t = R_S + jX_S \quad (1)$$

3.3

effective surface impedance

impedance of conductors (or superconductors) having the thicknesses not sufficiently greater than the skin depth (or the penetration depth) as defined by

$$Z_{Se} = E_t / H_t = R_{Se} + jX_{Se} \quad (2)$$

with Z_{Se} being significantly different from Z_S in Formula (1).

4 Requirements

The Z_S of HTS films shall be measured by applying a microwave signal to a dielectric resonator with the superconductor specimen and then measuring the attenuation of the resonator at each frequency. The frequency shall be swept around the resonant frequency as the centre, and the attenuation – frequency characteristics as well as the scattering parameters shall be recorded to obtain the Q -value, which corresponds to the loss.

The target relative uncertainty of this method is less than 20 % at temperatures of 30 K to 60 K.

It is the responsibility of the user of this document to consult and establish safety and health practices and to determine the applicability of regulatory limitations prior to use.

Hazards exist in this type of measurement. The use of a cryogenic system is essential to cool the superconductors to allow transition into the superconducting state. Direct contact of skin with cold apparatus components can cause immediate freezing, as can direct contact with a spilled cryogen. The use of an r.f.-generator is also essential to measure high-frequency properties of materials. If its power is too high, direct exposure to human bodies can cause an immediate burn.

5 Apparatus

5.1 Measurement equipment

Figure 1 shows a schematic diagram of the equipment required for the microwave measurement. The equipment consists of a network analyser system for transmission measurements, a measurement apparatus, and thermometers for monitoring the temperature of HTS films under test.

An incident power generated from a suitable microwave source such as a synthesized sweeper is applied to the dielectric resonator fixed in the measurement apparatus. The transmission characteristics are shown on the display of the network analyser.

The measurement apparatus is fixed in a temperature-controlled cryostat. The cryostat consists of a vacuum chamber and a cryocooler, the cold finger of which the measurement apparatus is connected to. For the penetration depth measurements, vibrations from the cryocooler should be dampened by using dampers between the vacuum chamber and the cryocooler. During collection of resonance data as a function of temperature, the resonance signal should remain stable at each temperature.

For measuring the Z_S of HTS films, a vector network analyser is recommended because it has better measurement accuracy than a scalar network analyser due to its wider dynamic range.

5.2 Measurement apparatus

Figure 2 shows a schematic diagram of a typical measurement apparatus for the Z_S of HTS films deposited on a substrate with a flat surface. The lower HTS film is pressed down (by the copper cavity) against a spring, which is made of beryllium copper. Use of a plate type spring is recommended for the improvement of measurement uncertainty. This type of spring reduces the friction between the spring and the other part of the apparatus and enables smooth motion of HTS films in the course of thermal expansion/contraction of the dielectric-loaded cavity. The upper HTS film is glued to the Cu plate at the top using adhesives with good thermal conductivity.

The R_{Se} is measured with the upper HTS film being in contact with the top of the Cu cavity. During measurements of the R_{Se} , the whole resonator is first cooled down to the lowest temperature with the cryocooler turned on and then warmed up to higher temperatures with the cryocooler turned off. Meanwhile, the X_{Se} is measured with a small gap between the upper HTS film and the top of the Cu cavity. The gap distance shall be set to a value predetermined at the room temperature by using either a micrometre or a step motor connected to the upper superconductor film through a polytetrafluoroethylene rod. The real gap distances would be a little longer at cryogenic temperatures than the corresponding predetermined ones due to thermal contraction of the polytetrafluoroethylene rod. The gap distance should be small enough not to cause significant radiation loss and large enough to enable control of the temperature of the upper superconductor film. More detailed descriptions on a dielectric resonator with a movable top plate are given in Figure 3, with Figure 4 and Figure 5 displaying a switch block for thermal connection and the dielectric resonator assembled with the switch block, respectively. Procedures for controlling the temperature of the upper HTS film for measurements of the X_S are described in 6.6.

Each of the two semi-rigid cables shall have a small loop at the end as shown in Figure 3. The loop, shaped like a semicircle, is affixed to the cross-sectional part of the outer conductor via soldering at its terminal point. The plane of the loop shall be set parallel to that of the HTS films in order to suppress the unwanted TM_{mn0} modes. The coupling loops shall be carefully checked prior to the measurements to keep the good coupling conditions. For measuring the Q values as a function of temperature, these cables can be moved to the right or to the left to maintain the insertion attenuation (IA) slightly higher than 20 dB at the lowest temperature, with the vertical position of each loop fixed in the middle of the sapphire rod. The distance between the loop and the sapphire rod should be adjusted to a smaller value if the resonant signal gets too noisy at higher temperatures. In this adjustment, coupling of unwanted cavity modes to the interested dielectric resonance mode shall be suppressed. Unwanted, parasitic coupling to the other modes not only reduces the high- Q value of the TE mode resonator but also increases uncertainty in the measured resonant frequency of the TE mode resonator, making it difficult to measure changes in the resonant frequency vs. temperature data with accuracy. For collecting the temperature dependence of the resonant frequency data, the distance between the loop and the sapphire rod should not be changed during measurements. In this case, IA at the lowest temperature can be lower than 20 dB.

For suppressing the parasitic coupling, dielectric resonators shall be designed in such a way that the frequencies of the resonance modes of interest are well separated from those of nearby parasitic modes. The dielectric rod should be fixed at the centre of the bottom superconductor film by using low-loss glue. A small drop of glue applied to the surface of the bottom superconductor is enough to attach the film to the dielectric rod. It is noted that effects of glue on the measured Q -value should be negligible.


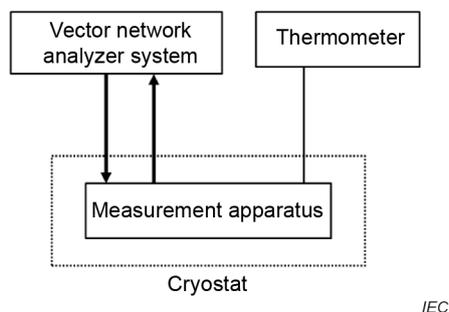


Figure 1 – Schematic diagram for the measurement equipment for the intrinsic Z_S of HTS films at cryogenic temperatures

Sample Document

get full document from standards.iteh.ai

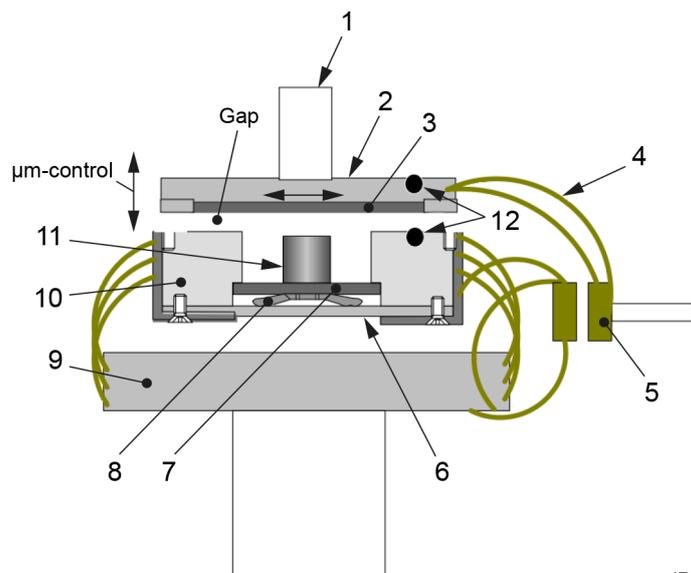


IEC

Key

- 1 polytetrafluoroethylene rod
- 2 Cu plate
- 3 superconductor (or metal) film
- 4 Cu wire
- 5 switch for thermal connection
- 6 Cu plate
- 7 superconductor (or metal) film
- 8 Be-Cu spring
- 9 cold finger
- 10 Cu cavity
- 11 dielectric rod
- 12 temperature sensor

Figure 2 – Schematic diagram of a dielectric resonator with a switch for thermal connection

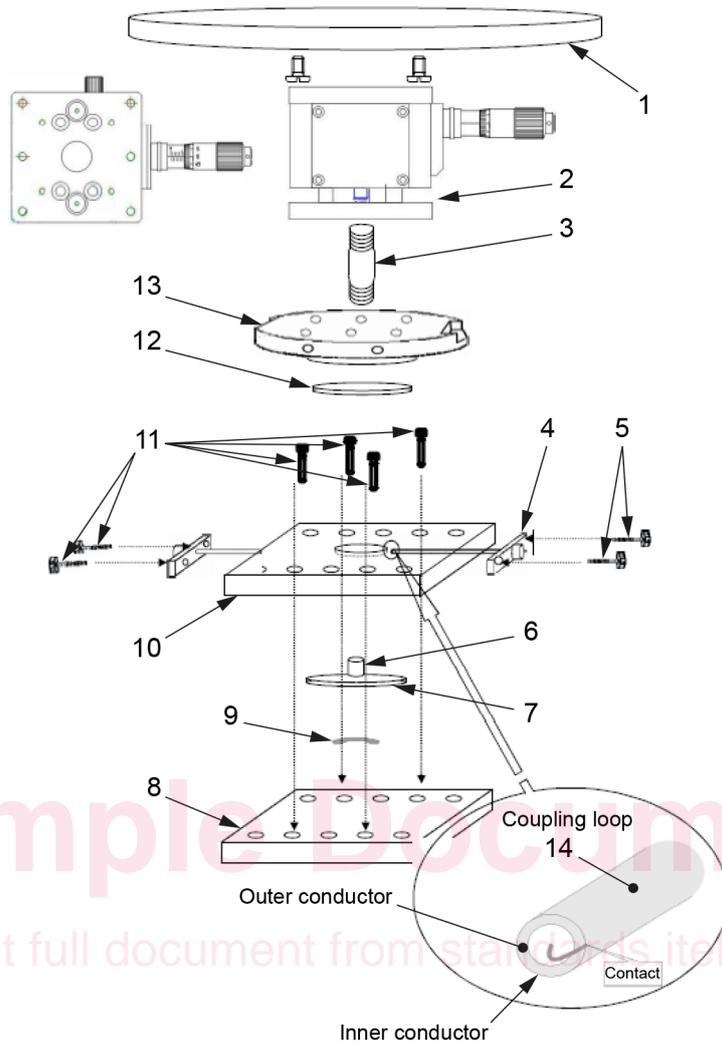

IEC

Key

- | | | |
|---------------------------------|-----------------------|-----------------------------|
| 1 acryl plate | 6 dielectric rod | 11 screw |
| 2 z-axis stage | 7 superconductor film | 12 superconductor film |
| 3 polytetrafluoroethylene screw | 8 Cu plate | 13 Cu plate |
| 4 connector | 9 Be-Cu spring | 14 semi-rigid coaxial cable |
| 5 screw | 10 Cu plate | |

Figure 3 – Typical dielectric resonator with a movable top plate