

TECHNICAL REPORT



Field device tool (FDT) interface specification –
Part 51-90: Communication implementation for common object model –
IEC 61784 CPF 9

PREVIEW
(standards.iteh.ai)
IEC TR 62453-51-90:2017
<https://standards.iteh.ai/catalog/standards/sist/818d854d-c654-4bd9-8132-45f05481e10e/iec-tr-62453-51-90-2017>



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2017 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
Fax: +41 22 919 03 00
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing 20 000 terms and definitions in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC publications search - www.iec.ch/searchpub

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Glossary - std.iec.ch/glossary

65 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email. <https://standards.iteh.ai/catalog/standards/sstd/iec>

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: csc@iec.ch

8132-4505481e10e/iec-t-02453-51-90-2017

TECHNICAL REPORT



**Field device tool (FDT) interface specification –
Part 51-90: Communication implementation for common object model –
IEC 61784 CPF 9**

ITh STANDARD PREVIEW
(standards.iteh.ai)
<https://standards.iteh.ai/catalog/standards/sist/818d854d-c654-4bd9-8132-45f05481e10e/iec-tr-62453-51-90-2017>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 25.040.40; 35.110.05; 35.110

ISBN 978-2-8322-4328-2

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD.....	3
INTRODUCTION.....	5
1 Scope.....	6
2 Normative references	6
3 Terms, definitions, symbols, abbreviated terms and conventions	6
3.1 Terms and definitions.....	6
3.2 Symbols and abbreviated terms	7
3.3 Conventions.....	7
3.3.1 Data type names and references to data types	7
3.3.2 Vocabulary for requirements	7
4 Bus category	7
5 Access to instance and device data	7
6 Protocol specific usage of general data types	7
7 Protocol specific common data types	8
8 Network management data types	8
8.1 General.....	8
8.2 HART device address	8
9 Communication data types.....	8
9.1 General.....	8
9.2 General communication – FDTHARTCommunicationSchema	8
9.3 ConnectRequest for ‘Extended_HART’ protocols	12
10 Channel parameter data types – FDTHARTChannelParameterSchema.....	13
11 Device identification	15
11.1 Device type identification data types –	15
11.1.1 Identification schema for protocol ‘HART’ – FDTHARTIdentSchema	15
11.1.2 Identification schema for ‘Extended_HART’ protocols – FDTHART_ExtendedIdentSchema	16
11.2 Topology scan data types – DTMHARTDeviceSchema.....	16
11.3 Scan identification data types	18
11.3.1 General	18
11.3.2 Scan for protocol ‘HART’ – FDTHARTScanIdentSchema	18
11.3.3 Scan for ‘Extended_HART’ protocols – FDTHART_ExtendedScanIdentSchema	19
11.4 Device type identification data types	21
11.4.1 General	21
11.4.2 Identification for protocol ‘HART’ – FDTHARTDeviceIdentSchema.....	21
11.4.3 Identification for ‘Extended_HART’ protocols – FDTHART_ExtendedDeviceIdentSchema	22
11.5 XSLT Transformation	23
11.5.1 XSLT Transformation for protocol ‘HART’	23
11.5.2 Transformation for ‘Extended_HART’ protocols.....	29
Bibliography.....	35
Figure 1 – Part 51-90 of the IEC 62453 series	5
Table 1 – Protocol specific usage of general data types.....	8

INTERNATIONAL ELECTROTECHNICAL COMMISSION

FIELD DEVICE TOOL (FDT) INTERFACE SPECIFICATION –

Part 51-90: Communication implementation for common object model – IEC 61784 CPF 9

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
<https://standards.iteh.ai/catalog/standards/sist/818d854d-c654-4bd9-818d854d-c654-4bd9>
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

The main task of IEC technical committees is to prepare International Standards. However, a technical committee may propose the publication of a technical report when it has collected data of a different kind from that which is normally published as an International Standard, for example "state of the art".

IEC TR 62453-51-90, which is a technical report, has been prepared by subcommittee 65E: Devices and integration in enterprise systems, of IEC technical committee 65: Industrial-process management, control and automation.

This document cancels and replaces IEC TR 62453-509 published in 2009. This edition constitutes a technical revision. The main changes provide support for the updated HART protocol.

Each part of the IEC 62453-51-xy series is intended to be read in conjunction with its corresponding part in the IEC 62453-3xy series. This document corresponds to IEC 63453-309.

The text of this technical report is based on the following documents:

Enquiry draft	Report on voting
65E/440/DTR	65E/514/RVC

Full information on the voting for the approval of this technical report can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

The list of all parts of the IEC 62453 series, under the general title *Field device tool (FDT) interface specification*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

A bilingual version of this publication may be issued at a later date.

<https://standards.iteh.ai/catalog/standards/sist/818d854d-c654-4bd9-8132-45f05481e10e/iec-tr-62453-51-90-2017>

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION

This part of IEC 62453 is an interface specification for developers of Field Device Tool (FDT) components for function control and data access within a client/server architecture. The specification is a result of an analysis and design process to develop standard interfaces to facilitate the development of servers and clients by multiple vendors that need to interoperate seamlessly.

With the integration of fieldbuses into control systems, there are a few other tasks which need to be performed. In addition to fieldbus- and device-specific tools, there is a need to integrate these tools into higher-level system-wide planning or engineering tools. In particular, for use in extensive and heterogeneous control systems, typically in the area of the process industry, the unambiguous definition of engineering interfaces that are easy to use for all those involved is of great importance.

A device-specific software component, called Device Type Manager (DTM), is supplied by the field device manufacturer with its device. The DTM is integrated into engineering tools via the FDT interfaces defined in this specification. The approach to integration is in general open for all kind of fieldbuses and thus meets the requirements for integrating different kinds of devices into heterogeneous control systems.

Figure 1 shows how this part of IEC 62453-51-xy series is aligned in the structure of the IEC 62453 series.

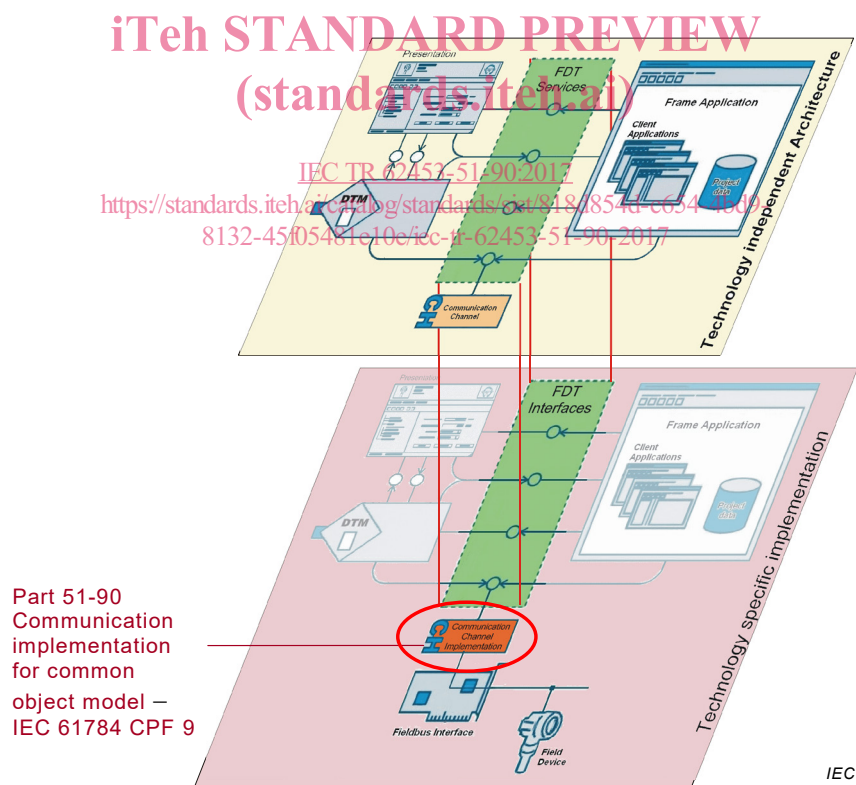


Figure 1 – Part 51-90 of the IEC 62453 series

FIELD DEVICE TOOL (FDT) INTERFACE SPECIFICATION –

Part 51-90: Communication implementation for common object model – IEC 61784 CPF 9

1 Scope

This part of the IEC 62453-51-xy series, which is a Technical Report, provides information for integrating the HART®¹ technology into the COM-based implementation of FDT interface specification (IEC TR 62453-41).

This part of IEC 62453 specifies the implementation of communication and other services based on IEC 62453-309.

This document neither contains the FDT specification nor modifies it.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61784-1:2014, *Industrial communication networks – Profiles – Part 1: Fieldbus profiles*
[https://standards.iteh.ai/catalog/standards/sist/818d854d-c654-4bd9-](https://standards.iteh.ai/catalog/standards/sist/818d854d-c654-4bd9-8132-4505481119e/iec-tr-62453-51-90-2017)

IEC 62453-1:2016, *Field device tool (FDT) interface specification – Part 1: Overview and guidance*

IEC 62453-2:2016, *Field device tool (FDT) interface specification – Part 2: Concepts and detailed description*

IEC TR 62453-41:2016, *Field device tool (FDT) interface specification – Part 41: Object model integration profile – Common object model*

IEC 62453-309:2016, *Field device tool (FDT) interface specification – Part 309: Communication profile integration – IEC 61784 CPF 9*

3 Terms, definitions, symbols, abbreviated terms and conventions

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 62453-1, IEC 62453-2, IEC TR 62453-41 and IEC 62453-309 apply.

¹ HART ® is the trade name of a product supplied by HART Communication Foundation. This information is given for convenience of users of this document and does not constitute an endorsement by IEC of the product named. Equivalent products may be used if they can be shown to lead to the same results.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.2 Symbols and abbreviated terms

For the purposes of this document, the symbols and abbreviations given in IEC 62453-1, IEC 62453-2, IEC 62453-309, and IEC TR 62453-41 apply.

3.3 Conventions

3.3.1 Data type names and references to data types

The conventions for naming and referencing of data types are explained in IEC 62453-2:2016, Clause A.1.

3.3.2 Vocabulary for requirements

The following expressions are used when specifying requirements.

Usage of “shall” or “mandatory” No exceptions allowed.

Usage of “should” or “recommended” Strong recommendation. It may make sense in special exceptional cases to differ from the described behaviour.

Usage of “can” or “optional” Function or behaviour may be provided, depending on defined conditions.

IEC TR 62453-51-90:2017
<https://standards.iteh.ai/catalog/standards/sis/818d654d-c654-46d9-8132-45f05481e10e/iec-tr-62453-51-90-2017>

4 Bus category

IEC 61784 CPF 9 protocol is identified in the attribute busCategory of the BusCategory element by the identifiers, as specified in IEC 62453-309.

5 Access to instance and device data

Used at methods:

- IDtmParameter methods
- IDtmSingleDeviceDataAccess methods
- IDtmSingleInstanceDataAccess methods

These methods (if supported according IEC TR 62453-41) shall provide access to at least all parameters defined in IEC 62453-309.

6 Protocol specific usage of general data types

Table 1 shows how general data types are used with IEC 61784 CPF 9 devices.

Table 1 – Protocol specific usage of general data types

Attribute	Description for use
fdt:address	All these attributes of the FDTDatatype schema are used as defined in IEC 62453-309.
fdt:protocolId	
fdt:deviceTypeId	
fdt:deviceTypeInfo	
fdt:deviceTypeInfoPath	
fdt:manufacturerId	
fdt:semanticId	
fdt:applicationDomain	
fdt:tag	

7 Protocol specific common data types

This clause specifies the protocol specific common data types, which are used in the definition of other data types.

The data types described in this clause are defined for the following namespace:

Namespace: <namespace identifier>

8 Network management data types

8.1 General

[IEC TR 62453-51-90:2017](https://standards.iteh.ai/catalog/standards/sist/818d854d-c654-4bd9-8183-258548105e10/iec-62453-51-90-2017)

[https://standards.iteh.ai/catalog/standards/sist/818d854d-c654-4bd9-](https://standards.iteh.ai/catalog/standards/sist/818d854d-c654-4bd9-8183-258548105e10/iec-62453-51-90-2017)

The data types specified in this clause are used at following methods:

- IDtmParameter:GetParameters
- IDtmParameter:SetParameters

8.2 HART device address

The element <BusInformation/@slaveAddress> (defined in IEC TR 62453-41) is used for defining the network address of a device.

9 Communication data types

9.1 General

The data types specified in this clause are used with the methods of IFdtCommunication.

The definition of the attribute follows the data type definition as defined in IEC 62453-309.

9.2 General communication – FDTHARTCommunicationSchema

This schema is used for communication of all protocols.

```
<Schema name="FDTHARTCommunicationSchema" xmlns="urn:schemas-microsoft-com:xml-data" xmlns:dt="urn:schemas-microsoft-com:datatypes" xmlns:fdt="x-schema:FDTDataTypesSchema.xml">
```

```
<!--Definition of Attributes-->
```

```
<AttributeType name="schemaVersion" dt:type="number" default="1.21"/>
```

```
<AttributeType name="address1" dt:type="ui1"/>
```

```
<AttributeType name="address2" dt:type="ui1"/>
```

```
<AttributeType name="address3" dt:type="ui1"/>
```

```

<AttributeType name="commandNumber" dt:type="ui1"/>
<AttributeType name="communicationReference" dt:type="uuid"/>
<AttributeType name="deviceStatus" dt:type="ui1"/>
<AttributeType name="deviceTypeId" dt:type="ui1"/>
<AttributeType name="longFrameRequired" dt:type="boolean"/>
<AttributeType name="manufacturerId" dt:type="ui1"/>
<AttributeType name="preambleCount" dt:type="ui1"/>
<AttributeType name="primaryMaster" dt:type="boolean"/>
<AttributeType name="shortAddress" dt:type="ui1"/>
<AttributeType name="value" dt:type="ui1"/>
<AttributeType name="sequenceTime" dt:type="ui4"/>
<AttributeType name="delayTime" dt:type="ui4"/>
<AttributeType name="burstFrame" dt:type="boolean"/>
<AttributeType name="burstModeDetected" dt:type="boolean"/>

<!--Definition of Elements-->
<ElementType name="CommunicationStatus" content="empty" model="closed">
  <attribute type="fdt:nodeld" required="no"/>
  <attribute type="value" required="yes"/>
</ElementType>
<ElementType name="CommandResponse" content="empty" model="closed">
  <attribute type="fdt:nodeld" required="no"/>
  <attribute type="value" required="yes"/>
</ElementType>
<ElementType name="Status" content="eltOnly" model="closed">
  <attribute type="fdt:nodeld" required="no"/>
  <attribute type="deviceStatus" required="yes"/>
  <group order="one" minOccurs="1" maxOccurs="1">
    <element type="CommunicationStatus"/>
    <element type="CommandResponse"/>
  </group>
</ElementType>
<ElementType name="LongAddress" content="empty" model="closed">
  <attribute type="fdt:nodeld" required="no"/>
  <attribute type="manufacturerId" required="yes"/>
  <attribute type="deviceTypeId" required="yes"/>
  <attribute type="address1" required="yes"/>
  <attribute type="address2" required="yes"/>
  <attribute type="address3" required="yes"/>
</ElementType>
<ElementType name="ShortAddress" content="empty" model="closed">
  <attribute type="fdt:nodeld" required="no"/>
  <attribute type="shortAddress" required="yes"/>
</ElementType>
<ElementType name="ConnectRequest" content="eltOnly" model="closed">
  <attribute type="fdt:nodeld" required="no"/>
  <attribute type="fdt:tag" required="yes"/>
  <attribute type="preambleCount" required="no"/>
  <attribute type="primaryMaster" required="no"/>
  <attribute type="longFrameRequired" required="no"/>
  <attribute type="fdt:systemTag" required="no"/>
  <element type="LongAddress" minOccurs="0" maxOccurs="1"/>
  <element type="ShortAddress" minOccurs="1" maxOccurs="1"/>
</ElementType>
<ElementType name="ConnectResponse" content="eltOnly" model="closed">
  <attribute type="fdt:nodeld" required="no"/>
  <attribute type="fdt:tag" required="yes"/>
  <attribute type="preambleCount" required="yes"/>
  <attribute type="primaryMaster" required="yes"/>
  <attribute type="communicationReference" required="yes"/>
  <element type="LongAddress" minOccurs="0" maxOccurs="1"/>
  <element type="ShortAddress" minOccurs="1" maxOccurs="1"/>
</ElementType>
<ElementType name="DisconnectRequest" content="empty" model="closed">
  <attribute type="fdt:nodeld" required="no"/>
  <attribute type="communicationReference" required="yes"/>
</ElementType>
<ElementType name="DisconnectResponse" content="empty" model="closed">
  <attribute type="fdt:nodeld" required="no"/>
  <attribute type="communicationReference" required="yes"/>

```

```

</ElementType>
<ElementType name="DataExchangeRequest" content="eltOnly" model="closed">
  <attribute type="fdt:nodId" required="no"/>
  <attribute type="commandNumber" required="yes"/>
  <attribute type="communicationReference" required="yes"/>
  <element type="fdt:CommunicationData" minOccurs="0" maxOccurs="1"/>
</ElementType>
<ElementType name="DataExchangeResponse" content="eltOnly" model="closed">
  <attribute type="fdt:nodId" required="no"/>
  <attribute type="commandNumber" required="yes"/>
  <attribute type="communicationReference" required="yes"/>
  <attribute type="burstFrame" required="no"/>
  <element type="fdt:CommunicationData" minOccurs="0" maxOccurs="1"/>
  <element type="Status" minOccurs="1" maxOccurs="1"/>
</ElementType>
<ElementType name="SequenceBegin" content="empty" model="closed">
  <attribute type="sequenceTime" required="no"/>
  <attribute type="delayTime" required="no"/>
  <attribute type="communicationReference" required="yes"/>
</ElementType>
<ElementType name="SequenceEnd" content="empty" model="closed">
  <attribute type="communicationReference" required="yes"/>
</ElementType>
<ElementType name="SequenceStart" content="empty" model="closed">
  <attribute type="communicationReference" required="yes"/>
</ElementType>
<ElementType name="Abort" content="empty" model="closed">
  <attribute type="communicationReference" required="no"/>
</ElementType>
<ElementType name="SubscribeRequest" content="empty" model="closed">
  <attribute type="fdt:nodId" required="no"/>
  <attribute type="communicationReference" required="yes"/>
</ElementType>
<ElementType name="SubscribeResponse" content="empty" model="closed">
  <attribute type="fdt:nodId" required="no"/>
  <attribute type="communicationReference" required="yes"/>
  <attribute type="burstModeDetected" required="yes"/>
  <attribute type="fdt:communicationError" required="no"/>
</ElementType>
<ElementType name="UnsubscribeRequest" content="empty" model="closed">
  <attribute type="fdt:nodId" required="no"/>
  <attribute type="communicationReference" required="yes"/>
</ElementType>
<ElementType name="UnsubscribeResponse" content="empty" model="closed">
  <attribute type="fdt:nodId" required="no"/>
  <attribute type="communicationReference" required="yes"/>
  <attribute type="fdt:communicationError" required="no"/>
</ElementType>
<ElementType name="FDT" content="eltOnly" model="closed">
  <attribute type="schemaVersion" required="no"/>
  <attribute type="fdt:nodId" required="no"/>
  <group order="one" minOccurs="1" maxOccurs="1">
    <element type="ConnectRequest"/>
    <element type="ConnectResponse"/>
    <element type="DisconnectRequest"/>
    <element type="DisconnectResponse"/>
    <element type="DataExchangeRequest"/>
    <element type="DataExchangeResponse"/>
    <element type="SequenceBegin"/>
    <element type="SequenceEnd"/>
    <element type="SequenceStart"/>
    <element type="Abort"/>
    <element type="SubscribeRequest"/>
    <element type="SubscribeResponse"/>
    <element type="UnsubscribeRequest"/>
    <element type="UnsubscribeResponse"/>
    <element type="fdt:CommunicationError"/>
  </group>
</ElementType>
</Schema>

```

STANDARD PREVIEW
(standards.iteh.ai)

IEC TR 62453-51-90:2017
<https://standards.iteh.ai/catalog/standards/sist/818d854d-c654-4bd9-823d-45f07d41-1467/iec-tr-62453-51-90-2017>

EXAMPLE:

```

<?xml version="1.0"?>
<FDT xmlns="x-schema:FDTHARTCommunicationSchema.xml" xmlns:fdt="x-schema:FDTDataTypesSchema.xml"
schemaVersion="1.21">
  <DataExchangeRequest fdt:nodeId="myId" commandNumber="42"
  communicationReference="6B29FC40-CA47-1067-B31D-00DD010662DA"/>
</FDT>

<?xml version="1.0"?>
<FDT xmlns="x-schema:FDTHARTCommunicationSchema.xml" xmlns:fdt="x-schema:FDTDataTypesSchema.xml"
schemaVersion="1.21">
  <DataExchangeResponse commandNumber="1" communicationReference="6B29FC40-CA47-1067-B31D-00DD010662DA">
    <fdt:CommunicationData byteArray="ff02"/>
    <Status deviceStatus="0">
      <CommandResponse value="1"/>
    </Status>
  </DataExchangeResponse>
</FDT>

```

Examples for IEC 61784 CPF 9 burst mode are given below.

The request from the DeviceDTM:

```

<?xml version="1.0"?>
<FDT xmlns="x-schema:FDTHARTCommunicationSchema.xml" xmlns:fdt="x-schema:FDTDataTypesSchema.xml">
  <SubscribeRequest fdt:nodeId="myId" communicationReference="6B29FC40-CA47-1067-B31D-00DD010662DA"/>
</FDT>

```

Answer if the device is already in burst mode:

```

<?xml version="1.0"?>
<FDT xmlns="x-schema:FDTHARTCommunicationSchema.xml" xmlns:fdt="x-schema:FDTDataTypesSchema.xml">
  <SubscribeResponse communicationReference="6B29FC40-CA47-1067-B31D-00DD010662DA"
  burstModeDetected="1"/>
</FDT>

```

Receiving a burst frame:

```

<FDT xmlns="x-schema:FDTHARTCommunicationSchema.xml" xmlns:fdt="x-schema:FDTDataTypesSchema.xml">
  <DataExchangeResponse commandNumber="1" communicationReference="6B29FC40-CA47-1067-B31D-00DD010662DA"
  burstFrame="1">
    <fdt:CommunicationData byteArray="ff02"/>
    <Status deviceStatus="0">
      <CommandResponse value="1"/>
    </Status>
  </DataExchangeResponse>
</FDT>

```

Unsubscribing:

```

<FDT xmlns="x-schema:FDTHARTCommunicationSchema.xml" xmlns:fdt="x-schema:FDTDataTypesSchema.xml">
  <UnsubscribeRequest fdt:nodeId="myId" communicationReference="6B29FC40-CA47-1067-B31D-00DD010662DA"/>
</FDT>

```

Answer to unsubscribe:

```

<?xml version="1.0"?>
<FDT xmlns="x-schema:FDTHARTCommunicationSchema.xml" xmlns:fdt="x-schema:FDTDataTypesSchema.xml">
  <UnsubscribeResponse communicationReference="6B29FC40-CA47-1067-B31D-00DD010662DA" />
</FDT>

```