

INTERNATIONAL STANDARD

NORME INTERNATIONALE



Optical fibres – **iTeh STANDARD PREVIEW**
Part 1-40: Attenuation measurement methods
(standards.iteh.ai)

Fibres optiques –
Partie 1-40: Méthodes de mesurage de l'affaiblissement
<https://standards.iteh.ai/catalog/standards/sist/63057506-1494-42dc-93fd-d7177fe8d9ef/iec-60793-1-40-2019>



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2019 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22,000 terminological entries in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

67,000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC -

webstore.iec.ch/advsearchform

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études,...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

Electropedia - www.electropedia.org

Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 000 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 16 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

Glossaire IEC - std.iec.ch/glossary

67 000 entrées terminologiques électrotechniques, en anglais et en français, extraites des articles Termes et Définitions des publications IEC parues depuis 2002. Plus certaines entrées antérieures extraites des publications des CE 37, 77, 86 et CISPR de l'IEC.



IEC 60793-1-40

Edition 2.0 2019-03

INTERNATIONAL STANDARD

NORME INTERNATIONALE



Optical fibres – **iTeh STANDARD PREVIEW**
Part 1-40: Attenuation measurement methods
(standards.iteh.ai)

Fibres optiques –
Partie 1-40: Méthodes de mesurage de l'affaiblissement
IEC 60793-1-40:2019
d7177fe8d9ef/iec-60793-1-40-2019

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 33.180.10

ISBN 978-2-8322-6593-2

Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.

CONTENTS

FOREWORD.....	5
1 Scope.....	7
2 Normative references	7
3 Terms and definitions	8
4 Calibration requirements.....	9
5 Reference test method	9
6 Apparatus.....	9
7 Sampling and specimens.....	9
7.1 Specimen length	9
7.2 Specimen end face	9
8 Procedure.....	9
9 Calculations.....	9
9.1 Methods A and B	9
9.2 Method C	9
9.3 Method D	9
10 Results.....	9
10.1 Information available with each measurement.....	9
10.2 Information available upon request	10
10.3 Method-specific additional information	10
11 Specification information	10
Annex A (normative) Requirements specific to method A – Cut-back	11
A.1 General.....	11
A.2 Apparatus	11
A.2.1 General apparatus for all fibres.....	11
A.2.2 Launch apparatus for all single-mode fibres.....	13
A.2.3 Launch apparatus for A1 multimode fibres	14
A.2.4 Launch apparatus for A2 to A4 multimode fibres	16
A.2.5 Calibration requirements.....	17
A.3 Procedure	18
A.4 Calculations	18
Annex B (normative) Requirements specific to method B – Insertion loss.....	19
B.1 General.....	19
B.2 Apparatus	19
B.2.1 General set-ups	19
B.2.2 Apparatus common to method A (cut-back).....	19
B.2.3 Additional apparatus specific to method B (insertion-loss)	19
B.2.4 Calibration requirements.....	19
B.3 Procedure	19
B.4 Calculations	20
Annex C (normative) Requirements specific to method C – Backscattering	21
C.1 General.....	21
C.2 Apparatus	21
C.2.1 General	21
C.2.2 Optical transmitter	22
C.2.3 Launch conditions.....	22

C.2.4	Optical splitter	22
C.2.5	Optical receiver	22
C.2.6	Pulse duration and repetition rate	22
C.2.7	Signal processor.....	22
C.2.8	Display	23
C.2.9	Data interface (optional)	23
C.2.10	Reflection controller (optional).....	23
C.2.11	Splices and connectors.....	23
C.3	Sampling and specimens	23
C.4	Procedure	23
C.4.1	General	23
C.4.2	Further steps for measuring attenuation.....	25
C.4.3	Further steps for measuring point discontinuities	25
C.4.4	Calibration.....	27
C.5	Calculations	27
C.6	Results	27
Annex D (normative)	Requirements specific to method D – Spectral attenuation modelling	28
D.1	General.....	28
D.2	Apparatus	28
D.3	Sampling and specimens	28
D.4	Procedure	28
D.5	Calculations	29
D.6	Results	29
Annex E (informative)	Examples of short cable test results on A1 multimode fibres	31
Bibliography	33
Figure A.1	– Arrangement of equipment for loss measurement at a specified wavelength	11
Figure A.2	– Arrangement of equipment used to obtain loss spectrum	12
Figure A.3	– General launch arrangement.....	12
Figure A.4	– Limited phase space launch optics.....	15
Figure A.5	– Two examples of optical fibre scramblers.....	16
Figure A.6	– Lens system	16
Figure A.7	– Launch fibre.....	17
Figure A.8	– Mode scrambler (for A.4 fibre)	17
Figure A.9	– A wide-spectrum source (line "b") could lead to attenuation measurement errors due to sharp variations on spectral attenuation of polymer-core fibres (line "a").....	18
Figure B.1	– Calibration of insertion loss measurement set	20
Figure B.2	– Measurement of insertion loss	20
Figure C.1	– Block diagram of an OTDR	21
Figure C.2	– Schematic OTDR trace for a "uniform" specimen preceded by a dead-zone fibre	24
Figure C.3	– Schematic OTDR trace for a "uniform" specimen not preceded by a dead-zone fibre	24
Figure C.4	– Schematic OTDR trace showing apparent loss due to point discontinuities, one reflective and one non-reflective	26

Figure C.5 – Schematic of an expanded OTDR trace showing two point discontinuities, one with apparent gain, and another with no apparent loss or gain 26

Figure E.1 – Example of attenuation coefficient tests on A1a.1 fibre 31

Figure E.2 – Example of attenuation coefficient tests on A1a.3 fibre 31

Figure E.3 – Example of attenuation coefficient tests on A1b fibre 32

Table A.1 – Size examples 15

Table A.2 – Launch conditions for A2 to A4 fibres 16

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[IEC 60793-1-40:2019](#)

<https://standards.iteh.ai/catalog/standards/sist/b565750b-f494-42dc-93fd-d7177fe8d9ef/iec-60793-1-40-2019>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

OPTICAL FIBRES –

Part 1-40: Attenuation measurement methods

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
<http://standards.iteh.ai/catalog/standards/si/1565750b-f194-4241-9361-71ac93a10000/iec-60793-1-40-2019>
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 60793-1-40 has been prepared by subcommittee 86A: Fibres and cables, of IEC technical committee 86: Fibre optics.

This second edition cancels and replaces the first edition published in 2001. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) Improvement of the description of measurement details for B6 fibre;
- b) Improvement of the calibration requirements for A4 fibre;
- c) Introduction of Annex E describing examples of short cable test results on A1 multimode fibres.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
86A/1909/FDIS	86A/1927/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 60793 series, published under the general title *Optical fibres*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

iTeh STANDARD PREVIEW

(standards.iteh.ai)

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

<https://standards.iteh.ai/catalog/standards/sist/b565750b-f494-42dc-93fd-d7177e8d9ef/iec-60793-1-40-2019>

OPTICAL FIBRES –

Part 1-40: Attenuation measurement methods

1 Scope

This part of IEC 60793 establishes uniform requirements for measuring the attenuation of optical fibre, thereby assisting in the inspection of fibres and cables for commercial purposes.

Four methods are described for measuring attenuation, one being that for modelling spectral attenuation:

- method A: cut-back;
- method B: insertion loss;
- method C: backscattering;
- method D: modelling spectral attenuation.

Methods A to C apply to the measurement of attenuation for all categories of the following fibres:

- class A multimode fibres;
- class B single-mode fibres.

Method C, backscattering, also covers the location, losses and characterization of point discontinuities.

Method D is applicable only to class B fibres.

Information common to all four methods appears in Clauses 1 to 11, and information pertaining to each individual method appears in Annexes A, B, C, and D, respectively.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60793-1-1, *Optical fibres – Part 1-1: Measurement methods and test procedures – General and guidance*

IEC 60793-1-22, *Optical fibres – Part 1-22: Measurement methods and test procedures – Length measurement*

IEC 60793-1-43, *Optical fibres – Part 1-43: Measurement methods and test procedures – Numerical aperture measurement*

IEC 61746-1, *Calibration of optical time-domain reflectometers (OTDR) – Part 1: OTDR for single mode fibres*

IEC 61746-2, *Calibration of optical time-domain reflectometers (OTDR) – Part 2: OTDR for multimode fibres*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 60793-1-1 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1

attenuation

attenuation of a fibre at wavelength λ between two cross-sections, 1 and 2, separated by a distance and defined as

$$A(\lambda) = \left| 10 \log_{10} \frac{P_1(\lambda)}{P_2(\lambda)} \right| \quad (1)$$

where

$A(\lambda)$ is the attenuation, in dB, at wavelength λ ;

$P_1(\lambda)$ is the optical power traversing cross-section 1;

$P_2(\lambda)$ is the optical power traversing cross-section 2.

Note 1 to entry: Attenuation is a measure of the decreasing optical power in a fibre at a given wavelength. It depends on the nature and length of the fibre and is also affected by measurement conditions.

<https://standards.iteh.ai/catalog/standards/sist/b565750b-f494-42dc-93fd-d7177fe8d9ef/iec-60793-1-40-2019>

3.2

attenuation coefficient

attenuation per unit length for a uniform fibre under steady-state conditions

Note 1 to entry: It is possible to define the attenuation per unit length or the attenuation coefficient as follows:

$$\alpha(\lambda) = \frac{A(\lambda)}{L} \quad (2)$$

which is independent of the chosen length of the fibre,

where

$\alpha(\lambda)$ is the attenuation coefficient;

$A(\lambda)$ is the attenuation at wavelength λ ;

L is the length, in kilometres.

Note 2 to entry: Uncontrolled launching conditions normally excite higher order lossy modes that produce transient losses and result in attenuation that is not proportional to the length of the fibre. A controlled, steady-state launching condition yields attenuation that is proportional to the fibre's length. Under steady-state conditions, an attenuation coefficient of a fibre can be determined and the attenuation of concatenated fibres added linearly.

3.3

spectral attenuation modelling

technique that predicts the attenuation coefficients across a spectrum of wavelengths from a small number (three to five) of discrete values measured directly at different wavelengths

3.4

point discontinuity

temporary or permanent local deviation of the continuous optical time-domain reflectometer (OTDR) signal in the upward or downward direction

Note 1 to entry: The nature of the deviation can vary with test conditions (e.g. pulse duration, wavelength, and direction of the OTDR signal). Although a point discontinuity can have a length greater than the corresponding displayed pulse duration (including transmitter and receiver effects), the length is usually about equal to the pulse duration. For a correct interpretation, the guidelines in IEC 60793-1-22 should be followed for measuring length.

4 Calibration requirements

See Annexes A, B, and C for methods A, B, and C, respectively.

5 Reference test method

Method A, cut-back, is the reference test method (RTM), which shall be the one used to settle disputes.

6 Apparatus

Annexes A, B, C, and D include layout drawings and other equipment requirements for each of the methods, respectively.

7 Sampling and specimens

7.1 Specimen length

The specimen shall be a known length of fibre on a reel, or within a cable, as specified in the detail specification.

7.2 Specimen end face

Prepare a flat end face, orthogonal to the fibre axis, at the input and output ends of each specimen.

8 Procedure

See Annexes A, B, C and D for methods A, B, C and D, respectively.

9 Calculations

9.1 Methods A and B

Methods A and B, cut-back and insertion loss use Equations (1) and (2) respectively, which appear in 3.1 and 3.2.

9.2 Method C

See Annex C.

9.3 Method D

See Annex D.

10 Results

10.1 Information available with each measurement

Report the following information with each measurement:

- date and title of measurement;
- identification of specimen;
- optical source wavelength;
- specimen length;
- spectral attenuation, in dB, or attenuation coefficient, in dB/km, versus wavelength or at specific wavelength(s), as required by the detail specification.

10.2 Information available upon request

The following information shall be available upon request:

- measurement method used: A, B, C, or D;
- type of optical source used: centroidal wavelength(s) and spectral width(s);
- launching technique and conditions used;
- indication if a dead-zone fibre was used (for method C only);
- description of all key equipment;
- for type B fibres – dimensions and number of turns of the mode filter or mode scrambler;
- pulse duration(s), scale range(s), and signal-averaging details;
- details of computation technique (calculation method);
- any deviations to the procedure that were made;
- date of latest calibration of measurement equipment.

10.3 Method-specific additional information

For methods C and D, see the additional requirements in Clauses C.6 and D.6, respectively. This particularly applies when using method C for measuring point discontinuities.

11 Specification information

The detail specification shall specify the following information:

- type of fibre (or cable) to be measured;
- failure or acceptance criteria at the wavelength or wavelength range;
- any deviations to the procedure that apply;
- information to be reported.

Annex A (normative)

Requirements specific to method A – Cut-back

A.1 General

The cut-back technique is the only method directly derived from the definition of fibre attenuation, in which the power levels, $P_1(\lambda)$ and $P_2(\lambda)$, are measured at two points of the fibre without change of input conditions. $P_2(\lambda)$ is the power emerging from the end of the fibre, and $P_1(\lambda)$ is the power emerging from a point near the input after cutting the fibre. This explains its wide acceptance as the reference test method for attenuation.


This measurement principle does not permit information to be obtained on the attenuation behaviour over the length of the fibre, nor is it easy to measure the change of attenuation under changing conditions. In some situations, its destructive nature is a disadvantage.

A.2 Apparatus

A.2.1 General apparatus for all fibres

A.2.1.1 General

See Figures A.1 and A.2 for diagrams of suitable test set-ups.

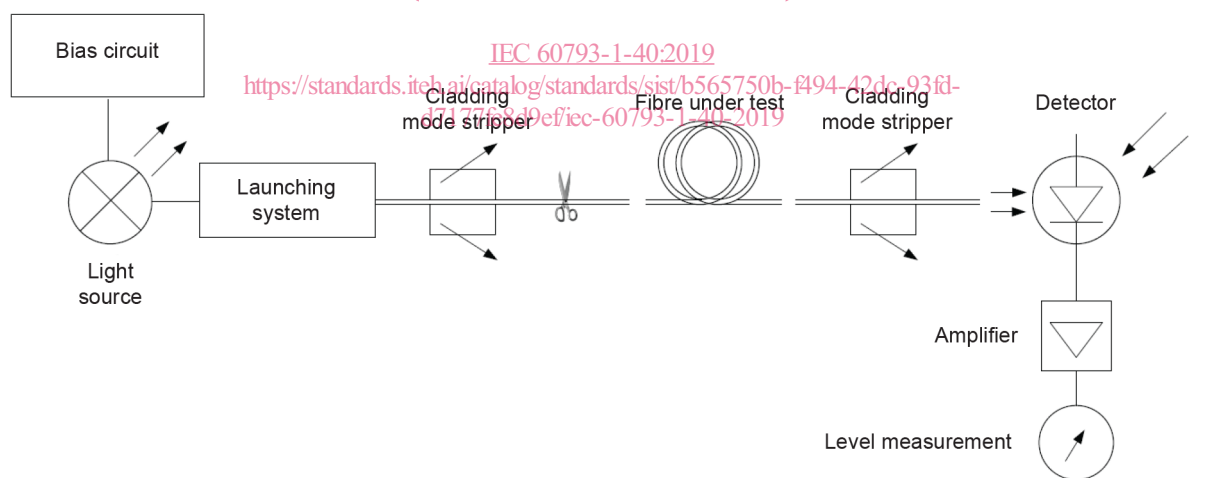

IEC

Figure A.1 – Arrangement of equipment for loss measurement at a specified wavelength

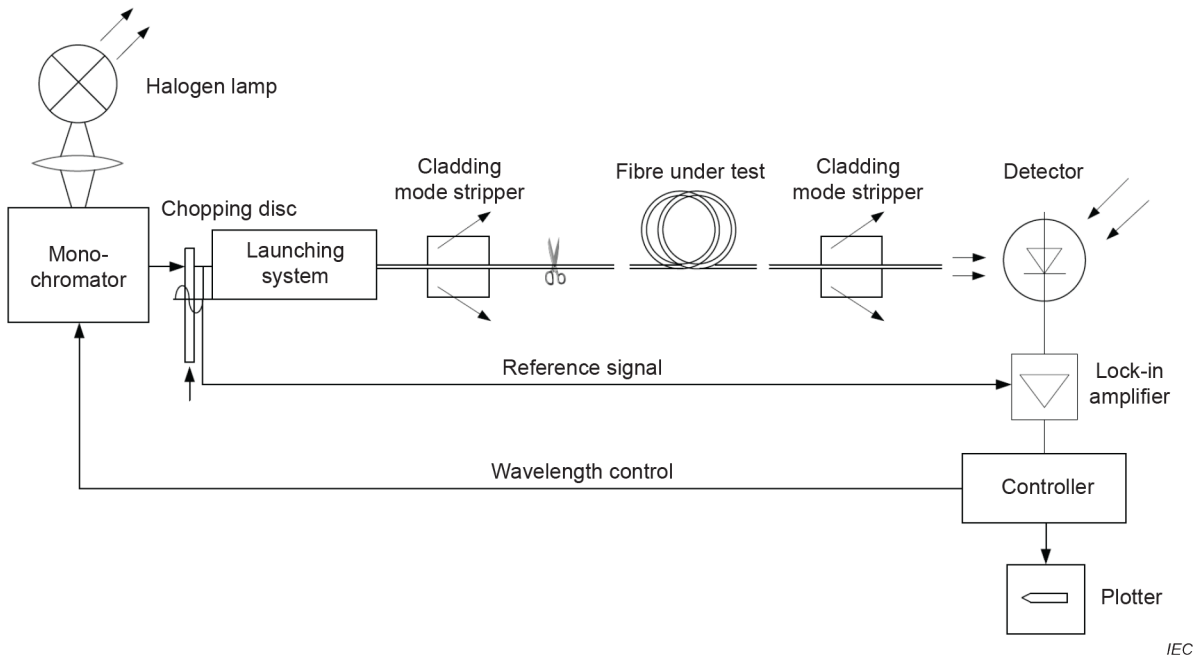


Figure A.2 – Arrangement of equipment used to obtain loss spectrum

A.2.1.2 General launch arrangement

Figure A.3 shows the general launch arrangement used for all fibres. See A.2.2 to A.2.4 for further details as they apply to specific categories of single-mode and multimode fibres.

A.2.1.3 Optical source

Use a suitable radiation source, such as a lamp, laser or light-emitting diode. The choice of source depends upon the type of measurement. The source shall be stable in position, intensity and wavelength over a time period sufficiently long to complete the measurement procedure. Specify the spectral line width (between the 50 % optical intensity power points of the sources used) such that the line width is narrow, for example less than 10 nm, compared with any features of the fibre spectral attenuation. Align the fibre to the launch cone, or connect it to a launch fibre.

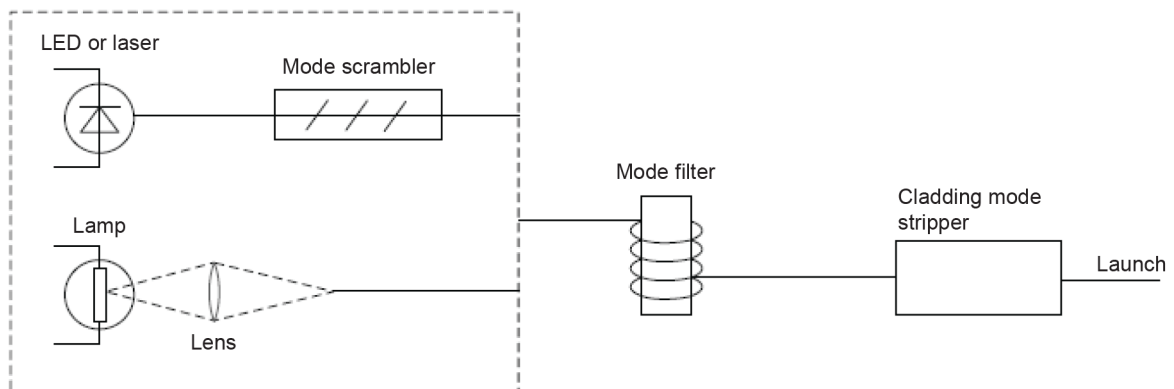


Figure A.3 – General launch arrangement

A.2.1.4 Source wavelength

Measurements can be made at one or more wavelengths. Alternatively, a spectral response can be obtained over a range of wavelengths.

A.2.1.5 Optical detection assembly

Means shall be provided to couple all power emitted from the specimen to the active region of the detector. For example, an optical lens system, a butt spliced to a fibre pigtail, or a coupling directly to the detector may be used. If the detector is already pigtailed, the pigtail fibre shall have sufficiently large core diameter and numerical aperture to capture all of the light exiting the reference and specimen fibres.

Use an optical detector that is linear and stable over the range of intensities and measurement times that are encountered in performing this measurement. A typical system might include a photovoltaic mode photodiode amplified by a current input amplifier, with synchronous detection by a lock-in amplifier.

A.2.1.6 Signal processing

It is customary to modulate the light source in order to improve the signal/noise ratio at the receiver. If such a procedure is adopted, link the detector to a signal processing system synchronous with the source modulation frequency. The detecting system should be substantially linear or have been fully characterized with a response function.

A.2.1.7 Cladding mode stripper

Use suitable techniques to remove optical power propagating in the cladding where this would significantly influence the received signal.

A.2.2 Launch apparatus for all single-mode fibres

A.2.2.1 General

An optical lens system or fibre pigtail may be employed to excite the test fibre. The power coupled into the fibre shall be stable for the duration of the measurement. See Figure A.1.

A.2.2.2 Fibre pigtail

If using a pigtail, it may be necessary to use index-matching material between the source pigtail and test fibre to eliminate interference effects.

A.2.2.3 Optical lens system

If using an optical lens system, provide a means of stably supporting the input end of the fibre, such as a vacuum chuck. Mount this support on a positioning device so that the fibre end can be repeatedly positioned in the input beam. A method of making the positioning of the fibre less sensitive is to overfill the fibre end spatially and angularly.

A.2.2.4 High-order mode filter

Use a method to remove high-order propagating modes in the wavelength range of interest. An example of such a high-order mode filter is a single loop of radius sufficiently small to shift the cut-off wavelength below the minimum wavelength of interest. For bending loss insensitive single-mode fibres, multiple loops with smaller radius or longer cut-back specimen length can be applied. Care should be taken that the radius is not too small as to induce wavelength-dependent oscillations. Increase of the cut-back specimen length should be accounted for in the attenuation computation.

A.2.2.5 Cladding mode stripper

The cladding mode stripper ensures that no radiation modes, propagating in the cladding region, will be detectable after a short distance along the fibre. The cladding mode stripper often consists of a material having a refractive index equal to or greater than that of the fibre