

INTERNATIONAL STANDARD

NORME INTERNATIONALE



Fibre optic sensors –
Part 1-1: Strain measurement – Strain sensors based on fibre Bragg gratings

Capteurs fibroniques –
Partie 1-1: Mesure de déformation – Capteurs de déformation basés
sur des réseaux de Bragg à fibres

STANDARD PREVIEW
(standards.iteh.ai)

IEC 61757-1-1:2020
<https://standards.iteh.ai/catalog/standards/sist/1188c090-72c0-4d06-82bd-11d1/iec-61757-1-1-2020>





THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2020 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22,000 terminological entries in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

67,000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC -

webstore.iec.ch/advsearchform

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études,...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

Electropedia - www.electropedia.org

Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 000 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 16 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

Glossaire IEC - std.iec.ch/glossary

67 000 entrées terminologiques électrotechniques, en anglais et en français, extraites des articles Termes et Définitions des publications IEC parues depuis 2002. Plus certaines entrées antérieures extraites des publications des CE 37, 77, 86 et CISPR de l'IEC.

INTERNATIONAL STANDARD

NORME INTERNATIONALE



Fibre optic sensors –
Part 1-1: Strain measurement – Strain sensors based on fibre Bragg gratings

Capteurs fibroniques –
**Partie 1-1: Mesure de déformation – Capteurs de déformation basés
sur des réseaux de Bragg à fibres**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 33.180.99

ISBN 978-2-8322-8019-5

Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.

CONTENTS

FOREWORD	5
INTRODUCTION	7
1 Scope	8
2 Normative references	8
3 Terms and definitions	9
4 Symbols	14
5 Structures and characteristics	16
5.1 Fibre Bragg grating (FBG)	16
5.2 FBG strain sensor configuration	19
5.3 Measuring point and installation	19
5.4 Gauge length	20
5.5 Strain and reference strain	20
5.6 Reference wavelength	20
5.7 Stability behaviour	21
5.7.1 Drift and creep	21
5.7.2 Shape stability of the Bragg grating peak	21
5.7.3 Hysteresis	21
5.8 Test specimen	22
5.9 Indication of the measured values	22
5.10 Zero point related measurement	22
5.11 Non-zero point related measurement	22
5.12 Production set	22
5.13 FBG strain sensor standard type	22
5.14 FBG strain sensor series	22
6 Features and characteristics to be reported	23
6.1 Construction details and geometrical dimensions	23
6.2 Configuration of the FBG strain sensor	23
6.3 Temperature and humidity range	23
6.4 Connecting requirement	23
7 Features and characteristics to be measured	23
7.1 Sampling and statistical evaluation	23
7.1.1 Sampling	23
7.1.2 Random sampling	23
7.1.3 Type testing	24
7.1.4 Series testing	24
7.1.5 Individual sample testing	24
7.1.6 Reporting the measuring result	24
7.1.7 Sample conditioning	24
7.1.8 Ambient test conditions	24
7.1.9 Required type of test for individual characteristics	24
7.2 Bragg wavelength λ_B	25
7.2.1 General	25
7.2.2 Measuring procedure	26
7.2.3 Evaluation	26
7.2.4 Reporting	26

ITeH STANDARD PREVIEW

(standards.iteh.ai)

IEC 61757-1-1:2020

[https://standards.iteh.ai/catalog/standards/sist/d88e690-72c6-4d06-82bd-](https://standards.iteh.ai/catalog/standards/sist/d88e690-72c6-4d06-82bd-26e3401e62d1/iec-61757-1-1-2020)

[26e3401e62d1/iec-61757-1-1-2020](https://standards.iteh.ai/catalog/standards/sist/d88e690-72c6-4d06-82bd-26e3401e62d1/iec-61757-1-1-2020)

7.3	FBG spectral width.....	26
7.3.1	Measuring procedure	26
7.3.2	Evaluation	27
7.3.3	Reporting.....	27
7.4	FBG reflectivity	27
7.4.1	Measuring procedure	27
7.4.2	Evaluation	27
7.4.3	Reporting.....	27
7.5	FBG strain sensitivity	28
7.5.1	General	28
7.5.2	Tensile test set-up	28
7.5.3	Measuring procedure tensile test	29
7.5.4	Evaluation	29
7.5.5	Reporting.....	30
7.6	Gauge factor k	30
7.6.1	General	30
7.6.2	Bending test set-up.....	30
7.6.3	Measurement procedure	32
7.6.4	Evaluation	33
7.6.5	Reporting.....	34
7.7	Maximum strain range at room temperature	34
7.7.1	General	34
7.7.2	Test set-up	34
7.7.3	Measuring procedure	34
7.7.4	Evaluation	34
7.7.5	Reporting.....	35
7.8	Fatigue behaviour	35
7.8.1	Test set-up	35
7.8.2	Measuring procedure	35
7.8.3	Evaluation	36
7.8.4	Reporting.....	36
7.9	Minimum operating radius of curvature	36
7.9.1	Measuring procedure	36
7.9.2	Evaluation	36
7.9.3	Reporting.....	36
7.10	Temperature and humidity ranges	37
7.10.1	General	37
7.10.2	Measuring procedure	37
7.10.3	Evaluation	37
7.10.4	Reporting.....	38
7.11	Other environmental influences.....	38
7.12	Temperature-induced strain response	38
7.12.1	General	38
7.12.2	Test set-up	39
7.12.3	Measuring procedure	39
7.12.4	Evaluation	39
7.12.5	Reporting.....	39
7.13	Proof test and lifetime considerations	40
7.13.1	General	40

7.13.2	Measuring procedure	40
7.13.3	Evaluation	41
7.13.4	Reporting.....	41
8	Recommendations for use of FBG measuring instruments	41
Annex A (normative)	Further properties of FBG strain sensors.....	43
A.1	General.....	43
A.2	Extended explanation of FBG side-lobes for different conditions of use.....	43
Annex B (informative)	Blank detail specification	48
B.1	General.....	48
B.2	Mechanical setup of the FBG strain sensor	48
B.3	Operational characteristics of the FBG strain sensor.....	48
B.4	Limiting parameters of the FBG strain sensor.....	49
B.5	Temperature data of the FBG strain sensor.....	49
B.6	Further information of the FBG strain sensor given upon request	49
B.7	Key performance data of the FBG measuring instrument.....	49
Annex C (informative)	Polarization effects	51
Annex D (informative)	Applied FBG strain sensors.....	52
D.1	General.....	52
D.2	Recommended bonding process	52
Bibliography.....		53
Figure 1	– Characteristics of the Bragg grating reflectance spectrum.....	11
Figure 2	– Operation principle of a fibre Bragg grating in an optical waveguide.....	17
Figure 3	– Example of a reflection spectrum of a fibre Bragg grating array.....	18
Figure 4	– Gauge length between two attachment points	19
Figure 5	– Reflection spectrum of a FBG (calculated (left) and measured spectrum (right))	25
Figure 6	– Determination of R_{FBG} from the FBG reflection spectrum (left, Equation (9)) and transmission spectrum (right, Equation (10))	27
Figure 7	– Example set-up of a tensile test facility	29
Figure 8	– Test layout for the 4-point bending test with scheme of lateral force and bending moment curves	31
Figure 9	– Determination of the strain via displacement measurement	31
Figure 10	– Whole-surface applied sensor on a bended flexural beam.....	32
Figure 11	– Test specimen with applied FBG strain sensor	36
Figure A.1	– Side-lobes in the case of a single FBG strain sensor	44
Figure A.2	– Fundamental peaks and detected side-lobe peaks in the case of serially multiplexed FBGs	45
Figure A.3	– Spectral peaks in the case of serially multiplexed FBGs.....	45
Figure A.4	– Parameters to identify fundamental peaks and side-lobes	46
Figure A.5	– Identification of fundamental peaks and side-lobes	47
Table 1	– Required type of test for individual characteristics.....	25

iTech STANDARD PREVIEW
(standards.iteh.ai)

IEC 61757-1-1:2020

https://standards.iteh.ai/catalog/standards/iec/61757-1-1-2020

26e3401e62d1/iec-61757-1-1-2020

INTERNATIONAL ELECTROTECHNICAL COMMISSION

FIBRE OPTIC SENSORS –**Part 1-1: Strain measurement –
Strain sensors based on fibre Bragg gratings**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61757-1-1 has been prepared by subcommittee SC 86C: Fibre optic systems and active devices, of IEC technical committee 86: Fibre optics.

This second edition cancels and replaces the first edition published in 2016. This edition constitutes a technical revision.

This edition includes the following technical changes with respect to the previous edition:

- a) update of cited standards;
- b) clarification of definitions and test specifications.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
86C/1642/FDIS	86C/1650/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 61757 series, published under the general title *Fibre optic sensors*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

iTeh STANDARD PREVIEW

(standards.iteh.ai)

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

<https://standards.iteh.ai/catalog/standards/sist/d88e690-72c6-4d06-82bd-26e3401e62d1/iec-61757-1-1-2020>

INTRODUCTION

The IEC 61757 series is published with the following logic: the sub-parts are numbered as IEC 61757-*M-T*, where *M* denotes the measure and *T*, the technology.

iTeh STANDARD PREVIEW **(standards.iteh.ai)**

[IEC 61757-1-1:2020](https://standards.iteh.ai/catalog/standards/sist/df88e690-72c6-4d06-82bd-26e3401e62d1/iec-61757-1-1-2020)

<https://standards.iteh.ai/catalog/standards/sist/df88e690-72c6-4d06-82bd-26e3401e62d1/iec-61757-1-1-2020>

FIBRE OPTIC SENSORS –

Part 1-1: Strain measurement – Strain sensors based on fibre Bragg gratings

1 Scope

This part of IEC 61757 defines detail specifications for fibre optic sensors using one or more fibre Bragg gratings (FBG) as the sensitive element for strain measurements. Generic specifications for fibre optic sensors are defined in IEC 61757.

This document specifies the most important features and characteristics of a fibre optic sensor for strain measurements, based on use of an FBG as the sensitive element, and defines the procedures for their determination. Furthermore, it specifies basic performance parameters and characteristics of the corresponding measuring instrument to read out the optical signal from the FBG. This document refers to the measurement of static and dynamic strain values in a range of frequencies.

A blank detail specification is provided in Annex B.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050 (all parts), *International Electrotechnical Vocabulary* (available at www.electropedia.org)

IEC 60068-2 (all parts), *Environmental testing – Part 2: Tests*

IEC 60793-2, *Optical fibres – Part 2: Product specifications – General*

IEC 60793-2-50, *Optical fibres – Part 2-50: Product specifications – Sectional specification for class B single-mode fibres*

IEC 61300-2 (all parts), *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 2: Tests*

IEC 61754 (all parts), *Fibre optic interconnecting devices and passive components – Fibre optic connector interfaces*

IEC 61757, *Fibre optic sensors – Generic specification*

IEC TR 61931, *Fibre optic – Terminology*

IEC 62129-1, *Calibration of wavelength/optical frequency measurement instruments – Part 1: Optical spectrum analyzers*

IEC 62129-2, *Calibration of wavelength/optical frequency measurement instruments – Part 2: Michelson interferometer single wavelength meters*

IEC 62129-3, *Calibration of wavelength/optical frequency measurement instruments – Part 3: Optical frequency meters internally referenced to a frequency comb*

ISO/IEC Guide 99, *International vocabulary of metrology – Basic and general concepts and associated terms (VIM)*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 61757, IEC 60050 (all parts), IEC TR 61931, ISO/IEC Guide 99 (VIM), and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

NOTE Long period gratings, non-uniform gratings, angled gratings, and FBG in polarization maintaining fibre are not considered.

3.1

fibre Bragg grating

FBG

phase diffraction grating integrated in optical single-mode silica-based fibres, according to category B of IEC 60793-2-50, to selectively reflect a very narrow range of wavelengths while transmitting others

Note 1 to entry: To achieve this characteristic, periodically spaced zones in the fibre core are altered to have different refractive indexes slightly higher than the core.

Note 2 to entry: This note applies to the French language only.

3.2

FBG strain sensor

device that uses one or more fibre Bragg gratings (3.1) as a sensitive element for strain measurements

Note 1 to entry: Different configurations are possible (see 5.2).

3.3

Bragg wavelength

λ_{Bref}

wavelength of the FBG (3.1), generally corresponding to the Bragg reflection peak or transmission minimum, without applied strain under reference ambient conditions

Note 1 to entry: If referred to as an FBG strain sensor (see 3.2), it refers to the configuration prior to its installation.

Note 2 to entry: λ_{B} is the wavelength of the FBG strain sensor indicated by the manufacturer without any further mechanical and ambient specification.

3.4

reference wavelength

λ_0

wavelength response of an FBG after installation or at the beginning of measurement to the affecting loading and ambient conditions

3.5 FBG reflectivity

 R_{FBG}

ratio of the incident optical power P_0 to the reflected optical power $P_{\lambda\text{B}}$ at Bragg wavelength λ_{B} in a defined spectral window

Note 1 to entry: The power transmitted to the FBG strain sensor is less than the incident (input) optical power due to losses in the fibre at the connector and even in the grating. The definition of the FBG reflectivity should therefore use the incident optical power P_0 (see the equations in 7.4.2) that represents the measurable part at the connector of a fibre optic sensor.

Note 2 to entry: P_0 depends on the measurement device and has no absolute characteristic value. From the user's point of view, the reflectivity is important if operational or installation conditions exist that influence the reflective characteristic.

3.6 transmission loss of an FBG sensor

loss of power of the transmitted optical signal passing along the optical fibre, the fibre Bragg grating and the components to connect an FBG strain sensor outside the FBG spectrum


Note 1 to entry: When considering transmission loss in an FBG sensor configuration, all parts that contribute to the reduction of power, for example transmission losses due to joining and connecting techniques, have to be considered. The transmission spectra of the grating can show a reduction of the grating transmissivity due to influences on grating performance. Such propagation losses in the grating should be considered separately. The entry only applies to wavelength multiplexed FBG strain sensors double-ended for in-series connection.

3.7 FBG spectral width

full width at half maximum (FWHM) of the reflection peak or transmission minimum at Bragg wavelength

Note 1 to entry: The FWHM of an FBG spectrum is the wavelength range of the spectrum over which the amplitude is greater than 50 % (3 dB) of its reflectance maximum value at λ_{B} (see Figure 1).

Note 2 to entry: This note applies to the French language only.

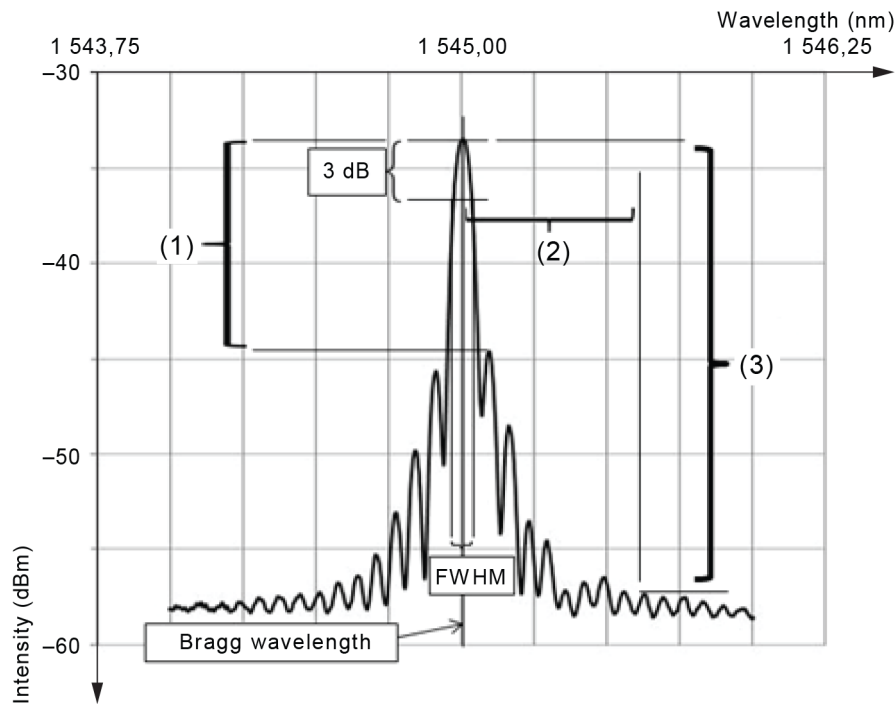

IEC

Key

- (1) difference in intensity between Bragg peak and largest side-lobe (called "relative side-lobe level")
- (2) recorded spectral distance (see 3.12) from the maximum value of one or both sides of the Bragg wavelength
- (3) FBG signal-to-noise ratio SNR_{FBG} for (2)

Figure 1 — Characteristics of the Bragg grating reflectance spectrum

3.8**side-lobes**

reflection peaks on each side of the Bragg wavelength peak λ_B

Note 1 to entry: Side-lobes are also called "side modes".

Note 2 to entry: Side-lobes shall be considered according to conditions of use (see Figure 1 and Clause A.2).

Note 3 to entry: To describe the transmission characteristics, the following features should be reported:

- maximum attenuation of the transmission spectrum due to parasitic optic effects (in dB);
- maximum attenuation of the transmission spectrum within the wavelength range $\lambda_B \pm 1$ nm.

Note 4 to entry: The quality of the wanted signal is expressed by the signal-to-noise ratio (SNR). The wavelength range reported can deviate from those usually related to the SNR. In this case, it shall be explicitly reported.

3.9**relative side-lobe level**

ratio of the maximum value of the amplitude of the specified field component in a side-lobe to the maximum value in a reference lobe

Note 1 to entry: The reference lobe of an FBG is the peak power at the Bragg wavelength λ_B ; peak power of the largest side-lobe in the FBG spectrum is the related field component (see Figure 1).

Note 2 to entry: Relative side-lobe level is usually expressed in decibels.

Note 3 to entry: Some manufacturers indicate this term as side-lobe suppression ratio (SLSR).

3.10 width level

relative amplitude difference between a local maximum and a specified amplitude, at which a spectral feature is evaluated for a two-sided threshold crossing for purposes of defining that local maximum as either a fundamental peak or as a side-lobe

Note 1 to entry: The width level is applied as an evaluative relative threshold to a local maximum.

Note 2 to entry: Width level is expressed in decibels.

3.11 peak width

width over which a local maximum exhibits a two-sided spectrum crossing over a threshold defined by the width level parameter

Note 1 to entry: The quantity FBG spectral width is defined as the spectral width of the FBG fundamental mode and will be equal to or greater than the peak detection algorithm's peak width requirement when the width level is defined as 3 dB.

Note 2 to entry: The peak width requirement is applied in conjunction with the width level parameter to distinguish fundamental peaks from side-lobes in an array spectrum where side-modes may be at an absolute amplitude higher than adjacent fundamental peaks.

Note 3 to entry: When several sensors are used in a Bragg grating array, special attention shall be paid to the transmission characteristic. If wavelength multiplexing is used, unintentional signal-crosstalk of the Bragg grating pulses is possible. The Bragg grating wavelengths shall be designed with a sufficient distance of the Bragg peaks in the available spectrum to avoid overlapping of the Bragg wavelength. Parasitic reflexions, if relevant, shall be suppressed.

Note 4 to entry: Peak width is expressed in nanometres.

3.12 FBG signal-to-noise ratio

SNR_{FBG}

ratio of the maximum amplitude of the Bragg wavelength peak to that of the coexistent side-lobe amplitude at a wavelength distance of 1 nm under unloaded conditions

Note 1 to entry: SNR_{FBG} shall not be confused with the side-lobes of an FBG caused by the inscription process and depending on the grating number, grating distance Λ and the change in the refractive index of the FBG. Noise is generated by the measurement device; side-lobes are generated during inscription of the grating and have great importance for the use of an FBG as strain sensor (see Figure 1 and 3.7).

Note 2 to entry: The value "1 nm" is still valid even if the central wavelength of an FBG is extended to the visible range.

Note 3 to entry: FBG signal-to-noise ratio is expressed in decibels.

Note 4 to entry: This note applies to the French language only.

3.13 FBG strain sensitivity

ratio of the relative change in wavelength $\Delta\lambda/\lambda_0$ for a given strain change $\Delta\varepsilon$ defined by the equation

$$\frac{\Delta\lambda}{\lambda_0} = (1-p)\Delta\varepsilon$$

Note 1 to entry: FBG strain sensitivity describes the response of an FBG to uniaxial strain deformation $\Delta\varepsilon$ of the grating area. The strain response is represented by the photo-elastic coefficient p . For practical use, the gauge factor k is introduced as a linear approximate for $(1-p)$. In this case, the sensitivity can be considered as a linear function for a uniformly non-integrated stretched grating area (see 7.6), i.e. only the optical fibre and coating are deformed.

Note 2 to entry: Frequently, this term is defined, for practical reasons, as the peak shift ($\Delta\lambda$ in nm) over the introduced strain change ($\Delta\varepsilon$ in $\mu\text{m}/\text{m}$) related to a specified reference wavelength λ_0 .

Note 3 to entry: Strain sensitivity can be superimposed by temperature-induced deformation of the optical fibre.

Note 4 to entry: If the strain sensitivity gets a non-linear characteristic because of the set-up of for example a strain transducer, higher order terms may be used. The calibration function and the parameters have to be defined.

3.14 gauge factor

k

ratio of the relative change in wavelength $\Delta\lambda/\lambda_0$ to a mechanical strain $\Delta\varepsilon$ introduced to an FBG strain sensor and expressed by the dimensionless gauge factor k measured by the manufacturer

$$k = \frac{\Delta\lambda}{\lambda_0 \Delta\varepsilon}$$

Note 1 to entry: The gauge factor k is used by manufacturers to express the strain response of their products.

Note 2 to entry: The gauge factor k considers all influences of the FBG strain sensor on the strain sensitivity. It can vary with the selected structural form of the strain sensor (e.g. Bragg grating fibre with special protecting layer or FBG strain gauge) and therefore has to be distinguished from the strain sensitivity of the Bragg grating in the optical fibre (see 3.13).

Note 3 to entry: The gauge factor k for an FBG strain sensor assumes a linear characteristic. Considering the whole measurement system (sensor, device, cabling), it can be separately defined for the components of the measurement system. It is only valid for defined conditions. In the case of a non-linear characteristic (e.g. by creeping effect in the strain transfer), the gauge factor k is considered as linear within a defined permissible error.

3.15 gauge length

length within which a strain will cause a change in the measured value of the FBG strain sensor

Note 1 to entry: The gauge length depends on the FBG strain sensor configuration (see 5.2).
<https://standards.iteh.ai/catalog/standards/sist/d88e690-72c6-4d06-82bd-26e3401e62d1/iec-61757-1-1-2020>

3.16 minimum operating radius of curvature

minimum radius that an FBG may be bent without change of the specified performance parameters

3.17 strain range

<FBG sensor> maximum strain range that the FBG can measure when excited according to the stated mechanical conditions without change of the specified performance parameters

Note 1 to entry: This could include axial tensile strain and compression.

Note 2 to entry: Outside the strain range, the FBG strain sensor may not be physically damaged, but the specified measurement performance may be affected.

3.18 FBG period

Λ

distance between the periodically varying refractive index zones (grating planes) in the fibre and expressed by Λ

Note 1 to entry: The FBG period defines the Bragg wavelength (see 3.3) by the equation

$$\Lambda = \frac{k_B \times \lambda_B}{2 \times n_{\text{eff}}}$$

where

$k_B = 1, 2, 3$