

INTERNATIONAL STANDARD

NORME INTERNATIONALE

Passive RF and microwave devices, intermodulation level measurement –
Part 5: Measurement of passive intermodulation in filters

Dispositifs RF et à micro-ondes passifs, mesure du niveau d'intermodulation –
Partie 5: Mesure de l'intermodulation passive dans les filtres

<https://standards.iteh.ai/catalog/standards/sist/b69ca00-1c10-4420-82a5-85e2a1e978c5/iec-62037-5-2021>



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2021 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

IEC online collection - oc.iec.ch

Discover our powerful search engine and read freely all the publications previews. With a subscription you will always have access to up to date content tailored to your needs.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 18 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC -

webstore.iec.ch/advsearchform

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études, ...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

IEC online collection - oc.iec.ch

Découvrez notre puissant moteur de recherche et consultez gratuitement tous les aperçus des publications. Avec un abonnement, vous aurez toujours accès à un contenu à jour adapté à vos besoins.

Electropedia - www.electropedia.org

Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 000 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 16 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

INTERNATIONAL STANDARD

NORME INTERNATIONALE

Passive RF and microwave devices, intermodulation level measurement –
Part 5: Measurement of passive intermodulation in filters

Dispositifs RF et à micro-ondes passifs, mesure du niveau d'intermodulation –
Partie 5: Mesure de l'intermodulation passive dans les filtres

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 33.040.20

ISBN 978-2-8322-1049-2

Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.

CONTENTS

FOREWORD	3
1 Scope	5
2 Normative references	5
3 Terms, definitions and abbreviated terms	5
3.1 Terms and definitions	5
3.2 Abbreviated terms	5
4 General comments on PIM testing of filter assemblies	6
4.1 Sources of error: back-to-back filters	6
4.2 Environmental and dynamic PIM testing	6
4.3 General test procedure	7
5 Example of test equipment schematics for filter testing	8
5.1 General	8
5.2 Transmit band testing	8
5.3 Receive band testing – Dual high-power carriers	9
5.4 Receive band testing – Injected interferer	11
Figure 1 – Typical receive band PIM test set-up	6
Figure 2 – Example of a striking element for ≤ 1 J	7
Figure 3 – Typical test equipment schematic for measuring transmit-band, forward, passive IM products on an N-port DUT using two high-power carriers	9
Figure 4 – Typical test equipment schematic for measuring receive-band, forward, passive IM products on an N-port DUT using two high-power carriers	10
Figure 5 – Typical test equipment schematic for measuring receive-band, reverse, passive IM products on an N-port DUT, using two high-power carriers	10
Figure 6 – Typical test equipment schematic for measuring receive-band, passive IM products on an N-port DUT, using two high-power carriers	11
Figure 7 – Typical test equipment schematic for measuring receive-band, forward, passive IM products on an N-port DUT, using the injected interferer technique	12
Figure 8 – Typical test equipment schematic for measuring receive-band, reverse, passive IM products on an N-port DUT, using the injected interferer technique	12
Figure 9 – Typical test equipment schematic for measuring receive-band, passive IM products on an N-port DUT, using the injected interferer technique	13
Table 1 – Summary table referencing examples of test equipment schematics for measuring PIM on filter-type devices	8

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**PASSIVE RF AND MICROWAVE DEVICES,
INTERMODULATION LEVEL MEASUREMENT –****Part 5: Measurement of passive intermodulation in filters****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 62037-5 has been prepared by IEC technical committee 46: Cables, wires, waveguides, RF connectors, RF and microwave passive components and accessories. It is an International Standard.

This second edition cancels and replaces the first edition published in 2013. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) dynamic testing requirements updated to define impact energy and locations to apply impacts to devices under test.

The text of this International Standard is based on the following documents:

Draft	Report on voting
46/837/FDIS	46/858/RVD

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members_experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/standardsdev/publications.

A list of all the parts in the IEC 62037 series, published under the general title *Passive RF and microwave devices, intermodulation level measurement* can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/fb63ca66-1c10-442b-82a5-85e2a1e978c5/iec-62037-5-2021>

PASSIVE RF AND MICROWAVE DEVICES, INTERMODULATION LEVEL MEASUREMENT –

Part 5: Measurement of passive intermodulation in filters

1 Scope

This part of IEC 62037 defines test fixtures and procedures recommended for measuring levels of passive intermodulation generated by filters, typically used in wireless communication systems. The purpose is to define qualification and acceptance test methods for filters for use in low intermodulation (low IM) applications.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60068-2-75:2014, *Environmental testing – Part 2-75: Tests – Test Eh: Hammer tests*

IEC 62037-1, *Passive RF and microwave devices, intermodulation level measurement – Part 1: General requirements and measuring methods*

[IEC 62037-5:2021](https://standards.iteh.ai/catalog/standards/sist/fb63ca66-1c10-442b-82a5-85c2a1c978c5/iec-62037-5-2021)

3 Terms, definitions and abbreviated terms

3.1 Terms and definitions

No terms and definitions are listed in this document.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>


3.2 Abbreviated terms

DUT	Device under test
IM	Intermodulation
PIM	Passive intermodulation
VSWR	Voltage standing wave ratio

4 General comments on PIM testing of filter assemblies

4.1 Sources of error: back-to-back filters

Testing filter assemblies for PIM can be error prone if certain precautionary guidelines are not followed. Since PIM can be a frequency-dependent phenomenon, mathematically related to the harmonics of the input signals and combinations thereof, consideration should be given not only to the behaviour of the test set-up under fundamental stimulation, but also its harmonic performance. In particular, consider a receive-band PIM test set-up as shown in Figure 1. As shown, this set-up could be used to measure the PIM in a two-port device under test (DUT); however, the accuracy of the measurement could be in question due to the back-to-back filters (diplexers) used.

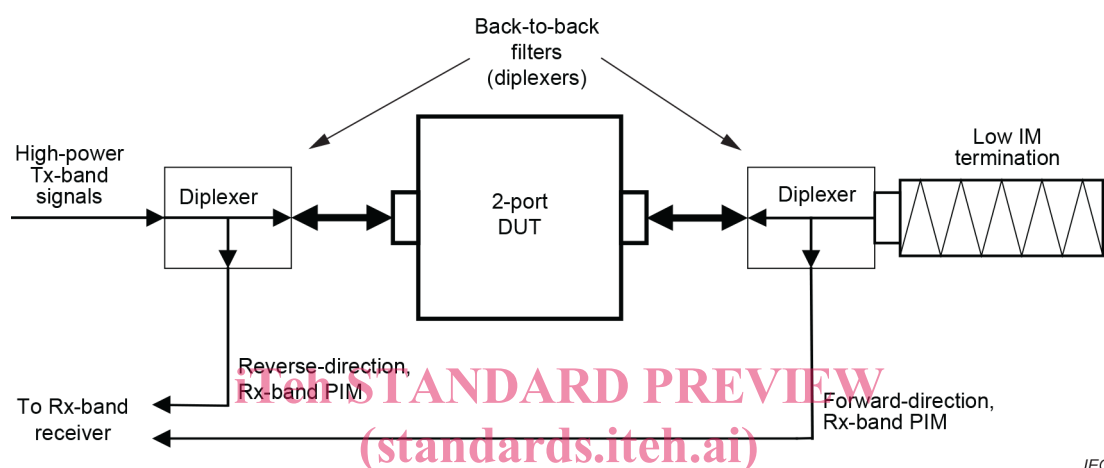

IEC

Figure 1 – Typical receive band PIM test set-up
<https://standards.iteh.ai/catalog/standards/sist/b63ca66-1c10-442b-82a5-85e2a1e978c5/iec-62037-5-2021>

While the diplexers certainly appear as a matched load around the fundamental frequencies and receive-band IM products, they can be very poorly matched at the harmonics of the fundamentals. A poor match will set up a standing wave at the harmonic frequencies which can re-illuminate any PIM sources within the DUT with higher-than-typical current densities. Furthermore, the measured IM response will become highly dependent upon the electrical length of the DUT because the locations of the peaks and valleys of any standing waves will move with respect to the PIM sources as the electrical length of the DUT changes.

4.2 Environmental and dynamic PIM testing

Environmental and dynamic PIM testing, which can include placing vibrational or thermal stresses upon filter assemblies while concurrently measuring the PIM produced, may not give accurate or repeatable results. There are several significant factors affecting the results of these types of PIM tests.

- DUT/test system isolation – it is highly desirable that any environmental and dynamic stresses placed upon a DUT be isolated from the test system such that there are no measurable residual effects. This not only addresses the practical issues of test system reliability and maintenance, but it directly affects the issue of measurement repeatability. That is, should a particular piece of the test system require replacement after a set number of trials, then the results of subsequent measurements may be skewed by the performance of the replaced part.
- Measurement repeatability – it should be possible to repeat the results obtained from a particular measurement within a specific precision. However, the inherent sensitivity of the PIM response can prevent a desired precision from being achieved.

- c) Stress repeatability – the particular stress placed upon the DUT shall be repeatable both between tests upon the same DUT and tests between different DUTs. However, in the experience of many, it is likely that the repeatability of the particular stress will be far worse than that of the particular PIM test results so that the standard specifying the stress may not be unnecessarily rigorous.

Based upon these factors, measuring PIM from a filter assembly whilst it undergoes thermal or vibrational stresses is not currently recommended.

A less vigorous form of dynamic testing should be performed on a filter assembly in order to demonstrate that stability of the PIM level is maintained after certain stresses have been applied. This style of dynamic test typically takes the form of striking the assembly with an instrument that will not damage the surface of the assembly. The impact of this tapping shall be at least that described in IEC 60068-2-75:2014, Clause 7 for the 0,14 J drop, with conditions given in IEC 60068-2-75:2014, Table 1 and Table 2, that is, a 0,25 kg striking element of polyamide (Rockwell hardness: $85 < \text{HRR} < 100$) dropped from a height of 56 mm.

The impact shall be applied as close as possible to each of the connectors of the filter, while still impacting the filter body. The impact near each connector shall be repeated three times. Also, for any side of the filter that has no connectors, three impacts shall be applied along one edge of that side. The shape of the striking element shall be the same as described in IEC 60068-2-75, for ≤ 1 J. An example, taken from IEC 60068-2-75:2014, Annex A, is shown Figure 2.



SOURCE: IEC 60068-2-75:2014, Figure A.1.

Figure 2 – Example of a striking element for ≤ 1 J

The results of the PIM tests shall be documented in a report. That report shall state

- 1) the test severity level, i.e. the weight and drop height for the impact test,
- 2) the frequency range(s) of the PIM test(s), the greatest PIM value after the application of the impacts.

If something other than the vertical hammer test method is applied, then there shall be documentation showing that the alternative test method produces an impact at least as great as the vertical hammer test.

4.3 General test procedure

An appropriate test set-up shall be selected from the example schematics described in Clause 4, according to the specific test requirements called for. The procedure is as follows:

- a) calibrate the test set-up for correct carrier signal level and IM receiver level as described in IEC 62037-1;
- b) connect the filter DUT in the test set-up;
- c) measure the IM performance of the DUT on the receiver.

The results obtained shall be expressed in one of the forms indicated in IEC 62037-1.

5 Example of test equipment schematics for filter testing

5.1 General

Several examples of schematics are presented. Each figure corresponds to a particular test scenario as indicated in the matrix in Table 1. It will be noted that some of the example schematics are modifications of the test configurations shown in IEC 62037-1. These modifications allow the operator to satisfactorily perform a range of tests which are more specific to the requirement of filter assemblies.

It is imperative that the residual PIM level of the test system be verified prior to measurement of the filter assembly. It is strongly recommended that this level be at least 10 dB below the PIM level requirement of the filter assembly, in order to minimize errors due to the system itself. This measurement can be carried out in the following example set-ups by excluding the DUT from the measurement system and monitoring the resultant PIM level under the normal test conditions. The only systems which deviate slightly from this are Figure 6 and Figure 9 and notes are provided for these two set-ups, indicating the test point at which the system residual intermodulation distortion can be measured with the DUT removed.


Table 1 – Summary table referencing examples of test equipment schematics for measuring PIM on filter-type devices

Measurement type	Tx band		Rx band	
	Two high-power carriers	Two high-power carriers	One high-power carrier + injected interferer	
N-port, forward IM	Figure 5	Figure 4	Figure 7	
N-port, reverse IM	Figure 5	Figure 5	Figure 8	
N-port, receive port IM		Figure 6	Figure 9	

Figure 6 and Figure 9 outline equipment set-ups which measure the PIM present at a receive port of the filter assembly. These set-ups are distinct from those measuring PIM in the reverse direction (Figure 5 and Figure 8) and can give quite different results. It is therefore important that consideration is given to using the appropriate measurement system, in order to measure the required PIM performance.

5.2 Transmit band testing

Passive IM testing within the transmit band is typically performed on isolators and other relatively high PIM components. For this test, two carriers are combined into a single transmission line and then passed through the DUT. Once these are through the DUT, it is advisable to sufficiently attenuate the two carriers to prevent the generation of active IM products and possible damage within the receiver. A low noise amplifier is typically not required due to the high PIM signal levels present from the DUT in these tests. This is described in Figure 3.

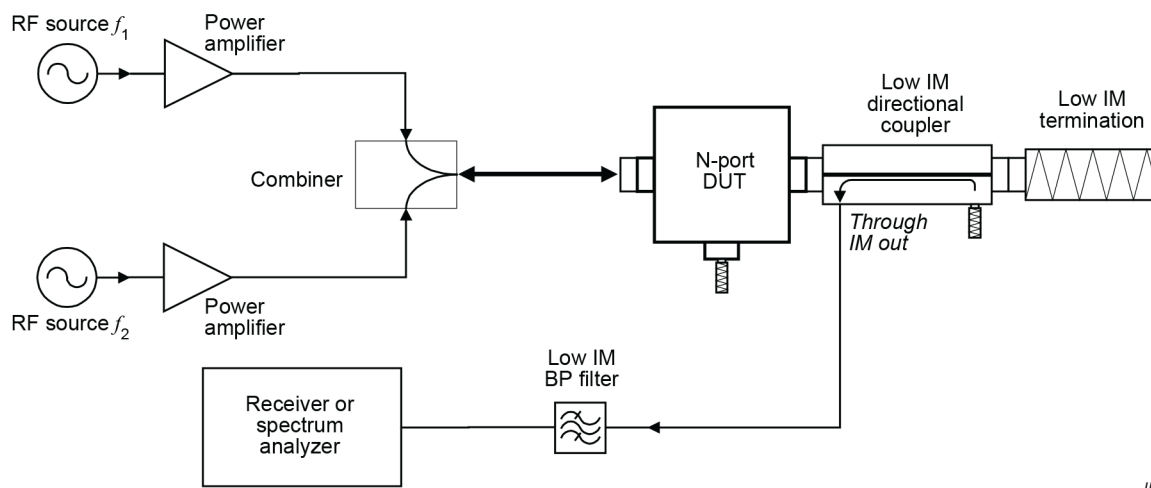

The combiner port-to-port isolation plus band stop/low pass filters should be optimized to set the test bench system residual to an acceptable level.

Consideration should be given to the possible generation of IM products within the receiver/spectrum analyzer and whether a sufficient dynamic range can be obtained. An optional IM band pass filter may be used to allow these conditions to be met.

Unused DUT ports shall be terminated in a matched load.

The low IM directional coupler could alternatively be replaced by an appropriate diplexer.

- a) In this instance, it is strongly recommended that the replacement diplexer has a good VSWR in both the Tx and Rx bands.
- b) Due to the potentially reflective nature of the replacement diplexer and DUT, it should also be recognized that there would be a mechanism that supports multipathing.

Figure 3 – Typical test equipment schematic for measuring transmit-band, forward, passive IM products on an N-port DUT using two high-power carriers

5.3 Receive band testing – Dual high-power carriers

When testing for PIM products in the receive band, a much greater measurement sensitivity is required than for transmit band testing. For this reason, a low-noise amplifier and bandpass filter are typically utilized before the measurement receiver (or spectrum analyzer).

Examples of schematics for both forward and reverse PIM testing on N-port devices are shown in Figure 4, Figure 5 and Figure 6.