

Edition 1.0 2018-06

INTERNATIONAL STANDARD

Ferrite cores – Guidelines on dimensions and the limits of surface irregularities –
Part 8: E-cores (standards.iteh.ai)

IEC 63093-8:2018 https://standards.iteh.ai/catalog/standards/sist/872902ef-f53c-4a22-bc8f-aac4d5f83682/iec-63093-8-2018





THIS PUBLICATION IS COPYRIGHT PROTECTED Copyright © 2018 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office 3, rue de Varembé CH-1211 Geneva 20 Switzerland

Tel.: +41 22 919 02 11

info@iec.ch www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

IEC Catalogue - webstore.iec.ch/catalogue

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and

IEC publications search - webstore. iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications. standard

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and 193 if you wish to give us your feedback on this publication or also once a month by emailttps://standards.itch.ai/catalog/standardeed.further(assistance/please contact the Customer Service

Electropedia - www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing 21 000 terms and definitions in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

67 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

IEC Customer Service Centre - webstore.iec.ch/csc

aac4d5f83682/iec-Centre: sales@iec.ch.



Edition 1.0 2018-06

INTERNATIONAL STANDARD

Ferrite cores – Guidelines on dimensions and the limits of surface irregularities –
Part 8: E-cores

(standards.iteh.ai)

<u>IEC 63093-8:2018</u> https://standards.iteh.ai/catalog/standards/sist/872902ef-f53c-4a22-bc8f-aac4d5f83682/iec-63093-8-2018

INTERNATIONAL ELECTROTECHNICAL COMMISSION

ICS 29.100.10 ISBN 978-2-8322-5835-4

Warning! Make sure that you obtained this publication from an authorized distributor.

CONTENTS

FOREWORD	4
1 Scope	6
2 Normative references	6
3 Terms and definitions	6
4 Primary dimensions	6
4.1 General	6
4.2 Dimensions of E-cores	
4.2.1 Main dimensions	7
4.2.2 Effective parameter and A _{min} values	9
4.3 Dimensional limits for coil formers	11
5 Limits of surface irregularities	15
5.1 General	15
5.2 Examples of surface irregularities	15
5.3 Chips and ragged edges	15
5.3.1 General	15
5.3.2 Chips and ragged edges on the mating surfaces	15
5.3.3 Chips and ragged edges on the other surfaces	
5.4 Cracks TECH STANDARD PREVIEW 5.5 Flash	18
5.6 Pull-outs(standards.iteh.ai)	18
5.7 Crystallites	
5.8 Pores <u>IEC 63093-8:2018</u>	19
Annex A (normative) Perived standards log/standards/sist/872902ef-f53c-4a22-bc8f-	21
Annex B (normative) Example of dimensions for gauges to check the dimensions of E-cores complying with this document	22
B.1 General	22
B.2 Procedure and requirements	24
Annex C (informative) Reference of allowable areas of chips	25
Bibliography	26
Figure 1 – Dimensions of E-cores with rectangular cross-section	7
Figure 2 – Main dimensions of coil formers	12
Figure 3 – Examples of surface irregularities	
Figure 4 – Chip location for E-cores	
Figure 5 – Crack and pull-out locations for E-cores	
Figure 6 – Crystallite location for E-cores	
Figure 7 – Pore location for E-cores.	
Figure B.1 – Gauge dimensions	22
Table 1 – Dimensions of E-cores with rectangular cross-section	
Table 2 – Effective parameter and A_{\min} values	10
Table 3 – Dimensional limits for coil formers	13
	4-
Table 4 – Area and length reference for visual inspection	17

I		\sim	630	OЗ	Q.20	12 6) IEC	2018
	_	ι.	ท.รบ	9.5-	ハンハ	וא ע	n i i i i i i i i i i i i i i i i i i i	70118

Table B.1 – Gauge dimensions	23
Table C.1 – Allowable areas of chips for E-cores	25

iTeh STANDARD PREVIEW (standards.iteh.ai)

IEC 63093-8:2018 https://standards.iteh.ai/catalog/standards/sist/872902ef-f53c-4a22-bc8f-aac4d5f83682/iec-63093-8-2018

INTERNATIONAL ELECTROTECHNICAL COMMISSION

FERRITE CORES – GUIDELINES ON DIMENSIONS AND THE LIMITS OF SURFACE IRREGULARITIES –

Part 8: E-cores

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.

 aac4d5f83682/iec-63093-8-2018
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 63093-8 has been prepared by IEC technical committee 51: Magnetic components, ferrite and magnetic powder materials.

This first edition cancels and replaces the first edition of IEC 62317-8 published in 2006 and the second edition of IEC 60424-3 published in 2015. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to IEC 62317-8:2006 and IEC 60424-3:2015:

- a) This document integrates IEC 62317-8:2006 and IEC 60424-3:2015;
- b) Table 4 Allowable areas of chips for E-cores, of IEC 60424-3:2015, has been moved to Annex C (informative) of this document.

The text of this International Standard is based on the following documents:

CDV	Report on voting
51/1213/CDV	51/1235/RVC

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 63093 series, published under the general title *Ferrite cores – Guidelines on dimensions and the limits of surface irregularities*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "http://webstore.iec.ch" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- · replaced by a revised edition, or
- amended.

iTeh STANDARD PREVIEW

A bilingual version of this publication may be issued at a later date. (Standards.iteh.ai)

IEC 63093-8:2018 https://standards.iteh.ai/catalog/standards/sist/872902ef-f53c-4a22-bc8f-aac4d5f83682/iec-63093-8-2018

FERRITE CORES – GUIDELINES ON DIMENSIONS AND THE LIMITS OF SURFACE IRREGULARITIES –

Part 8: E-cores

1 Scope

This part of IEC 63093 specifies the dimensions that are of importance for mechanical interchangeability for a preferred range of E-cores made of ferrite and the essential dimensions of coil formers to be used with them, as well the effective parameter values to be used in calculations involving them. It also gives guidelines on allowable limits of surface irregularities applicable to E-cores.

The specifications contained in this document are useful in negotiations between ferrite core manufacturers and customers about surface irregularities.

The use of derived standards, which give more detailed specifications of component parts while still permitting compliance with this standard, is discussed in Annex A.

2 Normative references STANDARD PREVIEW

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies and ards itch ai/catalog/standards/sist/872902ef f53c-4a22-bc8f-aac4d5f83682/iec-63093-8-2018

IEC 60205, Calculation of the effective parameters of magnetic piece parts

IEC 60401-1, Terms and nomenclature for cores made of magnetically soft ferrites – Part 1: Terms used for physical irregularities

IEC 60424-1, Ferrite cores – Guidelines on the limits of surface irregularities – Part 1: General specification

3 Terms and definitions

For the purpose of this document, the terms and definitions given in IEC 60401-1 and IEC 60424-1 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at http://www.electropedia.org/
- ISO Online browsing platform: available at http://www.iso.org/obp

4 Primary dimensions

4.1 General

Compliance with the following requirements ensures mechanical interchangeability of complete assemblies and coil formers.

4.2 Dimensions of E-cores

4.2.1 Main dimensions

The main dimensions of E-cores with rectangular cross-section shall be those given in Table 1.

The dimensions of the cores can be checked by means of gauges, an example of which is given in Annex B. In order to facilitate production it can be necessary to use gauges with dimensions differing from those given in Annex B, although no relaxation of the requirements for the dimensions of the cores given in Table 1 is thereby permitted. The dimensions specified in Table 1 are illustrated in Figure 1.

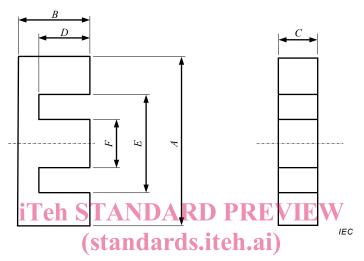


Figure 1 – Dimensions of E-cores with rectangular cross-section IEC 63093-8:2018

https://standards.iteh.ai/catalog/standards/sist/872902ef-f53c-4a22-bc8f-aac4d5f83682/iec-63093-8-2018

Table 1 - Dimensions of E-cores with rectangular cross-section

Part Mint Max Mint Single Mint Min			A		В		C	a	_		E		F		
Min. Max. Min. Min. Min. Min. Min. Min. <th< th=""><th>Size</th><th></th><th>ш</th><th></th><th>בר (בי</th><th>E.</th><th>ШL</th><th>Ē</th><th>П</th><th>E </th><th>Ē</th><th>E</th><th>E</th><th>IEC 61246^a references</th><th>Industrial references</th></th<>	Size		ш		בר (בי	E.	ШL	Ē	П	E 	Ē	E	E	IEC 61246 ^a references	Industrial references
6.15 6.35 2.57 2.73 1.90 2.00 1.85 2.05 3.60 3.80 4.00 1.30 1.40 E6.3/2 6.05 6.30 2.80 1.90 2.00 1.85 2.05 3.60 3.80 4.00 1.30 1.40 E6.3/2 7.65 8.15 3.56 4.05 2.30 2.00 2.80 2.90 2.90 1.30 1.40 E6.3/2 8.10 8.60 110 3.80 4.05 2.30 2.00 2.80 2.90 2.30 1.50 2.80 2.30 2.40 E8.2 8.10 8.60 110 3.80 4.05 2.30 2.00 2.80 2.00 2.80 2.30 1.00 2.80 2.00 8.60 9.40 3.86 4.05 2.30 2.00 2.00 2.00 2.80 2.00 2.00 2.00 8.60 9.40 9.20 2.88 5.05 2.00 2.80 3.50 3.40 3.70 4.80 3.50 2.40 2.80 3.00 E103 9.80 10.2 6.30 6.50 3.40 3.70 4.50 4.80 8.90 9.50 3.40 3.70 E103 9.80 10.5 6.35 6.50 3.40 3.70 4.50 4.80 4.90 4.20 3.40 3.70 E103 9.80 10.5 6.30 6.50 3.40 3.70 4.50 4.80 4.20 4.40 4.70 E103 9.80 10.5 6.30 6.50 3.40 3.70 4.50 6.70 4.40 4.70 E103 9.80 19.4 7.80 8.20 4.50 6.50 6.40 4.70 4.40 4.70 E103 9.80 19.4 7.80 8.20 4.50 6.50 6.40 4.70 4.40 4.70 E103 9.80 19.4 7.80 8.20 4.60 6.50 6.50 6.40 4.40 4.70 6.40 9.40 19.4 2.68 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.40 12.3 12.8 6.90 7.50 8.70 9.20 9.20 9.20 9.20 9.20 9.20 9.40 12.3 12.3 12.4 8.80 9.20 9.20 9.80 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20 9.20		Min.	Мах.	Min	Max.	MinA	Max.	Mib.	Max	Min.	Max.	Min.	Max.		
6 (6.05) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00) (8.00	E5,3/2	5,15	5,35	2,57	2, 23-9 m	1,39, r.	2.00 TP	i		3,80	4,00	1,30	1,40	E5,3/2	FEE5,25; EE5
8.10 8.10 8.10 4.06 2.306.300 2.400118 2.406.10 2.06 5.60 5.60 5.60 5.00 2.00 E.02 8.10 8.60 440 3.86 4.15 4.06 2.406 2.406 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00 2.00	E6,3/2	6,05	6,30	2,80	2,90	1,90	2,00			3,60	3,80	1,30	1,40	E6,3/2	FEE6,18
8:00 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 0.60 <th< td=""><td>E8/2</td><td>7,85</td><td>8,15</td><td>3,95</td><td>4,05</td><td>21306309</td><td>2,40018</td><td></td><td></td><td>5,60</td><td>5,80</td><td>2,30</td><td>2,40</td><td>E8/2</td><td>FEE8</td></th<>	E8/2	7,85	8,15	3,95	4,05	21306309	2,40018			5,60	5,80	2,30	2,40	E8/2	FEE8
8 (60) 9,40 3,86 4,18 1,78 1,02 2,03 2,40 5,07 5,33 1,78 2,02 2,88 3,00 E10,3 9,80 10,2 4,88 5,00 2,88 3,00 3,60 2,88 3,00 2,89 3,00 E10,3 10,0 10,5 5,35 5,65 4,50 4,90 4,35 7,60 8,00 2,20 2,60 12,2 13,1 6,30 6,50 3,40 4,70 4,80 8,00 2,20 2,60 E10,3 12,2 13,1 6,30 6,50 4,80 4,80 4,80 8,00 8,00 8,00 8,00 8,00 8,00 8,00 8,00 8,00 8,00 8,00 8,00 8,00 8,00 8,00 8,00 8,00 8,00 8,00 8,00 8,00 8,00 8,00 8,00 8,00 8,00 8,00 8,00 8,00 8,00 8,00 8,00 8,00 </td <td>E8,3/4</td> <td>8,10</td> <td></td> <td>3/96ndar</td> <td>ds iteb. ai/cat</td> <td>alogostand</td> <td><u> </u></td> <td>E93</td> <td>2-bc</td> <td>§,10</td> <td>6,50</td> <td>1,60</td> <td>2,00</td> <td></td> <td></td>	E8,3/4	8,10		3/96ndar	ds iteb. ai/cat	alogostand	<u> </u>	E93	2-bc	§ ,10	6,50	1,60	2,00		
9,80 10,2 4,88 5,00 2,88 3,00 3,50 3,50 1,50 1,50 1,88 1,00 1,02 4,88 1,00 4,05 4,05 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 1,00 <th< td=""><td>E8,8/2</td><td>8,60</td><td>9,40</td><td>3,85</td><td>4,15</td><td>1,78 1,78</td><td>3093</td><td></td><td></td><td>5,07</td><td>5,33</td><td>1,78</td><td>2,02</td><td>E8,8/2</td><td>FEE9</td></th<>	E8,8/2	8,60	9,40	3,85	4,15	1,78 1,78	3093			5,07	5,33	1,78	2,02	E8,8/2	FEE9
10.0 10.5 5.36 6.65 4.50 4.05 4.35 7.60 8.00 2.20 2.60 2.60 12.2 13.1 6.30 6.50 3.40 3.70 4.80 8.90 9.50 3.40 3.70 E134 12.2 13.2 6.86 6.15 6.00 6.30 4.50 4.70 10.4 2.60 3.40 3.70 E134 15.7 16.3 6.30 6.30 6.30 4.70 10.4 2.60 2.90 E134 18.6 16.7 16.3 6.30 6.30 6.30 6.40 10.4 10.4 2.60 2.90 E134 18.6 16.7 6.30 6.30 6.40 6.40 6.40 6.40 6.40 6.40 6.40 6.40 6.40 6.40 6.40 6.40 6.40 6.40 6.40 6.40 6.40 6.40 6.40 6.40 6.40 6.40 6.40 6.40 6.40	E10/3	9,80	10,2	4,88	5,00	2,88	3,00			7,00	7,30	2,88	3,00	E10/3	FEE10
12.2 13.1 6,30 6,50 3,40 3,70 4,50 4,50 6,50 3,40 3,70 E12. 12.8 13.2 6,85 6,15 6,00 6,30 4,50 4,70 10,0 10,4 2,60 2,90 E13/4 18.6 16.7 16.3 7,00 7,30 4,60 5,00 6,10 11,7 12.3 3,80 4,20 E16/5 18.6 16.7 7,90 8,20 4,80 5,00 6,10 11,7 12.3 3,80 4,20 E16/5 18.6 19.4 7,80 8,20 4,80 5,20 6,40 14,7 4,60 4,70 E16/5 14,8 4,90 4,70 E16/5 14,7 4,60 4,70 E16/5 14,7 4,60 4,70 8,70 14,7 4,60 4,70 14,0 4,70 E16/5 14,0 14,0 14,0 4,70 E16/5 14,0 14,0 14,0 14,0 14,	E10,2/5	10,0	10,5	5,35	5,65	4,50	4,90			7,60	8,00	2,20	2,60		FEE10,2; EE10/11
12.8 13.2 5.85 6,15 6,00 6,30 4,50 1,00 10,4 2.60 2,90 2,90 18.5 16.7 16.3 16.0 6,00 6,30 4,70 17.0 17.0 17.0 2.00 2.00 2.00 17.0 17.0 18.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17.0 17	E13/4	12,2	13,1	6,30	6,50	3,40	3,70			8,90	9,50	3,40	3,70	E13/4	FEE12,7A; EF12,6
15.7 16.3 7.00 7.30 4.60 5.00 5.40 11.7 12.3 3.80 4.20 E16/5 15.5 16.7 7.00 8.20 4.80 5.70 6.10 11.3 11.9 4.40 4.70 E16/5 18.6 18.6 18.2 4.80 5.20 5.40 5.80 14.2 14.8 4.70 E16/5 18.6 18.97 7.80 8.20 4.88 5.50 14.0 14.7 4.77 4.70 E16/5 18.8 18.97 19.61 6.20 5.40 5.80 14.7 14.7 4.70 4.70 E16/5 19.4 18.61 6.80 6.50 6.70 7.40 14.7 14.7 4.67 4.70 E16/5 24.3 24.9 6.80 6.50 6.20 6.00 18.6 6.20 6.00 18.6 6.00 18.6 6.00 18.6 6.00 18.6 6.00 18.6 18.6 <td>E13/6</td> <td>12,8</td> <td>13,2</td> <td>5,85</td> <td>6,15</td> <td>00'9</td> <td>6,30</td> <td></td> <td></td> <td>10,0</td> <td>10,4</td> <td>2,60</td> <td>2,90</td> <td></td> <td>EE13</td>	E13/6	12,8	13,2	5,85	6,15	00'9	6,30			10,0	10,4	2,60	2,90		EE13
15.5 16.7 7.90 8.20 4.70 6.10 11.3 11.9 4.40 4.70 E16/5 18.6 19.4 7.80 8.20 4.80 5.20 5.40 5.80 14.2 14.8 4.70 E16/5 1.8 18.97 19.61 7.80 8.28 4.88 5.50 5.84 14.75 4.67 4.83 5.70 14.7 4.67 4.83 5.70 5.84 14.75 4.67 4.83 5.80 5.84 14.75 4.67 4.83 5.80 5.84 14.75 14.7 4.67 4.83 5.80 5.84 14.75 14.7 4.67 4.83 5.80 5.80 5.80 5.80 5.80 5.80 5.80 5.80 5.80 5.80 5.80 5.80 5.80 5.80 5.80 5.80 5.80 5.80 5.80 5.80 5.80 5.80 5.80 5.80 5.80 5.80 5.80 5.80 5.80 5.80 <	E16/4,8	15,7	16,3	7,00	7,30	4,60	5,00			11,7	12,3	3,80	4,20		FEE16A; EE16
18,6 19,4 7,80 8,20 4,80 5,50 5,40 5,80 14,2 14,8 4,70 4,70 4,67 4,83 4,70 1,8 18,97 19,61 7,92 8,28 4,63 4,88 5,59 5,84 14,05 14,7 4,67 4,83 700 19,4 20,8 10,2 5,40 5,90 7,00 7,40 14,1 14,7 5,50 5,90 520/6 24,3 26,8 12,3 12,8 6,90 7,50 8,70 14,1 14,7 5,50 5,90 520/6 5,90 5,90 5,90 5,90 17,90 6,60 18,60 18,60 18,60 18,60 18,60 19,70 11,0 1,0 18,60 19,20 19,80 10,4 11,0 10,90 10,60 10,4 11,0 10,90 10,60 10,4 11,0 10,90 10,60 20,7 10,4 11,0 10,80 10,60 20,7 20,7	E16/5	15,5	16,7	7,90	8,20	4,30	4,70			11,3	11,9	4,40	4,70	E16/5	FEE16,1; EF16
18, 4 19,61 7,92 8,28 4,68 5,59 5,84 14,05 14,7 4,67 4,83 4,83 19,4 20,8 9,80 10,2 5,40 5,90 7,00 7,40 14,1 14,7 5,50 5,90 E20/6 24,3 26,8 10,2 6,40 8,70 6,60 17,50 17,50 17,50 17,50 17,50 17,50 18,60 18,60 19,4 6,05 6,65 6,20 6,60 18,60 19,4 6,05 6,65 6,60 18,60 19,4 6,05 6,65 6,60 18,60 19,4 6,05 6,65 6,60 18,60 19,81 6,05 6,60 18,60 19,4 11,0 10,4 11,0 11,0 11,8 20,5 10,4 11,0 11,8 20,5 10,4 11,0 11,8 20,5 10,4 11,0 11,8 20,5 10,4 11,0 11,8 20,7 20,5 10,4 10,0	E19/5	18,6	19,4	7,80	8,20	4,80	5,20			14,2	14,8	4,30	4,70		FEE19A; EE19
19,4 20,8 9,80 10,2 5,90 7,00 7,40 14,1 14,7 5,50 5,90 E20/6 24,3 25,8 12,3 12,8 6,90 7,50 8,70 9,20 17,5 18,3 7,00 7,50 E25/7 5,3 24,9 25,9 9,30 9,70 6,65 6,20 6,60 18,6 19,4 6,05 E25/7 5,3 24,9 25,9 9,27 9,65 6,10 6,60 18,6 19,4 6,05 6,60 E25/7 29,5 30,6 12,9 10,4 11,0 7,90 8,50 19,5 11,0 11,0 31,3 32,9 15,8 16,4 8,80 9,50 11,2 11,8 22,7 23,7 8,90 9,50 E32/9 31,3 36,5 14,4 12,4 13,0 9,72 9,51 26,2 9,7 10,4 10,0 27,5 23,7 8,90 9,50	E19,3/4,8	18,97	19,61	7,92	8,28	4,63	4,88			14,05	14,7	4,67	4,83		EE-187; EE19/16
24,3 25,8 12,3 12,8 6,90 7,50 8,70 9,20 17,5 18,3 7,00 7,50 E25/7 3,4,9 25,9 9,30 9,70 6,65 6,65 6,20 6,60 18,6 19,4 6,05 6,65 E25/7 3,3 24,9 25,9 9,27 6,10 6,65 6,20 6,60 18,65 19,4 6,05 6,60 18,65 19,4 6,05 6,60 18,65 19,4 6,05 6,60 18,65 19,4 6,05 6,60 18,65 19,67 10,4 11,0 7,90 8,50 10,4 11,0 10,4 11,2 11,2 11,2 11,2 11,2 11,2 11,2 11,2 11,2 11,2 11,2 11,2 11,2 11,2 11,2 11,2 11,2 11,2 11,2 11,2 11,2 11,2 11,2 11,2 11,2 11,2 11,2 11,2 11,2 11,2 11,2 <	E20/6	19,4	20,8	9,80	10,2	5,40	2,90			14,1	14,7	5,50	2,90	E20/6	FEE20,1; EF20
5, 24,9 25,9 9,30 9,70 6,65 6,22 6,60 18,6 19,4 6,05 6,65 3,3 24,9 25,9 9,27 9,65 6,10 6,22 6,60 18,55 19,81 6,10 6,65 3,3 24,9 25,9 1,2 10,4 11,0 7,90 8,50 19,5 10,4 11,0 2,70 8,50 10,4 11,0 11,2 11,8 2,7 23,7 8,90 9,50 11,2 11,8 2,7 23,7 8,90 9,50 11,2 11,8 2,7 23,7 8,90 9,50 11,8 2,7 24,1 9,40 10,0 9,50 22,7 23,7 8,90 9,50 9,50 24,1 9,40 10,0 9,70 10,0 9,60 25,0 26,2 9,10 10,0 9,70 10,0 10,0 26,2 9,10 10,0 9,70 10,0 10,0 10,0 26,2 26,2 9,10 10,0 <td>E25/7</td> <td>24,3</td> <td>25,8</td> <td>12,3</td> <td>12,8</td> <td>06'9</td> <td>7,50</td> <td></td> <td>9,20</td> <td>17,5</td> <td>18,3</td> <td>7,00</td> <td>7,50</td> <td>E25/7</td> <td>FEE25,1; EF25</td>	E25/7	24,3	25,8	12,3	12,8	06'9	7,50		9,20	17,5	18,3	7,00	7,50	E25/7	FEE25,1; EF25
5,324,925,99,279,656,106,486,226,6018,5519,816,106,6018,5519,816,106,6018,5510,411,07,908,5019,5010,411,07,908,5010,411,010,411,011,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,211,2<	E25,4/6	24,9	25,9	9,30	9,70	6,05	6,65			18,6	19,4	6,05	6,65		FEE25,4A
29,5 30,6 12,9 13,5 10,4 11,0 7,90 8,50 19,5 10,4 11,0 7,90 8,50 10,5 10,4 11,0 11,0 11,2 11,2 11,8 22,7 23,7 8,90 9,50 E32/9 32,5 33,9 13,5 14,1 12,4 13,0 9,00 9,60 23,1 24,1 9,40 10,0 E32/9 33,9 35,3 13,9 14,64 8,90 9,72 9,51 26,2 9,10 9,70 10,3 34,5 35,7 15,2 15,8 9,70 10,3 9,20 9,80 24,5 25,5 9,70 10,3 39,5 40,7 16,7 17,3 10,4 10,0 10,0 10,6 27,5 28,5 9,70 11,0 40,7 16,3 17,18 12,19 10,0 10,6 27,5 28,5 9,70 11,0		24,9	25,9	9,27	9,65	6,10	6,48			18,55	19,81	6,10	09'9		EE24/25; EE25/19
31,3 32,9 15,8 16,4 8,80 9,50 11,2 11,8 22,7 23,7 8,90 9,50 E32/9 32,5 33,9 13,6 14,1 12,4 13,0 9,00 23,1 24,1 9,40 10,0 9 33,9 35,3 13,9 14,64 8,90 9,72 9,60 25,0 9,10 9,70 10,0 1 34,5 15,2 15,8 9,70 10,3 9,20 9,80 24,5 26,5 9,70 10,3 1 39,5 40,7 16,7 17,8 10,0 10,0 10,6 27,5 28,5 9,70 11,0 3 40,27 41,87 16,3 17,18 12,19 10,08 10,68 28,55 29,59 12,19 13,1	E30/11	29,5	30,6	12,9	13,5	10,4	11,0			19,5	20,5	10,4	11,0		FEE30A; EE30
32,5 33,9 13,5 14,1 12,4 13,0 9,00 9,60 23,1 24,1 9,40 10,0 33,9 35,3 13,9 14,64 8,90 9,72 9,51 10,05 25,0 9,10 9,70 10,3 34,5 35,7 15,2 15,8 9,70 10,3 9,20 9,80 24,5 25,5 9,70 10,3 39,5 40,7 16,7 17,3 10,4 11,0 10,0 10,6 27,5 28,5 9,70 11,0 40,27 41,87 16,38 17,18 12,19 12,19 10,08 10,68 28,55 29,59 12,19 13,1	E32/9	31,3	32,9	15,8	16,4	8,80	9,50			22,7	23,7	8,90	9,50	E32/9	FEE32,1; EF32
33,9 35,3 13,9 14,64 8,90 9,72 9,51 10,05 26,0 26,2 9,10 9,70 9,70 34,5 35,7 15,2 15,8 9,70 10,3 9,20 9,80 24,5 25,5 9,70 10,3 39,5 40,7 16,7 17,3 10,4 11,0 10,0 10,6 27,5 28,5 9,70 11,0 40,27 41,87 16,38 17,18 12,19 12,95 10,08 10,68 28,55 29,59 12,19 13,1	E33/13	32,5	33,9	13,5	14,1	12,4	13,0			23,1	24,1	9,40	10,0		FEE33A; EE33
34,5 35,7 15,2 15,8 9,70 10,3 9,20 9,80 24,5 25,5 9,70 10,3 39,5 40,7 16,7 17,3 10,4 11,0 10,0 10,6 27,5 28,5 9,70 11,0 40,27 41,87 16,38 17,18 12,19 10,08 10,68 28,55 29,59 12,19 13,1	E34,6/9	33,9	35,3	13,9	14,64	8,90				25,0	26,2	9,10	9,70		EE375; EE35/28B
39,5 40,7 16,7 17,3 10,4 11,0 10,0 10,6 27,5 28,5 9,70 11,0 40,27 41,87 16,38 17,18 12,19 12,19 10,68 28,55 29,59 12,19 13,1	E35/10	34,5	35,7	15,2	15,8	9,70				24,5	25,5	9,70	10,3		FEE35A; EE35
40,27 41,87 16,38 17,18 12,19 12,95 10,08 10,68 28,55 29,59 12,19 13,1	E40/11	39,5	40,7	16,7	17,3	10,4				27,5	28,5	9,70	11,0		FEE40A; EE40
	E41/13	40,27	41,87	16,38	17,18	12,19				28,55	29,59	12,19	13,1		EE21; EE41/33C

	,	A	,	В	3	r.	Q D			E	,	F		
Size	۲	mm	Ŀ	mm	шш	E	mm	E	E	mm	=	mm	IEC 61246 ^a references	Industrial references
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Мах.	Min.	Max.	Min.	Max.		
E42/15	41,3	43,0	20,8	21,2	14,7	15,2	14.8	15,5	29,5	30,7	11,7	12,2	E42/15	FEE42A
E42/20	41,3	43,0	20,8	21,2	19,2	20,0	14,8	15,5	29,5	30,7	11,7	12,2	E42/20	FEE42B
E47/16	46,1	47,88	19,4	1938331	16,35 FC	16.87tel	12:01	12,5	31,72	32,56	15,35	15,87		EE625; EE47/39
E50/15	49,3	51,0	21,0	21,6	14,2	15,0	12,5	13,1	34,3	35,7	14,2	15,0		EE50A; EE50
E55/21	54,1	56,2	27,2	27,8	26C 63098	8100.83	18,5	19,3	37,5	38,7	16,7	17,2	E55/21	FEE55,2A
E55/25	54,1	56,2 mp	27,2	27,8 aac4d	243 183682/jed	253093-8-	1815	19,3	37,5	38,7	16,7	17,2	E55/25	FEE55,2B
E60/16	59,2	61,1	22,0	22,6	15,2	16,0	13,7	14,0	43,7	45,3	15,2	16,0		FEE60A; EE60
E65/27	63,8	66,5	32,2	32,8	26,6	27,4	22,2	23,0	44,2	45,7	19,3	20,0	E65/27	FEE65,2
a Withdraw	Withdrawn publication.	ion.												

4.2.2 Effective parameter and A_{\min} values

The effective parameter values of a pair of cores whose dimensions comply with 4.2.1 shall be as given in Table 2. For the definitions of these parameters and their calculations, reference shall be made to IEC 60205.

Table 2 – Effective parameter and $A_{
m min}$ values

Size ^a	c_1	C_2	9/	A	P _e	q	IEC 61246°	Industrial references
	mm ⁻¹	mm ⁻³	mm	mm²	mm³	mm ²	reterences	
E5,3/2	4,850 4	1.863 oSTAI	12,6 ARD	2,60 EVIE	32,9	2,54 B		
E6,3/2	3,764 6	1,148 7	12,3	3,28	40,4	2,63 C	E6,3/2	FEE6,18
E8/2	3,439 7	0,639 76 3 6	18.5 uS.11	5,38	99,4	5,17 B	E8/2	FEE8
E8,3/4	2,800 3	0,401 68	19.5 19.5 63003_8.7018	6,97	136	6,48 C		FEE8,3; EE8
E8,8/2	3,154 0 https://	9:635128, iteh. ai/ca	aladstandards/sist/8	4.9302ef-153c-4a2	-J899 <u>-</u> 7	3,61 C	E8,8/2	FEE9
E10/3	2,726 6	0,324 93 aac4d5	aac4d:223982/iec-63093-	8,4018	192	8,11 B	E10/3	FEE10
E10,2/5	2,250 3	0,19383	26,1	11,6	303	11,3 C		FEE10,2; EE10/11
E13/4	2,394 6	0,192 77	29,7	12,4	369	12,2 L	E13/4	FEE12,7A; EF12,6
E13/6	1,766 3	0,103 21	30,2	17,1	517	16,9 C		EE13
E16/4,8	1,837 9	$9,651.2 \times 10^{-2}$	35,0	19,0	299	18,7 B		FEE16A; EE16
E16/5	1,872 4	9,333 3 × 10 ⁻²	37,6	20,1	754	19,4 B	E16/5	FEE16,1; EF16
E19/5	1,726 4	$7,512.0 \times 10^{-2}$	39,7	23,0	912	22,5 C		FEE19A; EE19
E19,3/4,8	1,751 0	$7,661.8 \times 10^{-2}$	40,0	22,9	914	22,6 C		EE-187; EE19/16
E20/6	1,447 3	$4,516.8 \times 10^{-2}$	46,4	32,0	1 490	31,6 B	E20/6	FEE20,1; EF20
E25/7	1,1142	$2,149.5 \times 10^{-2}$	57,8	51,8	2 990	51,5 L	E25/7	FEE25,1; EF25
E25,4/6	1,198 6	$2,984 \ 8 \times 10^{-2}$	48,1	40,2	1 930	39,4 B		FEE25,4A
E25,4/6,3	1,232 8	$3,153.8 \times 10^{-2}$	74,2	39,1	1 880	38,4 B		EE24/25; EE25/19
E30/11	0,529 47	$4,828 \ 8 \times 10^{-3}$	58,1	110	6 370	107 B		FEE30A; EE30
E32/9	0,893 64	10,746 × 10 ⁻³	74,3	83,2	6 180	81,4 L	E32/9	FEE32,1; EF32
E33/13	0,548 84	$4,585\ 3\times10^{-3}$	65,7	120	7 860	114 B		FEE33A; EE33
E34,6/9	0,819 44	$9,651.6 \times 10^{-3}$	69,5	84,9	5 910	83,6 B		EE375; EE35/28B
E35/10	0,660 20	$6,229.0 \times 10^{-3}$	70,0	106	7 420	100 C		FEE35A; EE35
E40/11	0,606 50	4,749 4 × 10 ⁻³	77,5	128	068 6	114 C		FEE40A; EE40
E41/13	0,495 37	$3,161\ 1\times 10^{-3}$	77,6	157	12 200	151 L		EE21; EE41/33C