
Specifikacija radijskega podatkovnega sistema (RDS) za VHF/FM zvokovno radiodifuzijo v frekvenčnem območju od 87,5 MHz do 108,0 MHz (IEC 62106:2000)

(istoveten EN 62106:2001)

Specification of the radio data system (RDS) for VHF/FM sound broadcasting in the frequency range from 87,5 to 108,0 MHz (IEC 62106:2000)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 62106:2007](https://standards.iteh.ai/catalog/standards/sist/5a64504e-663b-40f1-a079-d28ba92acfe9/sist-en-62106-2007)

<https://standards.iteh.ai/catalog/standards/sist/5a64504e-663b-40f1-a079-d28ba92acfe9/sist-en-62106-2007>

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 62106:2007

<https://standards.iteh.ai/catalog/standards/sist/5a64504e-663b-40f1-a079-d28ba92acfe9/sist-en-62106-2007>

English version

**Specification of the radio data system (RDS)
for VHF/FM sound broadcasting
in the frequency range from 87,5 to 108,0 MHz
(IEC 62106:2000)**

Spécification du système de radiodiffusion
de données (RDS) pour la radio
à modulation de fréquence
dans la bande 87,5 à 108,0 MHz
(CEI 62106:2000)

Spezifikation des Radio-Daten-Systems
(RDS) für den VHF/FM Tonrundfunk
im Frequenzbereich 87,5 bis 108,0 MHz
(IEC 62106:2000)

**iTeh STANDARD PREVIEW
(standards.iteh.ai)**

[SIST EN 62106:2007](https://standards.iteh.ai/catalog/standards/sist/5a64504e-663b-40fl-a079-44893401e/sist-en-62106-2001)

<https://standards.iteh.ai/catalog/standards/sist/5a64504e-663b-40fl-a079-44893401e/sist-en-62106-2001>
This European Standard was approved by CENELEC on 2000-04-01. CENELEC members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration.

Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CENELEC member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CENELEC member into its own language and notified to the Central Secretariat has the same status as the official versions.

CENELEC members are the national electrotechnical committees of Austria, Belgium, Czech Republic, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Luxembourg, Malta, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland and United Kingdom.

CENELEC

European Committee for Electrotechnical Standardization
Comité Européen de Normalisation Electrotechnique
Europäisches Komitee für Elektrotechnische Normung

Central Secretariat: rue de Stassart 35, B - 1050 Brussels

Foreword

The text of document 100A/134A/FDIS, future edition 1 of IEC 62106, prepared by SC 100A, Multimedia end-user equipment, of IEC TC 100, Audio, video and multimedia systems and equipment, was submitted to the IEC-CENELEC parallel vote and was approved by CENELEC as EN 62106 on 2000-04-01.

This European Standard supersedes EN 50067:1998.

The following dates were fixed:

- latest date by which the EN has to be implemented at national level by publication of an identical national standard or by endorsement (dop) 2002-07-01
- latest date by which the national standards conflicting with the EN have to be withdrawn (dow) 2002-07-01

Endorsement notice

The text of the International Standard IEC 62106:2000 was approved by CENELEC as a European Standard without any modification.

In the official version, in annex Q, Bibliography, the following note has to be added for the standard indicated:

IEC 60315-9 NOTE Harmonized as EN 60315-9:1996 (not modified).

[SIST EN 62106:2007](https://standards.iteh.ai/catalog/standards/sist/5a64504e-663b-40f1-a079-d28ba92acfe9/sist-en-62106-2007)

<https://standards.iteh.ai/catalog/standards/sist/5a64504e-663b-40f1-a079-d28ba92acfe9/sist-en-62106-2007>

INTERNATIONAL STANDARD

IEC 62106

First edition
2000-01

**Specification of the radio data system (RDS)
for VHF/FM sound broadcasting
in the frequency range
from 87,5 to 108,0 MHz**

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 62106:2007](#)

<https://standards.iteh.ai/catalog/standards/sist/5a64504e-663b-40f1-a079-d28ba92acfe9/sist-en-62106-2007>

© IEC 2000 — Copyright - all rights reserved

No part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Electrotechnical Commission 3, rue de Varembé Geneva, Switzerland
Telefax: +41 22 919 0300 e-mail: inmail@iec.ch IEC web site <http://www.iec.ch>



Commission Electrotechnique Internationale
International Electrotechnical Commission
Международная Электротехническая Комиссия

PRICE CODE **XF**

For price, see current catalogue

INTERNATIONAL ELECTROTECHNICAL COMMISSION

SPECIFICATION OF THE RADIO DATA SYSTEM (RDS) FOR VHF/FM SOUND
BROADCASTING IN THE FREQUENCY RANGE FROM 87,5 TO 108,0 MHZ

FOREWORD

- 1) The IEC (International Electrotechnical Commission) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of the IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, the IEC publishes International Standards. Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. The IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of the IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested National Committees.
- 3) The documents produced have the form of recommendations for international use and are published in the form of standards, technical specifications, technical reports or guides and they are accepted by the National Committees in that sense.
- 4) In order to promote international unification, IEC National Committees undertake to apply IEC International Standards transparently to the maximum extent possible in their national and regional standards. Any divergence between the IEC Standard and the corresponding national or regional standard shall be clearly indicated in the latter.
- 5) The IEC provides no marking procedure to indicate its approval and cannot be rendered responsible for any equipment declared to be in conformity with one of its standards.

This International Standard IEC 62106 has been prepared by the IEC Subcommittee 100A: Multimedia end-user equipment, of the Technical Committee 100: Audio, video and multimedia systems and equipment.

This standard is based on the European CENELEC Standard EN 50067:1998 prepared by the RDS Forum, using an earlier specification [8] that was originally developed within the European Broadcasting Union. It was submitted to the National Committees for voting under the Fast Track Procedure as the following documents:

FDIS	Report on voting
100A/134A/FDIS	100A/139/RVD

Full information on the voting for the approval of this standard can be found in the report indicated in the above table.

Attention is drawn to the fact that there may be Intellectual Property Rights (IPR) in relation to certain provisions of this standard. IPR holders should notify the IEC of their claims.

This publication has not been drafted in complete accordance with the ISO/IEC Directives, Part 3.

Annexes B, C, G, H, K, L and Q are for information only.

Annexes A, D, E, F, J, M, N, and P form an integral part of this standard.

	page
3.2 Coding of information	40
3.2.1 Coding of information for control	40
3.2.1.1 Programme Identification (PI) codes and Extended Country Codes (ECC)	40
3.2.1.2 Programme-type (PTY) codes	40
3.2.1.3 Traffic-programme (TP) and traffic-announcement (TA) codes	40
3.2.1.4 Music Speech (MS) switch code	40
3.2.1.5 Decoder Identification (DI) and Dynamic PTY Indicator (PTYI) codes	41
3.2.1.6 Coding of Alternative Frequencies (AFs) in type 0A groups	41
3.2.1.7 Programme-item number (PIN) codes	46
3.2.1.8 Coding of Enhanced Other Networks information (EON)	46
3.2.2 Coding and use of information for display	50
3.2.3 Coding of clock-time and date (CT)	50
3.2.4 Coding of information for Transparent data channels (TDC)	50
3.2.5 Coding of information for In House applications (IH)	50
3.2.6 Coding of Radio paging (RP)	51
3.2.6.1 Introduction	51
3.2.6.2 Identification of paging networks	52
3.2.7 Coding of Emergency Warning Systems (EWS)	53
4 Description of features	54
5 Marking	57

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST EN 62106:2007

<https://standards.iteh.ai/catalog/standards/sist/5a64504e-663b-40f1-a079-d28ba92acfe9/sist-en-62106-2007>

ANNEXES

page

Annex A (normative) - Offset words to be used for group and block synchronization	59
Annex B (informative) - Theory and implementation of the modified shortened cyclic code	60
Annex C (informative) - Implementation of group and block synchronization using the modified shortened cyclic code	66
Annex D (normative) - Programme identification codes and Extended country codes	69
Annex E (normative) - Character definition for Programme Service name, Programme Type Name, RadioText and alphanumeric Radio paging	73
Annex F (normative) - Programme Type codes	77
Annex G (informative) - Conversion between time and date conventions	81
Annex H (informative) - Specification of the ARI system	83
Annex J (normative) - Language identification	84
Annex K (informative) - RDS logo	86
Annex L (informative) - Open data registration	87
Annex M (normative) - Coding of Radio Paging	90
Annex N (normative) - Country codes and Extended country codes for countries outside the European Broadcasting Area	126
Annex P (normative) - Index of abbreviations	131
Annex Q (informative) - Bibliography	132

ITIH STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 62106:2007
<https://standards.iteh.ai/catalog/standards/sist/5a64504e-663b-4011-a079-d28ba92acfe9/sist-en-62106-2007>

0 Scope

The Radio Data System, RDS, is intended for application to VHF/FM sound broadcasts in the range 87.5 MHz to 108.0 MHz which may carry either stereophonic (pilot-tone system) or monophonic programmes. The main objectives of RDS are to enable improved functionality for FM receivers and to make them more user-friendly by using features such as Programme Identification, Programme Service name display and where applicable, automatic tuning for portable and car radios, in particular. The relevant basic tuning and switching information therefore has to be implemented by the type 0 group (see 3.1.5.1), and it is not optional unlike many of the other possible features in RDS.

1 Modulation characteristics of the data channel (physical layer)

The Radio Data System is intended for application to VHF/FM sound broadcasting transmitters in the range 87.5 to 108.0 MHz, which carry stereophonic (pilot-tone system) or monophonic sound broadcasts (see ITU-R Recommendation BS.450-2).

It is important that radio-data receivers are not affected by signals in the multiplex spectrum outside the data channel.

The system can be used simultaneously with the ARI (Autofahrer-Rundfunk-Information) system (see annex H), even when both systems are broadcast from the same transmitter. However, certain constraints on the phase and injection levels of the radio-data and ARI signals must be observed in this case (see 1.2 and 1.3).

The data signals are carried on a subcarrier which is added to the stereo multiplex signal (or monophonic signal as appropriate) at the input to the VHF/FM transmitter. Block diagrams of the data source equipment at the transmitter and a typical receiver arrangement are shown in figures 1 and 2, respectively.

[SIST EN 62106:2007](http://standards.iteh.ai/catalog/standards/sist/5a64504e-663b-40f1-a079-d28ba92acfe9/sist-en-62106-2007)

1.1 Subcarrier frequency

During stereo broadcasts the subcarrier frequency will be locked to the third harmonic of the 19-kHz pilot-tone. Since the tolerance on the frequency of the 19-kHz pilot-tone is ± 2 Hz (see ITU-R Recommendation BS.450-2), the tolerance on the frequency of the subcarrier during stereo broadcasts is ± 6 Hz.

During monophonic broadcasts the frequency of the subcarrier will be $57 \text{ kHz} \pm 6 \text{ Hz}$.

1.2 Subcarrier phase

During stereo broadcasts the subcarrier will be locked either in phase or in quadrature to the third harmonic of the 19 kHz pilot-tone. The tolerance on this phase angle is $\pm 10^\circ$, measured at the modulation input to the FM transmitter.

In the case when ARI and radio-data signals are transmitted simultaneously, the phase angle between the two subcarriers shall be $90^\circ \pm 10^\circ$.


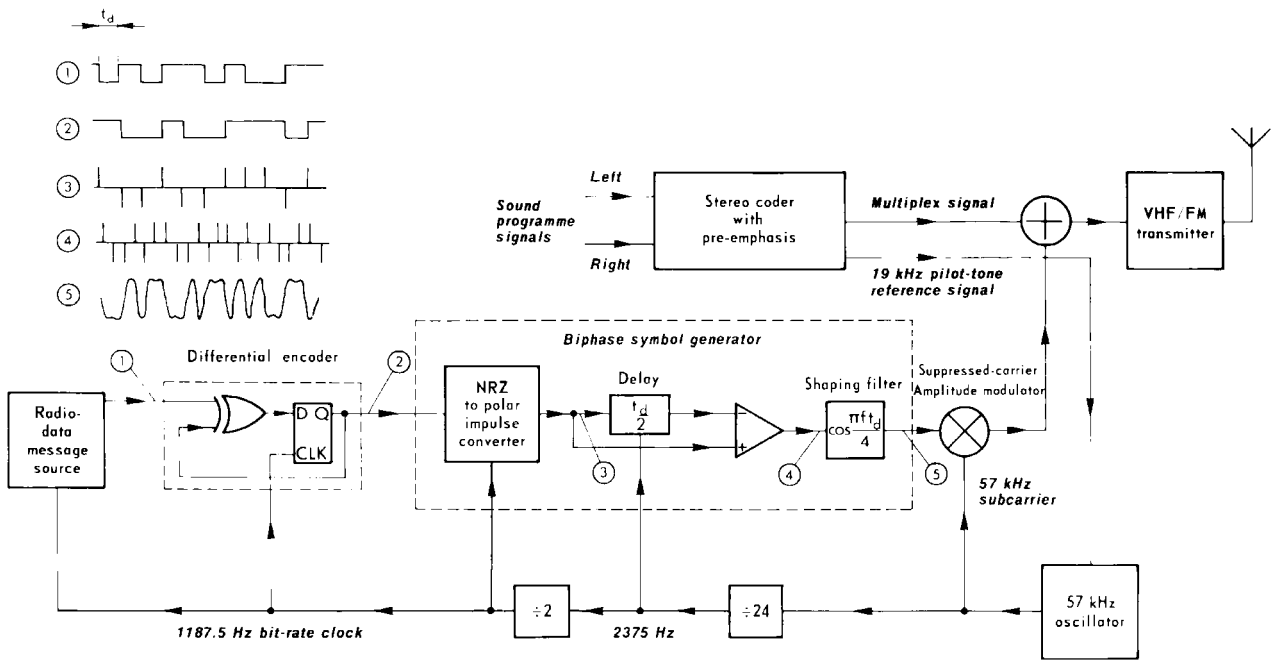


Figure 1 - Block diagram of radio-data equipment at the transmitter

iTeh STANDARD PREVIEW
(standards.iteh.ai)

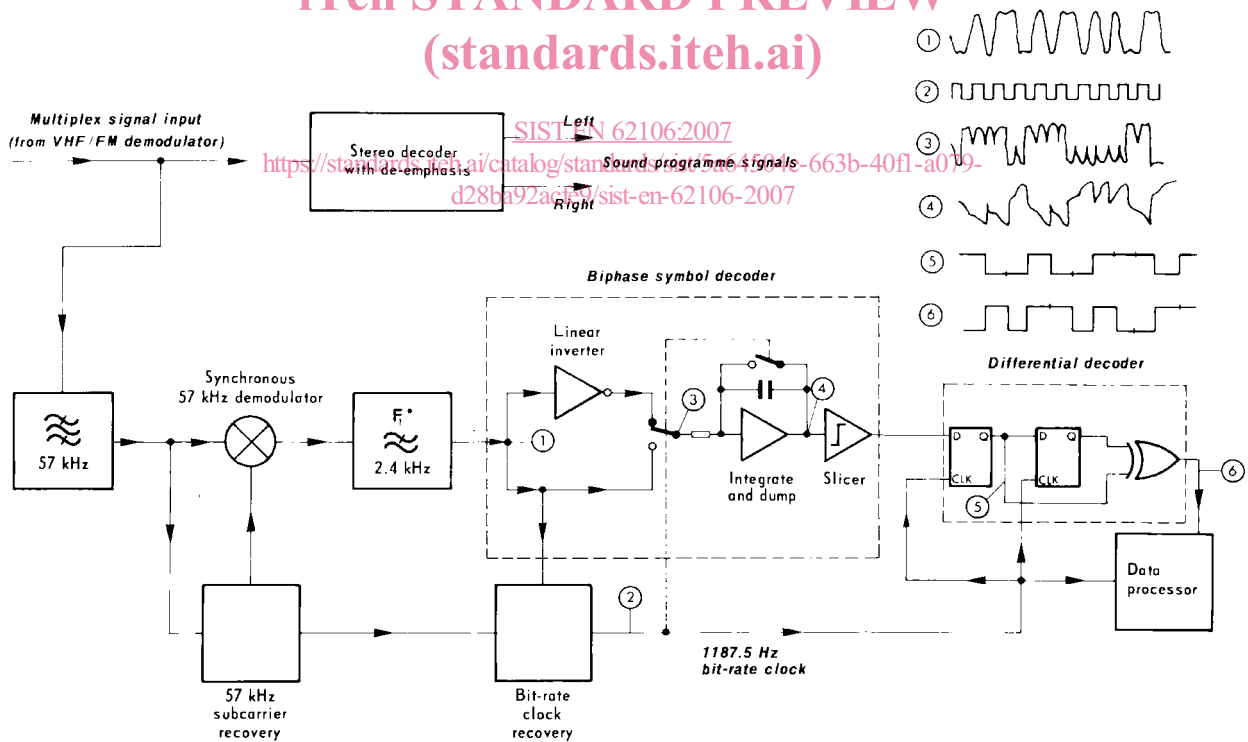

The overall data-shaping in this decoder comprises the filter F_1 and the data-shaping inherent in the biphasic symbol decoder. The amplitude/frequency characteristic of filter F_1 is, therefore, not the same as that given in figure 3.

Figure 2 - Block diagram of a typical radio-data receiver/decoder

1.3 Subcarrier level

The deviation range of the FM carrier due to the unmodulated subcarrier is from ± 1.0 kHz to ± 7.5 kHz. The recommended best compromise is ± 2.0 kHz ¹⁾. The decoder/demodulator shall also operate properly when the deviation of the subcarrier is varied within these limits during periods not less than 10 ms.

In the case when ARI (see annex H) and radio-data signals are transmitted simultaneously, the recommended maximum deviation due to the radio-data subcarrier is ± 1.2 kHz and that due to the unmodulated ARI subcarrier shall be reduced to ± 3.5 kHz.

The maximum permitted deviation due to the composite multiplex signal is ± 75 kHz.

1.4 Method of modulation

The subcarrier is amplitude-modulated by the shaped and biphase coded data signal (see 1.7). The subcarrier is suppressed. This method of modulation may alternatively be thought of as a form of two-phase phase-shift-keying (psk) with a phase deviation of $\pm 90^\circ$.

1.5 Clock-frequency and data-rate

The basic clock frequency is obtained by dividing the transmitted subcarrier frequency by 48. Consequently, the basic data-rate of the system (see figure 1) is 1187.5 bit/s ± 0.125 bit/s.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

1.6 Differential coding

The source data at the transmitter are differentially encoded according to the following rules:

<https://standards.iteh.ai/catalog/standards/sist/5a64504e-663b-40f1-a079-d28ba92acfe9/sist-en-62106-2007>

Table 1 - Encoding rules

Previous output (at time t_{i-1})	New input (at time t_i)	New output (at time t_i)
0	0	0
0	1	1
1	0	1
1	1	0

where t_i is some arbitrary time and t_{i-1} is the time one message-data clock-period earlier, and where the message-data clock-rate is equal to 1187.5 Hz.

¹⁾ With this level of subcarrier, the level of each sideband of the subcarrier corresponds to half the nominal peak deviation level of ± 2.0 kHz for an "all-zeroes" message data stream (i.e. a continuous bit-rate sine-wave after biphase encoding).

Thus, when the input-data level is 0, the output remains unchanged from the previous output bit and when an input 1 occurs, the new output bit is the complement of the previous output bit.

In the receiver, the data may be decoded by the inverse process:

Table 2 - Decoding rules

Previous input (at time t_{i-1})	New input (at time t_i)	New output (at time t_i)
0	0	0
0	1	1
1	0	1
1	1	0

The data is thus correctly decoded whether or not the demodulated data signal is inverted.

1.7 Data-channel spectrum shaping

The power of the data signal at and close to the 57 kHz subcarrier is minimized by coding each source data bit as a biphas symbol.

This is done to avoid data-modulated cross-talk in phase-locked-loop stereo decoders, and to achieve compatibility with the ARI system. The principle of the process of generation of the shaped biphas symbols is shown schematically in figure 1. In concept each source bit gives rise to an odd impulse-pair, $e(t)$, such that a logic 1 at source gives:

$$e(t) = \delta(t) - \delta(t - t_d/2) \tag{1}$$

and a logic 0 at source gives:

$$e(t) = -\delta(t) + \delta(t - t_d/2) \tag{2}$$

These impulse-pairs are then shaped by a filter $H_T(f)$, to give the required band-limited spectrum where:

$$H_T(f) = \begin{cases} \cos \frac{\pi f t_d}{4} & \text{if } 0 \leq f \leq 2/t_d \\ 0 & \text{if } f > 2/t_d \end{cases} \tag{3}$$

and here

$$t_d = \frac{1}{1187.5} \text{ s}$$

The data-spectrum shaping filtering has been split equally between the transmitter and receiver (to give optimum performance in the presence of random noise) so that, ideally, the data filtering at the receiver should be identical to that of the transmitter, i.e. as given above in equation (3). The overall data-channel spectrum shaping $H_o(f)$ would then be 100% cosine roll-off.

The specified transmitter and receiver low-pass filter responses, as defined in equation (3) are illustrated in figure 3, and the overall data-channel spectrum shaping is shown in figure 4.

The spectrum of the transmitted biphas-coded radio-data signal is shown in figure 5 and the time-function of a single biphas symbol (as transmitted) in figure 6.

The 57 kHz radio-data signal waveform at the output of the radio-data source equipment may be seen in the photograph of figure 7.

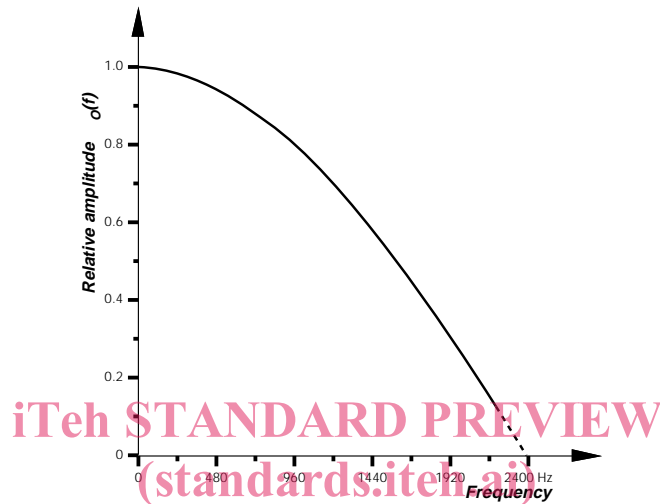


Figure 3 - Amplitude response of the specified transmitter or receiver data-shaping filter
<https://standards.iteh.ai/catalog/standards/sist/5a64504e-663b-40fl-a079-d28ba92acfe9/sist-en-62106-2007>

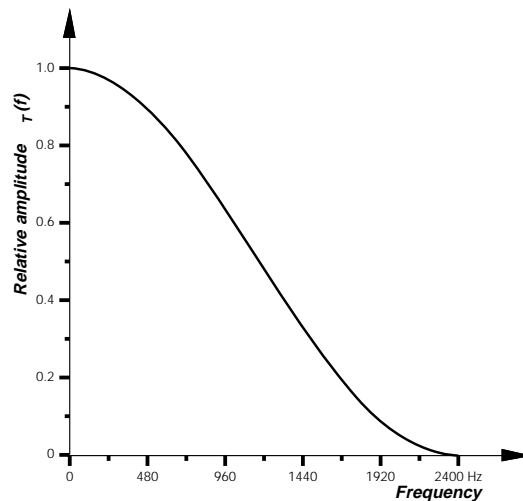


Figure 4 - Amplitude response of the combined transmitter and receiver data-shaping filters

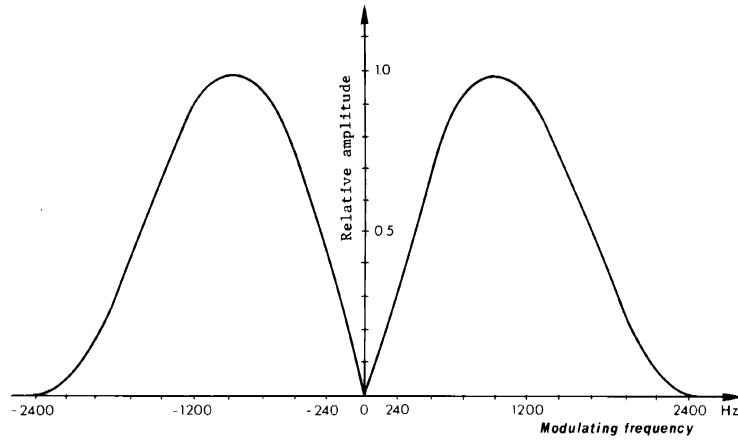


Figure 5 - Spectrum of biphase coded radio-data signals

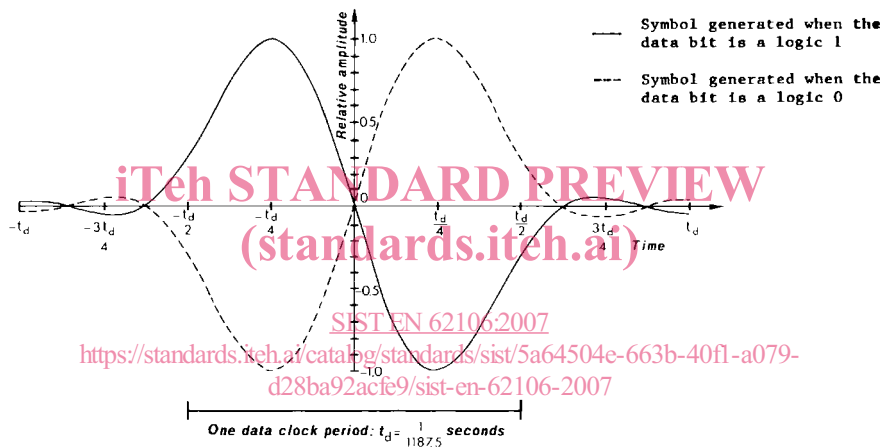


Figure 6 - Time-function of a single biphase symbol

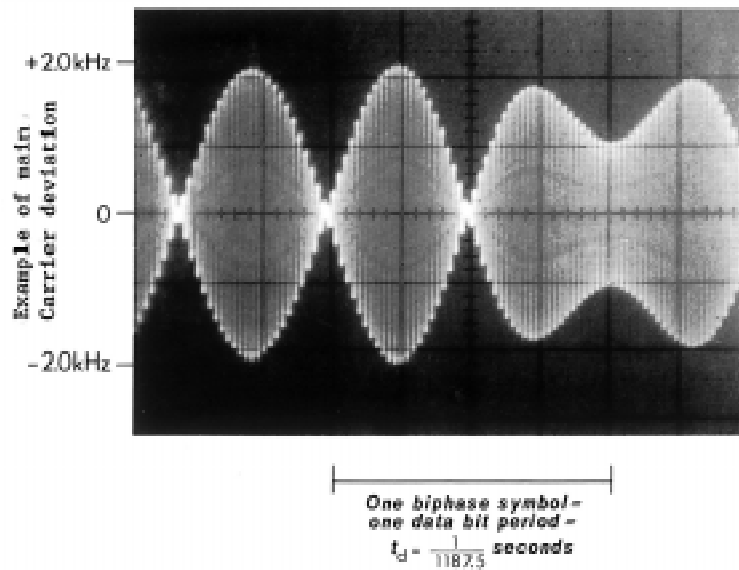


Figure 7 - 57 kHz radio-data signals