



**SLOVENSKI STANDARD**  
**SIST ETS 300 132-1 E1:2006**

**01-februar-2006**

---

Equipment Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 1: Operated by alternating current (ac) derived from direct current (dc) sources

Equipment Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 1: Operated by alternating current (ac) derived from direct current (dc) sources

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

<https://standards.iteh.ai/catalog/standards/sist/469476f7-07fb-49d2-a4d3-1d37a5ba9aca/sist-ets-300-132-1-e1-2006>

**Ta slovenski standard je istoveten z: ETS 300 132-1 Edition 1**

---

**ICS:**

33.050.01	Telekomunikacijska terminalska oprema na splošno	Telecommunication terminal equipment in general
-----------	--	---


**SIST ETS 300 132-1 E1:2006**

**en**

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST ETS 300 132-1 E1:2006

<https://standards.iteh.ai/catalog/standards/sist/469476f7-07fb-49d2-a4d3-1d37a5ba9aca/sist-ets-300-132-1-e1-2006>

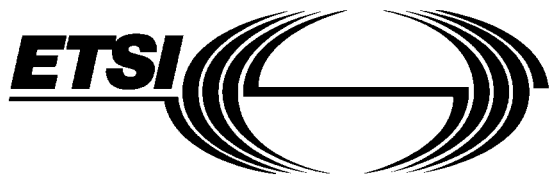

**E**UROPEAN  
**T**ELECOMMUNICATION  
**S**TANDARD

**ETS 300 132-1**

September 1996

Source: ETSI TC-EE

Reference: DE/EE-02001.1

ICS: 33.020

**Key words:** Power supply

**Equipment Engineering (EE);**  
**Power supply interface at the input to**  
**telecommunications equipment;**  
**Part 1: Operated by alternating current (ac)**  
**derived from direct current (dc) sources**

**ETSI**

European Telecommunications Standards Institute

**ETSI Secretariat**

**Postal address:** F-06921 Sophia Antipolis CEDEX - FRANCE

**Office address:** 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

**X.400:** c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

**Copyright Notification:** No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1996. All rights reserved.

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 132-1 E1:2006](https://standards.iteh.ai/catalog/standards/sist/469476f7-07fb-49d2-a4d3-1d37a5ba9aca/sist-ets-300-132-1-e1-2006)  
<https://standards.iteh.ai/catalog/standards/sist/469476f7-07fb-49d2-a4d3-1d37a5ba9aca/sist-ets-300-132-1-e1-2006>

## Contents

Foreword .....	5
1 Scope .....	7
2 Normative references .....	8
3 Definitions and abbreviations .....	9
3.1 Definitions .....	9
3.2 Abbreviations .....	9
4 Requirements .....	10
4.1 Nominal value of the supply voltage .....	10
4.2 Normal service voltage range at interface "A" .....	10
4.3 Abnormal service voltage ranges at interface "A" .....	10
4.3.1 Abnormal service voltage under steady-state conditions .....	10
4.3.2 Recovery from steady state abnormal voltage .....	11
4.4 Abnormal service voltage under temporary conditions .....	11
4.5 Voltage changes due to the regulation of secondary voltage .....	11
4.6 Supply protection at interface "A" .....	11
4.7 Surge current on connection of interface "A" .....	11
4.7.1 Limits .....	11
4.7.2 Measurement method .....	12
4.7.3 Protective device ratings .....	13
5 Earthing and bonding .....	13
6 Electrical safety requirements .....	13
6.1 General .....	13
7 EMC requirements .....	13
Annex A (informative): Information and guide on safety .....	14
Annex B (informative): Guide for measuring inrush current and for transferring the recorded pulses onto the limit chart .....	15
B.1 Measurement .....	15
B.2 Pulse waveform transformation .....	15
Annex C (informative): Identification of interface A .....	17
Annex D (informative): Bibliography .....	18
History .....	19

STANDARD PREVIEW  
(standards.iteh.ai)

SIST ETS 300 132-1 E1:2006

<https://standards.iteh.ai/catalog/standards/sist/469476f7-07fb-49d2-a4d3-1d37a5ba9aca/sist-ets-300-132-1-e1-2006>

Blank page

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST ETS 300 132-1 E1:2006  
<https://standards.iteh.ai/catalog/standards/sist/469476f7-07fb-49d2-a4d3-1d37a5ba9aca/sist-ets-300-132-1-e1-2006>

## Foreword

This European Telecommunication Standard (ETS) has been produced by the Equipment Engineering (EE) Technical Committee of the European Telecommunications Standards Institute (ETSI).

This ETS details the requirements for the interface between telecommunications equipment and its power supply, and includes requirements relating to its stability and measurement. Normative references are also made to the safety aspects, in various IEC and CENELEC documents. Informative references and detailed measurement and test arrangements are contained in informative annexes.

This ETS consists of 2 parts as follows:

**Part 1: "Operated by alternating current (ac) derived from direct current (dc) sources"**

Part 2: "Operated by direct current (dc)"

Transposition dates	
Date of adoption of this ETS:	16 August 1996
Date of latest announcement of this ETS (doa):	31 December 1996
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	30 June 1997
Date of withdrawal of any conflicting National Standard (dow):	30 June 1997

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[SIST ETS 300 132-1 E1:2006](https://standards.iteh.ai/catalog/standards/sist/469476f7-07fb-49d2-a4d3-1d37a5ba9aca/sist-ets-300-132-1-e1-2006)  
<https://standards.iteh.ai/catalog/standards/sist/469476f7-07fb-49d2-a4d3-1d37a5ba9aca/sist-ets-300-132-1-e1-2006>

Blank page

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

SIST ETS 300 132-1 E1:2006  
<https://standards.iteh.ai/catalog/standards/sist/469476f7-07fb-49d2-a4d3-1d37a5ba9aca/sist-ets-300-132-1-e1-2006>



## 1 Scope

This European Telecommunication Standard (ETS) contains requirements for:

- the output performance of the (stabilized) ac power supply derived from dc sources as specified in ETS 300 132-2 [9]; and
- the input of the telecommunications equipment connected to interface "A", powered by ac not directly provided by the mains.

This ETS also makes reference to safety and EMC standards which are in accordance with the relevant European and international standards.

This ETS aims at providing compatibility between the power supply equipment and the power consuming telecommunications equipment, and also between different load units connected to the same power supply.

NOTE 1: To ensure satisfactory performance, the connection of telecommunications equipment into installations is subject to the prevailing conditions of that installation and is subject to the agreement of both parties.

NOTE 2: For dc power supply systems operated at a nominal voltage of  $-48 V_{dc}$ , ETS 300 132-2 is available.

The power supply interface, interface "A" of figure 1, is a physical point to which all the requirements are related. This point is situated between the power supply system(s) and the power consuming telecommunications equipment.

NOTE 3: Interface "A" is located at the power terminals of the telecommunications equipment. Subject to the installation preconditions, this point may be located at any other point between the power supply system and the telecommunications equipment by mutual agreement of both parties.

The requirements at interface "A" apply to

- the output of the power supply equipment or power supply installation of telecommunications centres;
- the power supply input of telecommunications equipment installed at telecommunication centres;
- telecommunications equipment, installed in customers' premises, whose power interface "A" is also used by equipment requiring a supply to this specification.

NOTE 4: Normally there is more than one load unit connected to interface "A". In some of these cases interface "A" might undergo further restrictions with respect to noise limits or other disturbances.

NOTE 5: This ETS also gives requirements on disturbances on the power supply interface "A". However, continuous wave phenomena above 20 kHz are not covered within this ETS. ETS 300 386-1 [8] is applicable for this frequency range.

NOTE 6: The transients to which immunity is specified in this ETS are characterized by a high energy content such that electrical stress may be caused. Fast transients, the effects of which appear mainly as interference, are covered by ETS 300 386-1 [8].

NOTE 7: An example of a configuration in which the interface "A" is identified is given in annex C.

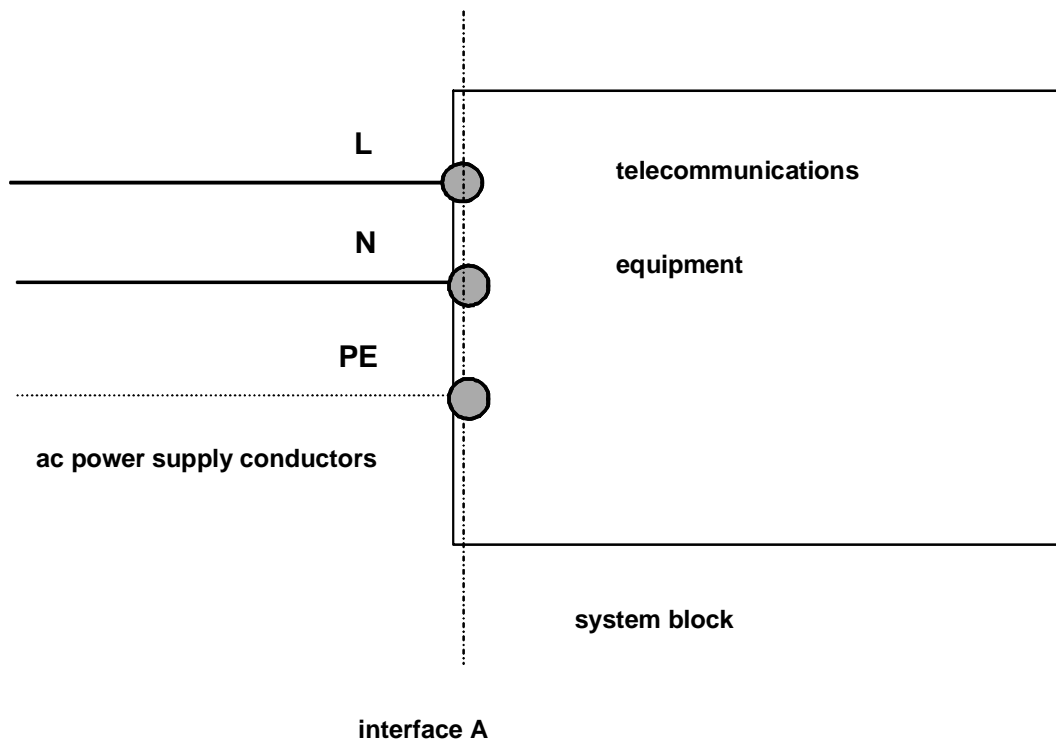


Figure 1: General identification of the power interface, interface "A"

The purpose of this ETS is:

- to enable the use of a power supply system with the same characteristics for all telecommunications equipment defined in the area of application;
- to facilitate interworking of different (types of) load units;
- to facilitate the standardization of telecommunications equipment;
- to facilitate the installation, operation and maintenance in the same network of equipment and telecommunications systems from different origins.

## 2 Normative references

This ETS incorporates by dated and undated reference provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] ETS 300 253: "Equipment Engineering (EE); Earthing and bonding of telecommunication equipment in telecommunication centres".
- [2] EN 41003 (1991): "Particular safety requirements for equipment to be connected to telecommunication networks".
- [3] EN 60950 (1992 amended 1993): "Safety of information technology equipment, including electrical business equipment".
- [4] IEC 38 (1983): "IEC standard voltages".
- [5] IEC 364-4-41 (1982): "Electrical installations of buildings - Part 4: Protection for safety - Chapter 41: Protection against electric shock".

- [6] IEC 664 (1992): "Insulation co-ordination for equipment within low voltage systems".
- [7] IEC 686 (1980): "Stabilized power supplies, ac output".
- [8] ETS 300 386-1 (1994): "Equipment Engineering (EE); Public telecommunication network equipment; Electro-Magnetic Compatibility (EMC) requirements; Part 1: Product family overview, compliance criteria and test levels".
- [9] ETS 300 132-2 (1996): "Equipment Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 2: Operated by direct current (dc)".
- [10] IEC Publication 364-5-54: "Electrical installations of buildings - Part 5: Selection and erection of electrical equipment - Chapter 54: Earthing arrangements and protective conductors".

### 3 Definitions and abbreviations

#### 3.1 Definitions

For the purposes of this ETS, the following definitions apply:

**abnormal voltage range:** The range of steady-state voltages over which the equipment will not be expected to maintain normal service but will survive undamaged.

**interface "A":** The terminals at which the ac power supply is connected to the telecommunications equipment (see figure 1).

NOTE 1: This is a functional definition and not an exact depiction of the physical location.

**nominal load conditions:** A set of values dedicated to a test performance.

**nominal voltage value:** The nominal value of the voltage that designates the type of supply.

**normal service voltage range:** The range of the steady-state voltage over which the equipment will maintain normal service.

**normal service:** The service mode where telecommunications equipment operates within its specification.

**power supply:** A power source to which telecommunications equipment is intended to be connected.

**system block:** A functional group of equipment depending for its operation and performance on its connection to the same power supply.

**telecommunication centre:** Any location where telecommunications equipment is installed and which is the sole responsibility of the operator.

#### 3.2 Abbreviations

For the purposes of this ETS, the following abbreviations apply:

ac	alternating current (also when used as a suffix to units of measurement)
dc	direct current (also when used as a suffix to units of measurement)
EUT	Equipment Under Test
GEN	Generator
$I_m$	maximum current (see subclause 4.7.1)
$I_t$	instantaneous surge current (see subclause 4.7.1)
L	Line (of ac power supply) - figure 1