

# INTERNATIONAL STANDARD

Calibration of optical time-domain reflectometers (OTDR) –  
Part 1: OTDR for single mode fibres

<https://standards.iteh.ai>  
Document Preview

[IEC 61746-1:2009](#)

<https://standards.iteh.ai/catalog/standards/iec/11230247-5ba0-4f83-862b-0495d0a9d096/iec-61746-1-2009>



## THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2009 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland  
Email: [inmail@iec.ch](mailto:inmail@iec.ch)  
Web: [www.iec.ch](http://www.iec.ch)

### About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

### About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: [www.iec.ch/searchpub](http://www.iec.ch/searchpub)

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: [www.iec.ch/online\\_news/justpub](http://www.iec.ch/online_news/justpub)

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: [www.electropedia.org](http://www.electropedia.org)

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: [www.iec.ch/webstore/custserv](http://www.iec.ch/webstore/custserv)

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: [csc@iec.ch](mailto:csc@iec.ch)

Tel.: +41 22 919 02 11

Fax: +41 22 919 03 00

IEC 61746-1:2009

<https://standards.iteh.ai/catalog/standards/iec/11230247-5ba0-4f83-862b-0495d0a9d096/iec-61746-1-2009>



IEC 61746-1

Edition 1.0 2009-12

# INTERNATIONAL STANDARD

---

**Calibration of optical time-domain reflectometers (OTDR) –  
Part 1: OTDR for single mode fibres**

iteh Standards  
(<https://standards.iteh.ai>)  
Document Preview

[IEC 61746-1:2009](#)

<https://standards.iteh.ai/catalog/standards/iec/11230247-5ba0-4f83-862b-0495d0a9d096/iec-61746-1-2009>

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

PRICE CODE **XC**

---

ICS 33.180.01

ISBN 978-2-88910-553-3

## CONTENTS

FOREWORD.....	6
INTRODUCTION.....	8
1 Scope.....	9
2 Normative references.....	9
3 Terms, definitions and symbols.....	9
4 Preparation for calibration.....	16
4.1 Organization.....	16
4.2 Traceability.....	16
4.3 Preparation.....	16
4.4 Test conditions.....	16
4.5 Documentation.....	16
5 Distance calibration – General.....	17
5.1 General.....	17
5.2 Location deviation model.....	17
5.3 Using the calibration results.....	19
5.4 Measuring fibre length.....	19
6 Distance calibration methods.....	20
6.1 General.....	20
6.2 External source method.....	20
6.2.1 Short description and advantage.....	20
6.2.2 Equipment.....	20
6.2.3 Calibration of the equipment.....	21
6.2.4 Measurement procedure.....	22
6.2.5 Calculations and results.....	23
6.2.6 Uncertainties.....	24
6.3 Concatenated fibre method.....	25
6.3.1 Short description and advantages.....	25
6.3.2 Equipment.....	25
6.3.3 Measurement procedures.....	27
6.3.4 Calculations and results.....	27
6.3.5 Uncertainties.....	28
6.4 Recirculating delay line method.....	29
6.4.1 Short description and advantage.....	29
6.4.2 Equipment.....	29
6.4.3 Measurement procedure.....	31
6.4.4 Calculations and results.....	31
6.4.5 Uncertainties.....	32
7 Loss calibration – General.....	33
7.1 General.....	33
7.2 Determination of the displayed power level $F$ .....	33
7.3 Selection of an appropriate reference loss $A_{ref}$ .....	34
7.4 Development of a test plan.....	35
7.5 Polarization dependence.....	37
7.6 Calculation of the calibration results.....	38
7.7 Using the calibration results.....	38
8 Loss calibration methods.....	38

8.1	General .....	38
8.2	Fibre standard method .....	39
8.2.1	Short description and advantage .....	39
8.2.2	Equipment .....	39
8.2.3	Measurement procedure .....	40
8.2.4	Calculations and results .....	41
8.2.5	Uncertainties .....	41
8.3	External source method (see Figure 16) .....	42
8.3.1	Short description and advantage .....	42
8.3.2	Equipment .....	42
8.3.3	Calibration of the reference loss .....	43
8.3.4	Measurement procedure .....	44
8.3.5	Calculations and results .....	45
8.3.6	Uncertainties .....	45
8.4	Splice simulator method .....	46
8.4.1	Short description and advantage .....	46
8.4.2	Equipment .....	46
8.4.3	Procedure .....	47
8.4.4	Calculations and results .....	49
8.4.5	Uncertainties .....	49
8.5	Power reduction method .....	50
8.5.1	Short description and advantage .....	50
8.5.2	Equipment .....	51
8.5.3	Measurement procedure .....	52
8.5.4	Calculations and results .....	53
8.5.5	Uncertainties .....	53
9	Reflectance calibration .....	54
9.1	Objective .....	54
9.2	Reflectance measurements (see Figure 23) .....	54
9.3	Use of the backscatter parameter, $K$ .....	54
9.4	Range of reflectance measurement .....	55
9.5	Development of a test plan .....	56
9.6	Equipment .....	57
9.7	Measurement procedure .....	58
9.7.1	Preparation .....	58
9.7.2	Taking reflectance measurements .....	58
9.7.3	Calculation and results .....	58
9.7.4	Uncertainties .....	58
Annex A (normative)	Recirculating delay line for distance calibration .....	60
Annex B (normative)	Optical fibre standard for loss calibration .....	64
Annex C (normative)	Standard splice simulator for loss calibration .....	68
Annex D (normative)	Mathematical basis .....	72
Annex E (normative)	Reflectance standard .....	75
Annex F (normative)	Simple version of reflectance standard .....	81
Annex G (informative)	OTDR basis: Backscatter theory – Reflectance measurements using an OTDR – Determination of fibre backscatter parameter .....	85
Bibliography	.....	90

Figure 1 – Definition of attenuation dead zone .....	10
Figure 2 – Representation of the location deviation $\Delta L(L)$ .....	18
Figure 3 – Equipment for calibration of the distance scale – External source method .....	21
Figure 4 – Set-up for calibrating the system insertion delay.....	22
Figure 5 – Concatenated fibres used for calibration of the distance scale.....	26
Figure 6 – Distance calibration with a recirculating delay line .....	30
Figure 7 – OTDR trace produced by recirculating delay line .....	30
Figure 8 – Determining the reference level and the displayed power level .....	34
Figure 9 – Measurement of the OTDR loss samples .....	35
Figure 10 – Region A, the recommended region for loss measurement samples .....	36
Figure 11 – Possible placement of sample points within region A.....	36
Figure 12 – External source method for testing the polarization dependence of the OTDR .....	37
Figure 13 – Reflection method for testing the polarization dependence of the OTDR .....	37
Figure 14 – Loss calibration with a fibre standard .....	39
Figure 15 – Placing the beginning of section $D_1$ outside the attenuation dead zone.....	40
Figure 16 – Loss calibration with the external source method.....	43
Figure 17 – Location and measurements for external source method .....	44
Figure 18 – Set-up for loss calibration with splice simulator .....	46
Figure 19 – OTDR display with splice simulator .....	47
Figure 20 – Measurement of the splice loss.....	48
Figure 21 – Loss calibration with "fibre-end" variant of the power reduction method .....	51
Figure 22 – Loss calibration with "long-fibre" variant of the power reduction method.....	52
Figure 23 – Parameters involved in reflectance measurements .....	54
Figure 24 – The same reflectance at the end of three fibres with different values of the backscatter parameter shows different pulse amplitudes .....	55
Figure 25 – Maximum and minimum values for the pulse amplitude, $\Delta F$ .....	56
Figure 26 – Range of reflectance measurement.....	56
Figure 27 – Determining the default displayed power level and the default location .....	57
Figure 28 – Set-up for reflectance calibration.....	58
Figure A.1 – Recirculating delay line.....	60
Figure A.2 – Measurement set-up for loop transit time $T_b$ .....	61
Figure A.3 – Calibration set-up for lead-in transit time $T_a$ .....	62
Figure B.1 – Determination of a highly linear power range.....	65
Figure B.2 – Testing the longitudinal backscatter uniformity of the fibre standard .....	66
Figure C.1 – Splice simulator and idealized OTDR signature.....	68
Figure C.2 – Determination of the reference loss $A_{ref}$ .....	70
Figure E.1 – Reflectance standard description and trace.....	75
Figure E.2 – Calibration set up and reference points for calibration .....	78
Figure F.1 – Reflectance standard description and trace.....	81
Figure F.2 – Calibration set up and reference points for calibration .....	83
Figure G.1 – OTDR signals used for determining reflectance .....	86
Figure G.2 – Set-up for measurement of the backscatter coefficient .....	88

Table 1 – Attenuation coefficients defining region A..... 35

**iTeh Standards**  
**(<https://standards.iteh.ai>)**  
**Document Preview**

[IEC 61746-1:2009](#)

<https://standards.iteh.ai/catalog/standards/iec/11230247-5ba0-4f83-862b-0495d0a9d096/iec-61746-1-2009>

## INTERNATIONAL ELECTROTECHNICAL COMMISSION

**CALIBRATION OF OPTICAL TIME-DOMAIN  
REFLECTOMETERS (OTDR) –****Part 1: OTDR for single mode fibres**

## FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61746-1 has been prepared by IEC technical committee 86: Fibre optics.

This first edition of IEC 61746-1 cancels and replaces the second edition of IEC 61746, published in 2005. It constitutes a technical revision.

The main technical changes are the adaptation of Clause 4, the suppression of Clause 10, the improvement and the addition of some definitions, the change of some calculations and the change of graphical symbology to IEC/TR 61930.



The text of this standard is based on the following documents:

FDIS	Report on voting
86/347/FDIS	86/362/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this publication will remain unchanged until the maintenance result date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this standard may be issued at a later date.

**iTeh Standards**  
**(<https://standards.iteh.ai>)**  
**Document Preview**

[IEC 61746-1:2009](#)

<https://standards.iteh.ai/catalog/standards/iec/11230247-5ba0-4f83-862b-0495d0a9d096/iec-61746-1-2009>

## INTRODUCTION

In order for an Optical time-domain reflectometer (OTDR) to qualify as a candidate for complete calibration using this standard, it must be equipped with the following minimum feature set:

- a) a programmable index of refraction, or equivalent parameter;
- b) the ability to present a display of a trace representation, with a logarithmic power scale and a linear distance scale;
- c) two markers/cursors, which display the loss and distance between any two points on a trace display;
- d) the ability to measure absolute distance (location) from the OTDR's zero-distance reference;
- e) the ability to measure the displayed power level relative to a reference level (for example, the clipping level);
- f) the ability to evaluate the reflectance of a reflective event.

**iTeh Standards**  
**(<https://standards.iteh.ai>)**  
**Document Preview**

[IEC 61746-1:2009](https://standards.iteh.ai/catalog/standards/iec/11230247-5ba0-4f83-862b-0495d0a9d096/iec-61746-1-2009)

<https://standards.iteh.ai/catalog/standards/iec/11230247-5ba0-4f83-862b-0495d0a9d096/iec-61746-1-2009>

# CALIBRATION OF OPTICAL TIME-DOMAIN REFLECTOMETERS (OTDR) –

## Part 1: OTDR for single mode fibres

### 1 Scope

This part of IEC 61746 provides procedures for calibrating single-mode optical time domain reflectometers (OTDR). It only covers OTDR measurement errors and uncertainties.

This standard does not cover correction of the OTDR response.

### 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60793-1-40, *Optical fibres – Part 1-40: Measurement methods and test procedures – Attenuation*

IEC 60793-2-50, *Optical fibres – Part 2-50: Product specifications – Sectional specification for class B single-mode fibres*

ISO/IEC 17025, *General requirements for the competence of testing and calibration laboratories*

ITU-T Recommendation G.650.1:2002, *Definitions and test methods for linear, deterministic attributes of single-mode fibre and cable*

ITU-T Recommendation G.650.2:2002, *Definitions and test methods for statistical and non-linear attributes of single-mode fibre and cable*

### 3 Terms, definitions and symbols

For the purposes of this document, the following terms, definitions and symbols apply.

NOTE For more precise definitions, the references to IEC 60050-731 should be consulted.

#### 3.1 attenuation loss

$A$   
optical power decrease in decibels (dB)

NOTE If  $P_{\text{in}}$  (watts) is the power entering one end of a segment of fibre and  $P_{\text{out}}$  (watts) is the power leaving the other end, then the attenuation of the segment is

$$A = 10 \log_{10} \left( \frac{P_{\text{in}}}{P_{\text{out}}} \right) \quad \text{dB} \quad (1)$$

[IEV 731-01-48, modified]

**3.2  
attenuation coefficient**

$\alpha$


attenuation (3.1) of a fibre per unit length

[IEV 731-03-42, modified]

**3.3  
attenuation dead zone**

for a reflective or attenuating event, the region after the event where the displayed trace deviates from the undisturbed backscatter trace by more than a given vertical distance  $\Delta F$

NOTE The attenuation dead zone (see Figure 1 below) will depend on the following event parameters: reflectance, loss, displayed power level and location. It may also depend on any fibre optic component in front of the event.

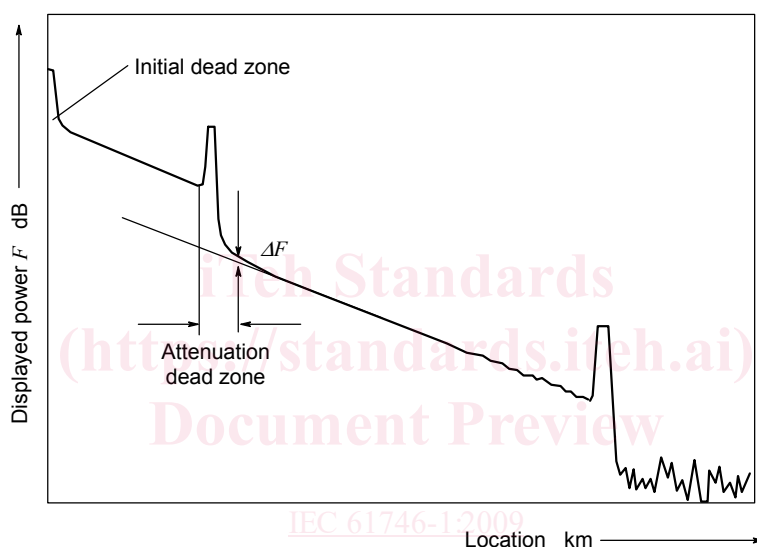

**Figure 1 – Definition of attenuation dead zone**

**3.4  
backscatter parameter**

$K$

at a given point along the fibre, the backscattered propagating power per unit incident energy

NOTE 1  $K$  is given by the following formula:

$$K = S\alpha_s \frac{V}{2} \text{ s}^{-1} \tag{2}$$

where

$\alpha_s$  is the scattering coefficient, e.g.; in  $\text{m}^{-1}$ ;

$S$  is the backscatter capture fraction. It depends on other standard fibre parameters such as the mode field diameter in single mode fibre;

$V$  is the group velocity (in  $\text{m/s}$ );

$= c / N$  where  $c$  is the speed of the light in vacuum,  $N$  the group index of the fibre.

NOTE 2 See also Annex G.

### 3.5 backscatter coefficient

 $C$ 

for a given pulse, the ratio of backscattered power at the input side of the fibre to the pulse input power

NOTE 1 It represents the backscatter parameter for a given pulse width. The backscatter coefficient is defined from the backscatter parameter (3.4) using the following formula:

$$C(\Delta T) = K\Delta T \quad (3)$$

where  $\Delta T$  is the pulse width, e.g. in seconds.

Usually the backscatter coefficient is expressed in dB for a given pulse width,  $\Delta T$ .

$$C_{\text{dB}}(\Delta T) = 10 \log_{10}(K\Delta T) \quad (4)$$

NOTE 2 The pulse width,  $\Delta T$  in the previous formula is used to normalise  $C(\Delta T)$ . Usual values for  $\Delta T$  are 1 ns and 1  $\mu$ s. See also Annex G.

### 3.6 calibration

set of operations which establish, under specified conditions, the relationship between the values indicated by the measuring instrument and the corresponding known values of that quantity

NOTE See ISO/IEC Guide 99 [11] in the bibliography.

### 3.7 centroidal wavelength

 $\lambda_{\text{avg}}$ 

power-weighted mean wavelength of a light source in vacuum

[IEC 61280-1-3, definition 2.1.4]

[IEC 61746-1:2009](https://standards.iteh.ai/catalog/standards/iec/11230247-5ba0-4f83-862b-0495d0a9d096/iec-61746-1-2009)

<https://standards.iteh.ai/catalog/standards/iec/11230247-5ba0-4f83-862b-0495d0a9d096/iec-61746-1-2009>

### 3.8 displayed power level

 $F$ 

level displayed on the OTDR's power scale

NOTE 1 Unless otherwise specified,  $F$  is defined in relation to the clipping level (see Figure 8).

NOTE 2 Usually, the OTDR scale displays five times the logarithm of the received power, plus a constant offset.

### 3.9 distance

 $D$ 

spacing between two features

NOTE Usually expressed in metres.

### 3.10 distance sampling error

 $\Delta L_{\text{sample}}$ 

maximum distance (3.9) error attributable to the distance between successive sample points

NOTE 1 Usually expressed in metres.

NOTE 2 The distance sampling error is repetitive in nature; therefore, one way of quantifying this error is by its amplitude.

**3.11**  
**distance scale deviation**

$\Delta S_L$

difference between the average displayed distance (3.9)  $\langle D_{\text{otdr}} \rangle$  and the correspondent reference distance (3.27)  $D_{\text{ref}}$  divided by the reference distance (3.27)

NOTE 1 Usually expressed in m/m

NOTE 2  $\Delta S_L$  is given by the following formula:

$$\Delta S_L = \frac{\langle D_{\text{otdr}} \rangle - D_{\text{ref}}}{D_{\text{ref}}} = \frac{\langle D_{\text{otdr}} \rangle}{D_{\text{ref}}} - 1 \quad (5)$$

where  $\langle D_{\text{otdr}} \rangle$  is the displayed distance on a fibre averaged over at least one sample spacing.

**3.12**  
**distance scale factor**

$S_L$

average displayed distance (3.9) distance divided by the correspondent reference distance (3.27)

NOTE  $S_L$  is given by the following formula:

$$S_L = \frac{\langle D_{\text{otdr}} \rangle}{D_{\text{ref}}} \quad (6)$$

where  $\langle D_{\text{otdr}} \rangle$  is the displayed distance between two features on a fibre averaged over at least one sample spacing.

**3.13**  
**distance scale uncertainty**

$u_{\Delta S_L}$

uncertainty of the distance scale deviation (3.11)

NOTE 1 Usually expressed in m/m.

NOTE 2  $u_{\Delta S_L}$  is given by the following formula:

$$u_{\Delta S_L} = u \left( \frac{\langle D_{\text{otdr}} \rangle}{D_{\text{ref}}} - 1 \right) = u \left( \frac{\langle D_{\text{otdr}} \rangle}{D_{\text{ref}}} \right) \quad (7)$$

NOTE 3 In the above formula,  $u()$  is understood as the standard uncertainty of  $()$ .

**3.14**  
**dynamic range at 98 % (one-way)**

amount of fibre attenuation (3.1) that causes the backscatter signal to equal the noise level at 98 % (3.24)

NOTE It can be represented by the difference between the extrapolated point of the backscattered trace (taken at the intercept with the power axis) and the noise level expressed in decibels, using a standard category B fibre (see IEC 60793-2-50).

**3.15**  
**group index**

$N$

factor by which the speed of light in vacuum has to be divided to yield the propagation velocity of light pulses in the fibre