

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Battery charging interface for small handheld multimedia devices –
Part 2: 2 mm barrel type interface conformance testing**

**Interface de charge de batterie pour petits appareils multimédia portables –
Partie 2: Essai de conformité de l'interface de type cylindrique 2 mm**

ITeH STANDARD PREVIEW
(standards.iteh.ai)
IEC 62637-2:2011
<https://standards.iteh.ai/catalog/standards/sist/5aa74b57-6b9a-46c0-ba05-a831e002df24/iec-62637-2-2011>



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2011 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.

Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland
Email: inmail@iec.ch
Web: www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: www.iec.ch/online_news/justpub

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

justpub@iec.ch

- Electropedia: www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: www.iec.ch/webstore/custserv

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch

Tel.: +41 22 919 02 11

Fax: +41 22 919 03 00

A propos de la CEI

La Commission Electrotechnique Internationale (CEI) est la première organisation mondiale qui élabore et publie des normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications CEI

Le contenu technique des publications de la CEI est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

- Catalogue des publications de la CEI: www.iec.ch/searchpub/cur_fut-f.htm

Le Catalogue en-ligne de la CEI vous permet d'effectuer des recherches en utilisant différents critères (numéro de référence, texte, comité d'études,...). Il donne aussi des informations sur les projets et les publications retirées ou remplacées.

- Just Published CEI: www.iec.ch/online_news/justpub

Restez informé sur les nouvelles publications de la CEI. Just Published détaille deux fois par mois les nouvelles publications parues. Disponible en-ligne et aussi par email.

- Electropedia: www.electropedia.org

Le premier dictionnaire en ligne au monde de termes électroniques et électriques. Il contient plus de 20 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans les langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International en ligne.

- Service Clients: www.iec.ch/webstore/custserv/custserv_entry-f.htm

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions, visitez le FAQ du Service clients ou contactez-nous:

Email: csc@iec.ch

Tél.: +41 22 919 02 11

Fax: +41 22 919 03 00



IEC 62637-2

Edition 1.0 2011-03

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Battery charging interface for small handheld multimedia devices –
Part 2: 2 mm barrel type interface conformance testing**

**Interface de charge de batterie pour petits appareils multimédia portables –
Partie 2: Essai de conformité de l'interface de type cylindrique 2 mm**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

PRICE CODE
CODE PRIX

R

ICS 33.160.99; 97.180

ISBN 978-2-88912-598-2

CONTENTS

FOREWORD.....	4
1 Scope.....	6
2 Normative references	6
3 Abbreviations and symbols	6
4 Test conditions for the 2 mm barrel charging interface.....	7
4.1 General test conditions.....	7
4.2 Temperature.....	7
4.3 Voltage.....	7
5 Electrical testing of 2 mm barrel type chargers	7
5.1 Maximum transient voltage and current values	7
5.1.1 Test purpose	7
5.1.2 Requirements	7
5.1.3 Test equipment.....	8
5.1.4 Test method	8
5.2 Maximum output ripple voltage	9
5.2.1 Test purpose	9
5.2.2 Requirements	9
5.2.3 Test equipment.....	10
5.2.4 Test method	10
5.3 High-frequency voltage components at the charger output	11
5.3.1 Test purpose	11
5.3.2 Requirements.....	11
5.3.3 Equipment	11
5.3.4 Test method	11
5.4 Feel current of AC chargers	12
5.4.1 Test purpose	12
5.4.2 Requirements	12
5.4.3 Equipment	12
5.4.4 Test method	12
5.5 Charging voltage / current window.....	13
5.5.1 Test purpose	13
5.5.2 Requirements	13
5.5.3 Equipment	14
5.5.4 Test method	14
5.6 Current linearity for chargers	15
5.6.1 Test purpose	15
5.6.2 Requirements	15
5.6.3 Equipment	15
5.6.4 Test method	16
6 Electrical testing of 2 mm barrel interface accessories	16
6.1 General.....	16
6.2 Charging voltage / current window.....	16
6.2.1 Test purpose	16
6.2.2 Requirements	16
6.2.3 Equipment	16
6.2.4 Test method	16

6.3	Accessory power consumption during device booting	17
6.3.1	Test purpose	17
6.3.2	Requirements	17
6.3.3	Equipment	17
6.3.4	Test method	17
Figure 1 – Maximum duration of charging current overshoot and output voltage undershoot		9
Figure 2 – Maximum peak-to-peak ripple voltage		10
Figure 3 – Maximum high frequency output voltage components		11
Figure 4 – Test set up for high frequency voltage components		12
Figure 5 – Test set up		13
Figure 6 – Charging current/voltage window for 2 mm barrel chargers		14
Figure 7 – Current linearity specification		15
Figure 8 – Maximum current consumption in accessory during boot-up		17
Table 1 – Maximum ripple voltage in different frequency ranges		9
Table 2 – Maximum high-frequency voltage components at the charger output		11

iTeh STANDARD PREVIEW (standards.iteh.ai)

IEC 62637-2:2011

<https://standards.iteh.ai/catalog/standards/sist/5aa9a537-e69a-46e0-9ab3-a831e002df24/iec-62637-2-2011>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**BATTERY CHARGING INTERFACE FOR SMALL HANDHELD
MULTIMEDIA DEVICES –****Part 2: 2 mm barrel type interface conformance testing**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62637-2 has been prepared by technical area 1: Terminals for audio, video and data services and content, of IEC technical committee 100: Audio, video and multimedia systems and equipment.

This bilingual version (2011-07) replaces the English version.

The text of this standard is based on the following documents:

CDV	Report on voting
100/1674/CDV	100/1750/RVC

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

The French version of this standard has not been voted upon.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 62637 series, under the general title *Battery charging interface for small handheld multimedia devices*, can be found on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

iTeh STANDARD PREVIEW (standards.iteh.ai)

IEC 62637-2:2011

<https://standards.iteh.ai/catalog/standards/sist/5aa9a537-e69a-46e0-9ab3-a831e002df24/iec-62637-2-2011>

BATTERY CHARGING INTERFACE FOR SMALL HANDHELD MULTIMEDIA DEVICES –

Part 2: 2 mm barrel type interface conformance testing

1 Scope

This part of the IEC 62637 provides the conformance testing rules and guidelines for equipment built to meet the 2 mm barrel type charging interface specified in the 62637-1.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 62637-1:2011, *Battery charging interface for small handheld multimedia devices – Part 1: 2 mm barrel interface*

3 Abbreviations and symbols

For the purposes of this document, the following abbreviations apply.

AC	Alternating Current
ATT	ATTenuator
C	Capacitance F
CDN	Coupling/Decoupling Network
Crest factor	Current peak value/current RMS value
dB	Decibel
dB(mW)	Power in dB referring to 1 mW
DC	Direct Current
DUT	Device Under Test
EMC	Electromagnetic Compatibility
ESD	ElectroStatic Discharge
ESR	Effective Series Resistance Ω
f	Frequency in Hz
$f_{I\text{char}}$	Charging current change frequency Hz
GND	GrouND
I	Current A
I_{char}	Charging current A
I_{max}	Maximum current A
I_{peak}	Peak current A
L	Inductance H

N	Newton
R	Resistance Ω
RBW	Resolution BandWidth
RMS	Root mean square
V	Voltage V
V_{char}	Charging voltage
$V_{\text{max-out}}$	Maximum output voltage
V_{out}	Output voltage
V_{ripple}	Ripple voltage
VBW	Video BandWidth
SWP	SWeeP time

4 Test conditions for the 2 mm barrel charging interface

4.1 General test conditions

The general test conditions are set out below. Manufacturers should note that the actual conditions of use could be more stringent.

Tests conducted using this conformance document do not replace EMC, ESD, safety, type approval, or any tests set by legislation in the chargers or devices using the charging interface specified in IEC 62637-1. The purpose of the conformance testing is to achieve good interoperability between different chargers and devices.

4.2 Temperature

All measurements shall be made at normal room temperature 18 °C to 25 °C, unless some other temperature is specified.

4.3 Voltage

All tests are performed under nominal operating voltage as defined by the manufacturer.

5 Electrical testing of 2 mm barrel type chargers

5.1 Maximum transient voltage and current values

5.1.1 Test purpose

The purpose of this test is to verify that the charger complies with the requirements of settling time, minimum voltage and maximum voltage limits specified in IEC 62637-1, 5.2.

5.1.2 Requirements

The following requirements apply.

- Maximum charger output overshoot shall be less than or equal to 16 V.
- Maximum reverse voltage at charger output shall be less than or equal to 1 V.
- Maximum time to achieve steady state value for voltage and current ($\pm 10\%$ tolerance) after load change ("no load"/"normal load") shall be less than or equal to 10 ms.
- Maximum duration of charging current overshoot peak value greater than 1,1 A shall be less than or equal to 5 ms.

- Maximum output voltage undershoot with a load current less or equal than 100 mA shall be 4,1 V.

Maximum duration of charging current overshoot is shown in Figure 1.

5.1.3 Test equipment

The following equipment is required to perform the test:

- oscilloscope;
- 6 k Ω load as “no load”;
- a suitable resistor to draw a 100 mA load current at the nominal output voltage;
- 3,0 V current sink type of load with 1,1 A current limit as “normal load”;
- AC power source (if charger is AC powered);
- DC power source (if charger is made for car environment).

5.1.4 Test method

Proceed as follows.

- Set the oscilloscope to measure voltage and current from the charger output.
- Set the output of AC or DC power source to nominal value.
- Measure the voltage and current values when the 6 k Ω load and 3,0 V load (a load, which results 3,0 V charging voltage) are interchanged with a fast electronic switch (switching time less than 100 μ s) at the charger output.
- Measure the voltage undershoot when in 100 mA resistive load (a load, which draws 100 mA at nominal output voltage). [IEC 62637-2:2011](https://standards.iteh.ai/catalog/standards/sist/5aa9a537-e69a-46e0-9ab3-a851c002d24/iec-62637-2-2011)

Repeat the test using minimum and maximum supply voltages specified to the charger (recommendation for AC powered chargers is nominal voltage ± 20 %).

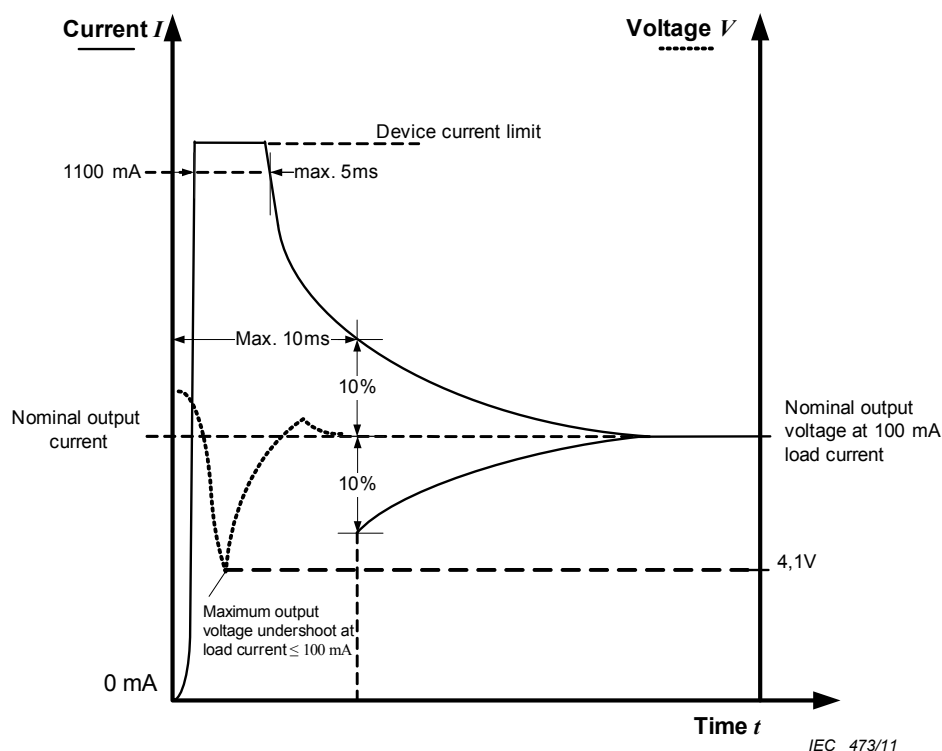


Figure 1 – Maximum duration of charging current overshoot and output voltage undershoot

5.2 Maximum output ripple voltage IEC 62637-2:2011

5.2.1 Test purpose

The purpose of this test is to verify that the charger complies with the requirements of the ripple voltage specified in 5.3 of IEC 62637-1.

5.2.2 Requirements

Maximum ripple voltages for different frequency ranges are given in Table 1.

Table 1 – Maximum ripple voltage in different frequency ranges

Frequency range	Maximum ripple voltage (peak-to-peak)
$f < 20$ Hz	200 mV
$20 \text{ Hz} \leq f < 200$ Hz	200 mV
$200 \text{ Hz} \leq f < 20$ kHz	200 mV
$20 \text{ kHz} \leq f < 1$ MHz	400 mV

The maximum allowed output ripple voltage with maximum output current in constant current mode is 300 mV RMS for output voltages V_{out} between 2,5 V and 5,5 V.

A sum of ripple voltages over the full frequency range 0 MHz to 1 MHz is 800 mV (peak-to-peak).

During the test all the measured V and I values shall be within the voltage / current window of the charger interface.

Maximum peak-to-peak ripple voltage is shown in Figure 2.

5.2.3 Test equipment

The following equipment is required to perform the test:

- oscilloscope which offers the possibility of selecting a measured frequency band;
- variable resistive load 0 k Ω to 6 k Ω . Maximum stray capacitance of ripple test load (e.g. on-line testing) is 2 μ F;
- AC power source (if charger is AC powered);
- DC power source (if charger is designed for car environment).

5.2.4 Test method

Proceed as follows.

- Set the output of AC or DC power source to nominal value. Connect charger to power supply and to variable load.
- Set the oscilloscope to measure voltage from charger's output. Connect charger to variable load and set the load as 6 k Ω .
- Set the oscilloscope to measure ripple voltage peak-to-peak value from frequency band 0 Hz to 20 Hz. Reduce resistance slowly until the output voltage is 1,5 V. Find the highest peak-to-peak value between maximum voltage and 1,5 V.
- Set the oscilloscope to measure ripple voltage peak-to-peak value from frequency band 20 Hz to 200 Hz. Reduce resistance slowly until the output voltage is 1,5 V. Find the highest peak-to-peak value between maximum voltage and 1,5 V.
- Set the oscilloscope to measure ripple voltage peak-to-peak value from frequency band 200 Hz to 20 kHz. Reduce resistance slowly until the output voltage is 1,5 V. Find the highest peak-to-peak value between maximum voltage and 1,5 V.
- Set the oscilloscope to measure ripple voltage peak-to-peak value from frequency band 20 kHz to 1 MHz. Reduce resistance slowly until the output voltage is 1,5 V. Find the highest peak-to-peak value between maximum voltage and 1,5 V.
- Set the variable resistance so that the output voltage is 5,5 V. Remove frequency band limitations from the oscilloscope. Set the oscilloscope to measure the root mean square (RMS) value of ripple voltage. Decrease resistance slowly so that the output voltage is 2,5 V. Find the largest RMS value between 5,5 V and 2,5 V.

Repeat tests c) to g) using minimum and maximum supply voltages specified for charger (recommendation for AC-powered chargers is the nominal voltage \pm 20 %). Repeat tests in minimum and maximum temperatures specified for charger.

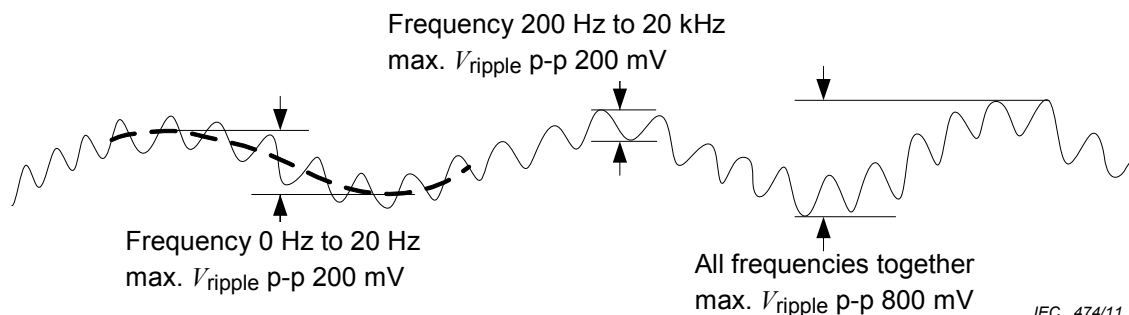


Figure 2 – Maximum peak-to-peak ripple voltage

5.3 High-frequency voltage components at the charger output

5.3.1 Test purpose

The purpose of this test is to verify that the charger complies with the requirements for high-frequency voltage components at the charger output specified in IEC 62637-1, 5.4.

5.3.2 Requirements

The charger shall not cause more high frequency voltage components at the charger output than specified in Table 2 and Figure 3 when connected to an artificial load specified in Annex A of IEC 62637-1 and measured with a coupling/decoupling network as specified in Annex B of IEC 62637-1.

Table 2 – Maximum high-frequency voltage components at the charger output

Frequency range MHz	Maximum high frequency voltage components dB(mW)
1 to 80	–40 to –65 linear slope
80 to 150	–65

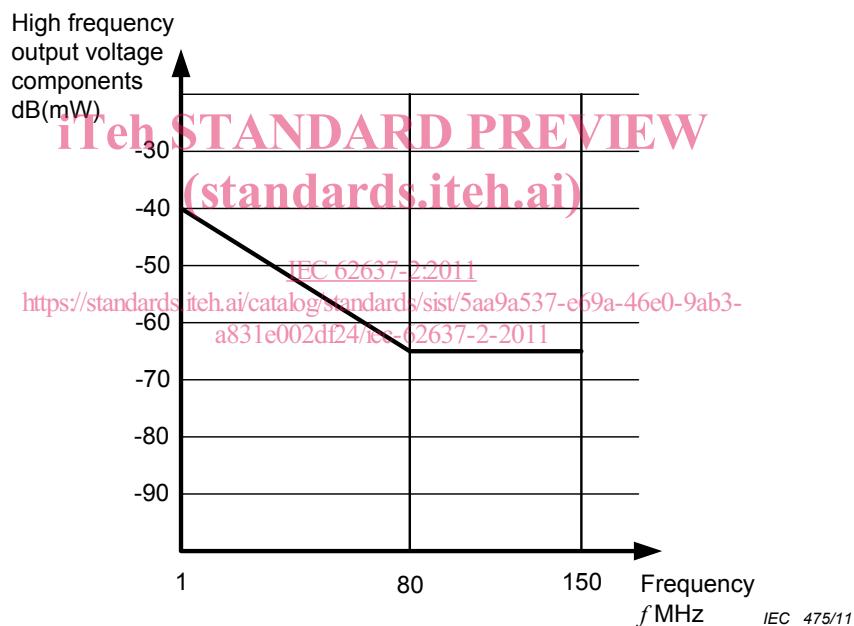


Figure 3 – Maximum high frequency output voltage components

5.3.3 Equipment

The following equipment is required to perform the test:

- shielded room to avoid any external interference;
- spectrum analyzer;
- coupling/decoupling network (CDN) specified in Annex B of IEC 62637-1;
- artificial load working as standard device charging interface. The artificial load is specified in Annex A of IEC 62637-1.

5.3.4 Test method

The test set up is shown in Figure 4.