

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Fibre optic active components and devices – Package and interface standards –
Part 2: SFF 10-pin transceivers**

(standards.iteh.ai)

**Composants et dispositifs actifs en fibres optiques – Normes de boîtier et
d'interface –**

Partie 2: Emetteurs-récepteurs SFF à 10 broches



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2010 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester.

If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de la CEI ou du Comité national de la CEI du pays du demandeur.

Si vous avez des questions sur le copyright de la CEI ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de la CEI de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland
Email: inmail@iec.ch
Web: www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

- Catalogue of IEC publications: www.iec.ch/searchpub

The IEC on-line Catalogue enables you to search by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, withdrawn and replaced publications.

- IEC Just Published: www.iec.ch/online_news/justpub

Stay up to date on all new IEC publications. Just Published details twice a month all new publications released. Available on-line and also by email.

- Electropedia: www.electropedia.org

The world's leading online dictionary of electronic and electrical terms containing more than 20 000 terms and definitions in English and French, with equivalent terms in additional languages. Also known as the International Electrotechnical Vocabulary online.

- Customer Service Centre: www.iec.ch/webstore/custserv

If you wish to give us your feedback on this publication or need further assistance, please visit the Customer Service Centre FAQ or contact us:

Email: csc@iec.ch

Tel.: +41 22 919 02 11

Fax: +41 22 919 03 00

A propos de la CEI

La Commission Electrotechnique Internationale (CEI) est la première organisation mondiale qui élabore et publie des normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications CEI

Le contenu technique des publications de la CEI est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

- Catalogue des publications de la CEI: www.iec.ch/searchpub/cur_fut-f.htm

Le Catalogue en-ligne de la CEI vous permet d'effectuer des recherches en utilisant différents critères (numéro de référence, texte, comité d'études,...). Il donne aussi des informations sur les projets et les publications retirées ou remplacées.

- Just Published CEI: www.iec.ch/online_news/justpub

Restez informé sur les nouvelles publications de la CEI. Just Published détaille deux fois par mois les nouvelles publications parues. Disponible en-ligne et aussi par email.

- Electropedia: www.electropedia.org

Le premier dictionnaire en ligne au monde de termes électroniques et électriques. Il contient plus de 20 000 termes et définitions en anglais et en français, ainsi que les termes équivalents dans les langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International en ligne.

- Service Clients: www.iec.ch/webstore/custserv/custserv_entry-f.htm

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions, visitez le FAQ du Service clients ou contactez-nous:

Email: csc@iec.ch

Tél.: +41 22 919 02 11

Fax: +41 22 919 03 00

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Fibre optic active components and devices – Package and interface standards –
Part 2: SFF 10-pin transceivers**

**Composants et dispositifs actifs en fibres optiques – Normes de boîtier et
d'interface –
Partie 2: Emetteurs-récepteurs SFF à 10 broches**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

PRICE CODE
CODE PRIX

P

ICS 33.180.01

ISBN 978-2-88912-297-4

CONTENTS

FOREWORD.....	3
INTRODUCTION	5
1 Scope.....	6
2 Normative references.....	6
3 Terms, definitions and abbreviations.....	6
3.1 Terms and definitions	6
3.2 Abbreviations.....	6
4 Classification	6
5 Specification of the optical connector interface	7
6 Electrical interface.....	7
6.1 General.....	7
6.2 Numbering of electrical terminals.....	7
6.3 Electrical terminal assignment	7
7 Outline and footprint	8
7.1 Drawings of case outline.....	8
7.2 Optical receptacle	14
7.3 Drawings of case footprint.....	15
Figure 1 – Electrical terminal numbering assignments (viewed from above with pins underneath).....	7
Figure 2 – Case outline of the SFF MT-RJ 10-pin transceiver.....	9
Figure 3 – Case outline of the SFF LC 10-pin transceiver.....	11
Figure 4 – Case outline of the SFF MU duplex 10-pin transceiver.....	13
Figure 5 – Case footprint.....	15
Table 1 – Transceiver receiver pin-function definitions	7
Table 2 – Transceiver transmitter pin-function definitions	8
Table 3 – Key to Figure 2	10
Table 4 – Key to Figure 3	12
Table 5 – Key to Figure 4	14
Table 6 – Key to Figure 5	16

iTeh STANDARD PREVIEW

(standards.iteh.ai)

IEC 62148-2:2010

https://standards.iteh.ai/catalog/standards/sist/4530ff419-497c-9cc4-

77d0e0aba1c7iec-62148-2-2010

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**FIBRE OPTIC ACTIVE COMPONENTS AND DEVICES –
PACKAGE AND INTERFACE STANDARDS –****Part 2: SFF 10-pin transceivers**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62148-2 has been prepared by subcommittee 86C: Fibre optic systems and active devices, of IEC technical committee 86: Fibre optics.

This standard should be read in conjunction with IEC 62148-1.

This second edition cancels and replaces the first edition published in 2003. It constitutes a technical revision.

With respect to the previous edition, this edition includes 10-pin SFF-LC, and SFF MU devices.

It also cancels and replaces the first edition of IEC 62148-7 and the first edition of IEC 62148-9.

The text of this standard is based on the following documents:

FDIS	Report on voting
86C/975/FDIS	86C/981/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 62148 series can be found, under the general title *Fibre optic active components and devices – Package and interface standards*, on the IEC website.

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "http://webstore.iec.ch" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[IEC 62148-2:2010](#)

<https://standards.iteh.ai/catalog/standards/sist/d64530ff-41f9-497c-9cc4-77d0e0aba1cf/iec-62148-2-2010>

INTRODUCTION

Fibre optic transceivers are used to convert electrical signals into optical signals and vice versa. This standard covers the physical interface for a 10-pin small form factor (SFF) transceiver. This transceiver is designed for use with the SFF MU/MT-RJ/LC duplex optical connector and with through-hole printed circuit-board applications.

iTeh STANDARD PREVIEW **(standards.iteh.ai)**

[IEC 62148-2:2010](https://standards.iteh.ai/catalog/standards/sist/d64530ff-41f9-497c-9cc4-77d0e0aba1cf/iec-62148-2-2010)

<https://standards.iteh.ai/catalog/standards/sist/d64530ff-41f9-497c-9cc4-77d0e0aba1cf/iec-62148-2-2010>

FIBRE OPTIC ACTIVE COMPONENTS AND DEVICES – PACKAGE AND INTERFACE STANDARDS –

Part 2: SFF 10-pin transceivers

1 Scope

This part of IEC 62148 covers the physical interface specifications for the SFF MT-RJ/LC/MU duplex 10-pin fibre optic transceiver module family.

The intent of this standard is to adequately specify the physical requirements of an optical transceiver that will enable mechanical interchangeability of transceivers complying with this standard both at the printed circuit wiring board and for any panel-mounting requirement.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61754-6, *Fibre optic connector interfaces – Part 6: Type MU connector family*

IEC 61754-18, *Fibre optic connector interfaces – Part 18: Type MT-RJ connector family*

IEC 61754-20, *Fibre optic connector interfaces – Part 20: Type LC connector family*

IEC 62148-1, *Fibre optic active components and devices – Package and interface standards – Part 1: General and guidance*

3 Terms, definitions and abbreviations

For the purposes of this document, the following terms, definitions and abbreviations apply.

3.1 Terms and definitions

3.1.1

small form factor optical transceiver

a compact optical digital signal transceiver whose package has the same cross sectional outline as the receptacle of an electrical connector compliant with the IEC 60603-7 series

3.2 Abbreviations

SFF small form factor

4 Classification

The transceiver described in this standard is classified as type 1 according to IEC 62148-1.

5 Specification of the optical connector interface

This standard applies to the MT-RJ/LC/MU duplex optical connector interface. Detailed dimensions of the optical receptacle are provided in Clause 7.

Assignment of the optical transmit and receive ports is aligned to the electrical pins. One-half of the module is the transmit side and the other is the receive side. Assignments are shown in Figure 1.


6 Electrical interface

6.1 General

The electrical interface in this standard defines only the basic functionality of each pin.

6.2 Numbering of electrical terminals

Pin numbering assignments are shown in Figure 1 (viewed from the top of the module with pins underneath).

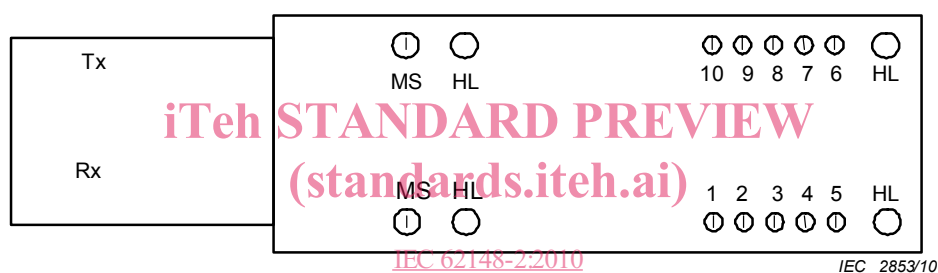

Key

Rx: receiver section

Tx: transmitter section

**Figure 1 – Electrical terminal numbering assignments
(viewed from above with pins underneath)**

6.3 Electrical terminal assignment

Table 1 – Transceiver receiver pin-function definitions

10-pin part	Symbol	Functional description
MS ^a	MS	Mounting studs The mounting studs are provided for transceiver mechanical attachment to the circuit board. They may also provide an optional connection of the transceiver to the equipment chassis ground
HL	HL	Housing leads The optional transceiver housing leads may be provided for additional signal grounding. These additional grounds may improve signal integrity, EMC or EMI performance
1	Vee _r	Receiver signal ground
2	Vcc _r	Receiver power supply
3	SD	Signal detect
4	RD-	Received data out bar
5	RD+	Received data out

^a The holes in the circuit board shall be tied to the chassis ground.

Table 2 – Transceiver transmitter pin-function definitions


10-pin part	Symbol	Functional description
MS ^a	MS	Mounting studs The mounting studs are provided for transceiver mechanical attachment to the circuit board. They may also provide an optional connection of the transceiver to the equipment chassis ground
HL	HL	Housing leads The optional transceiver housing leads may be provided for additional signal grounding. These additional grounds may improve signal integrity, EMC or EMI performance
6	Vcc _t	Transmitter power supply
7	Vee _t	Transmitter signal ground
8 ^b	TDis	Transmitter disable: optional feature
9	TD+	Transmitter data in
10	TD-	Transmitter data in bar
^a The holes in the circuit board shall be tied to the chassis ground. ^b Optional use for laser-based products only.		

7 Outline and footprint

7.1 Drawings of case outline

Drawings of the case outline as well as the dimensions are given in Figures 2, 3 and 4.

<https://standards.iteh.ai/catalog/standards/sist/d64530ff-41f9-497c-9cc4-77d0e0aba1cf/iec-62148-2-2010>
 IEC 62148-2:2010
 (standards.iteh.ai)

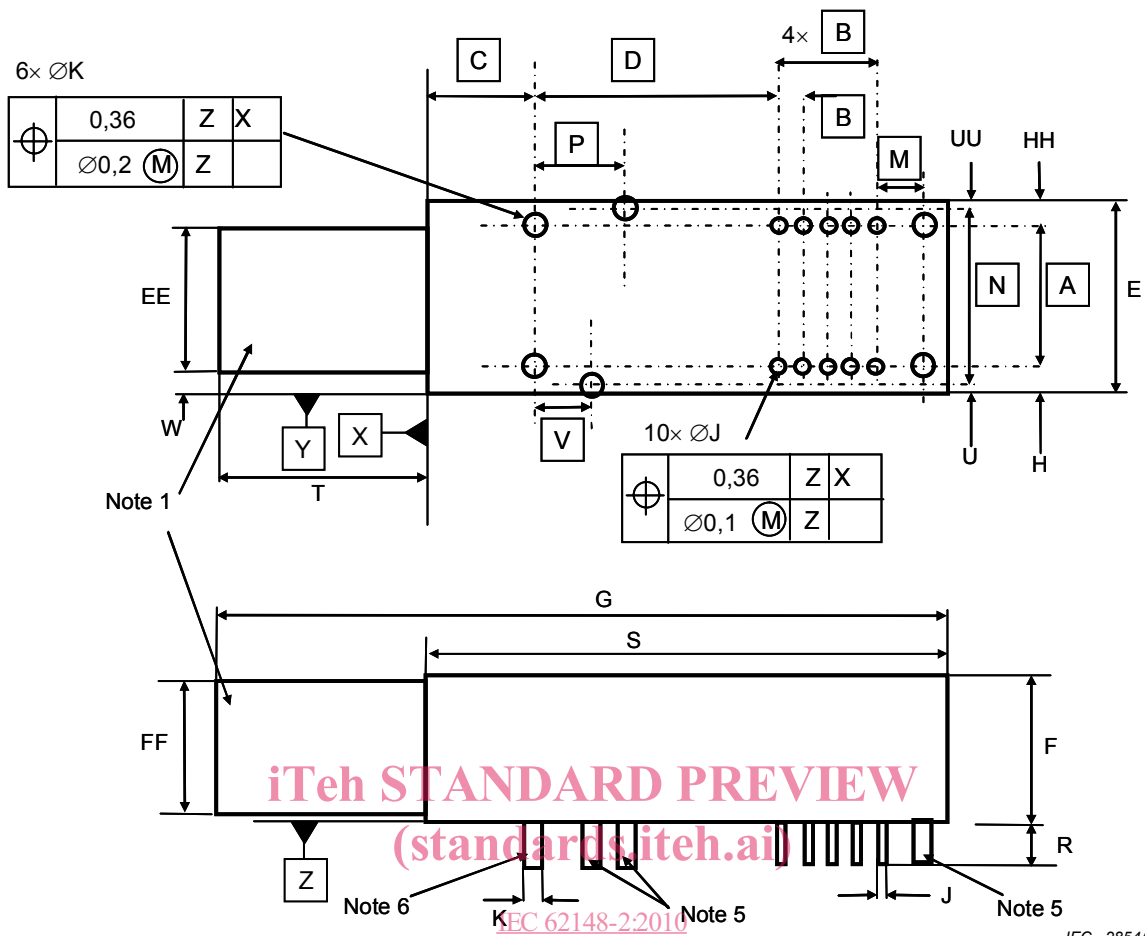

<https://standards.iteh.ai/catalog/standards/sist/d64530ff-41f9-497c-9cc4-77d0e0aba1cf/iec-62148-2-2010>

IEC 2854/10

Figure 2 – Case outline of the SFF MT-RJ 10-pin transceiver

Table 3 – Key to Figure 2

Reference	Dimensions mm		Remarks
	Minimum	Maximum	
A	10,16		Basic dimension
B	1,78		Basic dimension
C	7,59		Basic dimension
D	17,78		Basic dimension
E		13,59	
F		9,80	
G		49,56	Reference dimension
H		1,90	See Note 7
J	0,41	0,61	Diameter in case of rod pins (See Note 3)
K	0,97	1,07	Diameter in case of rod pins (See Note 4)
M	3,56		Basic dimension
N	13,34		Basic dimension
P	7,11		Basic dimension
R	2,92		
S		37,56	
T		12,00	
U		0,30	See Note 8
V	4,57		Basic dimension
W	1,70	2,30	
EE		9,60	
FF		9,30	
HH		1,90	See Note 7
UU		0,30	See Note 8

NOTE 1 Defines the space available for the MT-RJ optical receptacle.

NOTE 2 All 16 pins and posts are to be treated as a single pattern.

NOTE 3 Quadratic prism whose cross section is less than the quadrangle inscribed in the circle which diameter is "J".

NOTE 4 Quadratic prism whose cross section is less than the quadrangle inscribed in the circle which diameter is "K".

NOTE 5 Four housing leads are additional signal grounds to enhance the tolerance of Electromagnetic immunity and Electromagnetic compatibility.

NOTE 6 Two mounting studs are recommended to be tied to the chassis ground.

NOTE 7 H+HH is less than 3,63.

NOTE 8 U+UU is less than 0,45.