

INTERNATIONAL STANDARD

NORME INTERNATIONALE

Fibre optic interconnecting devices and passive components – Basic test and measurement procedures –

Part 3-14: Examinations and measurements – Error and repeatability of the attenuation settings of a variable optical attenuator

<https://standards.iteh.ai/catalog/standards/sist/4a07264c-415a-4319-864c->

Dispositifs d'interconnexion et composants fibroniques – Procédures fondamentales d'essais et de mesures –

Partie 3-14: Examens et mesures – Erreur et répétabilité des positions d'affaiblissement d'un affaiblisseur optique variable



THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2014 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22,000 terminological entries in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

67,000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC -

webstore.iec.ch/advsearchform

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études,...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

Electropedia - www.electropedia.org

Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 000 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 16 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

Glossaire IEC - std.iec.ch/glossary

67 000 entrées terminologiques électrotechniques, en anglais et en français, extraites des articles Termes et Définitions des publications IEC parues depuis 2002. Plus certaines entrées antérieures extraites des publications des CE 37, 77, 86 et CISPR de l'IEC.

INTERNATIONAL STANDARD

NORME INTERNATIONALE

**Fibre optic interconnecting devices and passive components – Basic test and measurement procedures –
Part 3-14: Examinations and measurements – Error and repeatability of the attenuation settings of a variable optical attenuator**

<https://standards.iteh.ai/catalog/standards/sist/4a07264c-415a-4319-864c-73251c0901e6/iec-61300-3-14-2014>

**Dispositifs d'interconnexion et composants fibroniques – Procédures fondamentales d'essais et de mesures –
Partie 3-14: Examens et mesures – Erreur et répétabilité des positions d'affaiblissement d'un affaiblisseur optique variable**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 33.180.20

ISBN 978-2-8322-7386-9

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

CONTENTS

FOREWORD	3
1 Scope	5
2 Normative references	5
3 General description	5
4 Apparatus	7
4.1 Light source (S) and launch conditions	7
4.2 Detector (D)	7
4.3 Reference fibre (RF)	7
4.4 Temporary joint (TJ)	7
5 Measurement procedure	8
5.1 Measurement set-up	8
5.2 Measurement procedure	8
6 Calculation	8
6.1 Attenuation error for VOAs with absolute calibration	8
6.2 Attenuation error for VOAs with relative calibration	9
6.3 Maximum deviation of attenuation from setting for all attenuation levels	9
6.4 Repeatability of attenuation	9
7 Measurement report	9
8 Details to be specified	10
8.1 General	10
8.2 Light source and launch condition	10
8.3 Detector	10
8.4 Reference fibre	10
8.5 Temporary joint	10
8.6 DUT	10
8.7 Measurement procedure	10
8.8 Measurement uncertainty	10
8.9 Others	10
Annex A (informative) Example of a sample measurement record	11
Annex B (informative) Measurement method of hysteresis characteristics	12
B.1 General	12
B.2 Measurement procedure	12
B.3 Calculation	12
Figure 1 – Measured versus nominal attenuation	6
Figure 2 – Measurement set-up	8
Table A.1 – Device performance specifications versus actual performance	11

INTERNATIONAL ELECTROTECHNICAL COMMISSION

**FIBRE OPTIC INTERCONNECTING
DEVICES AND PASSIVE COMPONENTS –
BASIC TEST AND MEASUREMENT PROCEDURES –****Part 3-14: Examinations and measurements –
Error and repeatability of the attenuation settings
of a variable optical attenuator**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61300-3-14 has been prepared by subcommittee 86B: Fibre optic interconnecting devices and passive components, of IEC technical committee 86: Fibre optics.

This bilingual version (2019-09) corresponds to the monolingual English version, published in 2014-10.

This third edition cancels and replaces the second edition published in 2006 and constitutes a technical revision

This edition includes the following significant technical changes with respect to the previous edition:

- a) title modification replacing the word "accuracy" by "error";

- b) inclusion of the distinction of manually and electrically controlled variable optical attenuators in the Scope;
- c) revision of clauses for apparatus and details to be specified to harmonize with other standards in the IEC 61300 series;
- d) addition of “the maximum deviation of attenuation from setting” to the clause for calculation;
- e) addition of “measurement method of hysteresis characteristics” in Annex B.

The text of this standard is based on the following documents:

FDIS	Report on voting
86B/3816/FDIS	86B/3843/RVD

Full information on the voting for the approval of this standard can be found in the report on voting indicated in the above table.

The French version of this standard has not been voted upon.

This publication has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 61300 series, published under the general title, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures* can be found on the IEC website.

iTeh STANDARD PREVIEW

The committee has decided that the contents of this publication will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

[IEC 61300-3-14:2014](#)

- reconfirmed, <https://standards.iteh.ai/catalog/standards/sist/4a07264c-415a-4319-864c-d73951ac3df6/iec-61300-3-14-2014>
- withdrawn,
- replaced by a revised edition, or
- amended.

FIBRE OPTIC INTERCONNECTING DEVICES AND PASSIVE COMPONENTS – BASIC TEST AND MEASUREMENT PROCEDURES –

Part 3-14: Examinations and measurements – Error and repeatability of the attenuation settings of a variable optical attenuator

1 Scope

This part of IEC 61300 provides a method to measure the error and repeatability of the attenuation value settings of a variable optical attenuator (VOA). There are two control technologies for VOAs, manually controlled and electrically controlled. This standard covers both control technologies of VOAs and also covers both single-mode and multimode fibre VOAs.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

(standards.iteh.ai)

IEC 61300-1, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 1: General and guidance*

[https://standards.iteh.ai/catalog/standards/sist/4a07264c-415a-4319-864c-](https://standards.iteh.ai/catalog/standards/sist/4a07264c-415a-4319-864c-d73951ac3df6/iec-61300-3-14-2014)

IEC 61300-3-4, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-4: Examinations and measurements – Attenuation*

3 General description

A variable optical attenuator is adjusted sequentially through a series of nominal attenuation settings prescribed in the relevant specification. For an electrically controlled VOA, the attenuation is set by applying electrical voltage or current to the device.

There are two categories of VOAs:

- those that can be adjusted to nominal attenuation levels;
- those that have no information on the nominal attenuation levels.

Some manually controlled VOAs have a scaled dial to indicate the nominal attenuation levels. Some electrically controlled VOAs have a table (or equation) indicating the applied voltage (or current) corresponding to nominal attenuation levels. This measurement method of attenuation error and repeatability can only be applied to VOAs which can be adjusted to nominal attenuation levels.

In this type of measurement, the attenuation value is measured at each setting. This sequence of measurements is repeated a number of times as prescribed in the relevant specification. The error of the attenuator at each setting is then given by the difference between the mean of the measured values and the nominal value. The repeatability at each setting is given by a value of plus and minus three times the standard deviation of the measurements.

Generally the nominal attenuation levels are provided in different two ways, i.e. absolute or relative attenuation calibration levels. Figure 1a characterizes an attenuator which is calibrated to read the actual or measured attenuation. Figure 1b characterizes an attenuator for which the manufacturer provides the calibration results relative to a zero-point setting. When the attenuator is adjusted to read zero, the actual or measured attenuation will be some value greater than zero.

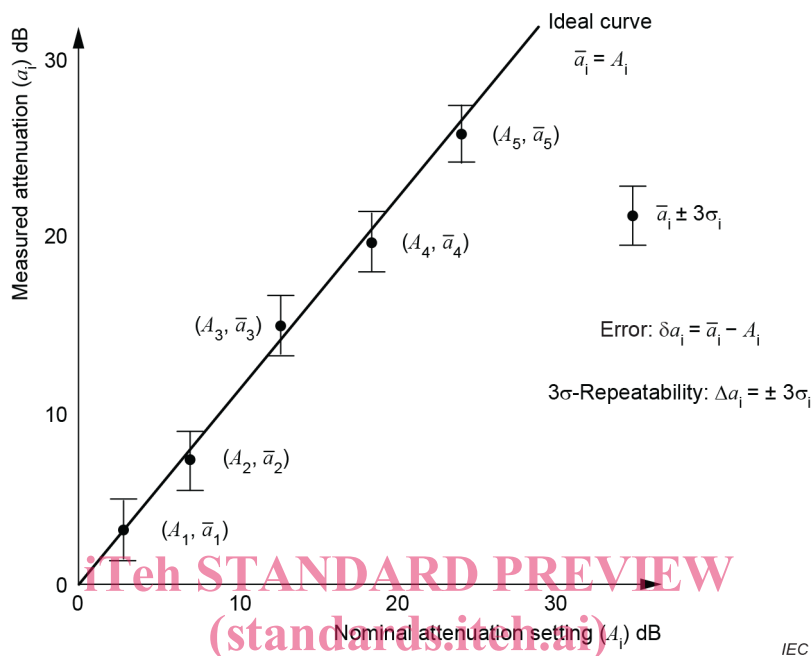


Figure 1a – Absolute calibration of attenuation

<https://standards.iteh.ai/catalog/standards/sist/4a07264c-415a-4319-864c-d73951ac3df6/iec-61300-3-14-2014>

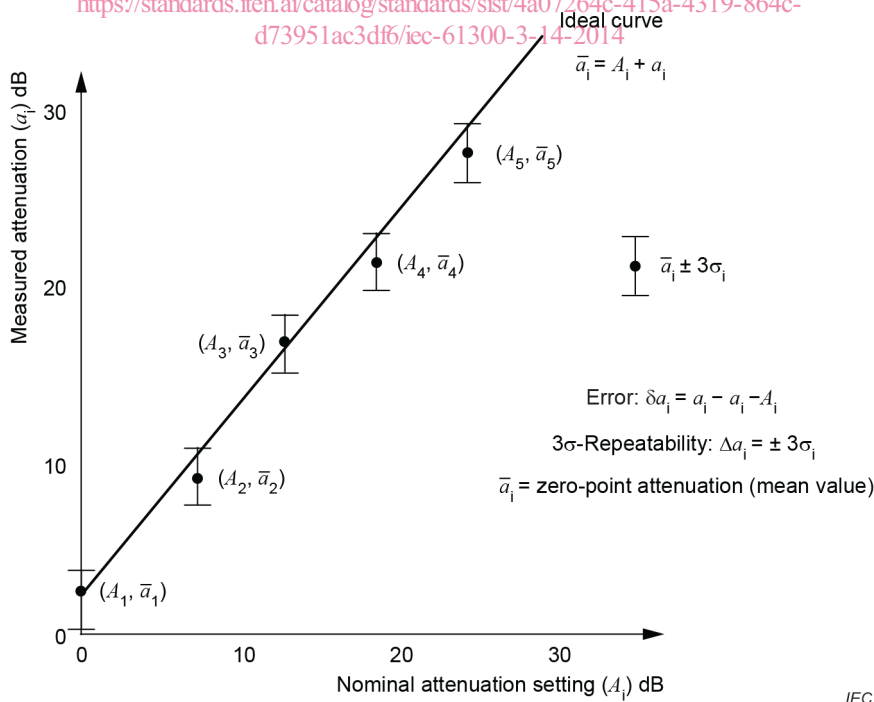


Figure 1b – Calibration relative to zero-point setting

Figure 1 – Measured versus nominal attenuation

4 Apparatus

4.1 Light source (S) and launch conditions

The output power of the light source shall be sufficiently high to permit a sufficiently large measurement dynamic range with the optical detector used. The output power stability shall be less than or equal to 0,05 dB over one hour. The dynamic range of the source/detector combination shall be at least 10 dB greater than the absolute value of the maximum attenuation value to be measured. However the output power into the fibre shall not exceed the maximum operating input power rating of the VOA to be tested.

The wavelength and spectral width of the light source shall correspond to the operating wavelength range and calibration settings of the VOA to be measured.

For the measurement of single-mode VOAs, polarization dependent loss (PDL) may influence the error and repeatability of attenuation values. Unless otherwise specified, random polarization states shall be used or the PDL shall also be characterized.

Other requirements of the light source and launch conditions shall be in accordance with IEC 61300-3-4. An excitation unit shall be used to satisfy the launch condition defined in IEC 61300-1, if necessary. Moreover cladding modes shall be stripped as typically achieved by the fibre coating, so that they do not affect the measurement.

4.2 Detector (D)

A high dynamic range optical power meter should be used for the detector. Its wavelength range shall be wider than the operating wavelength range of the VOA to be measured. In order to make measurements with low uncertainty, the linearity of the optical power meter is most important for the error and repeatability of VOA measurements. The minimum resolution of the detector shall be $\leq 0,01$ dB.

Other requirements of detector shall be in accordance with IEC 61300-3-4.

4.3 Reference fibre (RF)

In order to measure the output power of the light source, a reference fibre is used. The reference fibre shall be of the same performance as the pigtail fibre of the VOA to be measured.

4.4 Temporary joint (TJ)

This is a method, device or mechanical fixture for temporarily aligning two fibre ends into a stable, reproducible, low-loss joint. It is used when direct connection of the device under test (DUT) to the measurement system is not achievable by a standard connector. It may, for example, be a precision V-groove, vacuum chuck, a micromanipulator, or a fusion or mechanical splice. The temporary joint shall be stable to within ± 10 % of the measurement uncertainty required in dB over the time taken to measure P_0 and P_n . A suitable refractive index matching material may be used to improve the stability of the TJ.

Patchcords with direct connection to the light source may be used and the use of TJs is not mandatory.

5 Measurement procedure

5.1 Measurement set-up

Figure 2 shows the measurement set-up.

The position of the fibres during the measurement shall remain fixed between the measurement of P_0 and P_n to avoid changes in attenuation due to bending losses.

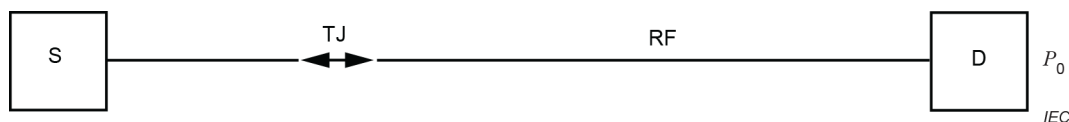


Figure 2a – Measurement of reference power

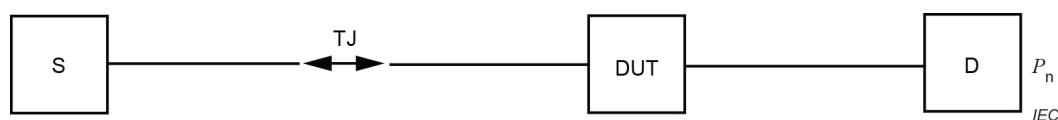


Figure 2b – Measurement of attenuation

Figure 2 – Measurement set-up

5.2 Measurement procedure

The measurement procedure is as follows:

- Assemble the measurement set-up as shown in Figure 2a and measure P_0 .
- Insert the VOA to be measured (DUT) into the measurement set-up as shown in Figure 2b.
- Adjust the DUT to the lowest attenuation level and record the power level of P_1 .
- Increase the attenuation of the DUT to the next lowest attenuation level and record the power level of P_2 .
- Continue to measure and record the power levels of P_3, P_4, \dots, P_n , increasing the attenuation levels to the next higher attenuation level for each step.
- Repeat steps c) to e) and record a second set of readings $P_1(2)$ to $P_n(2)$.
- Repeat step f) for the number of times m specified in the relevant specification.

6 Calculation

6.1 Attenuation error for VOAs with absolute calibration

Calculate the error of the i^{th} attenuation setting using the following equation:

$$\delta a_i = \bar{a}_i - A_i \text{ (dB)} \quad (1)$$

where

$$a_i(n) = -10 \log_{10} [P_i(n) / P_0] \text{ (dB)} \quad (2)$$

$$\bar{a}_i = \frac{1}{m} \sum_{j=1}^m a_i(j) \text{ (dB)} \quad (3)$$

and where A_i is the i^{th} nominal attenuation setting (dB).

6.2 Attenuation error for VOAs with relative calibration

Calculate the error of the i^{th} attenuation setting using the following equation:

$$\delta a_i = \bar{a}_i - a_i - A_i \text{ (dB)} \quad (4)$$

where \bar{a}_1 is the mean value of the zero point attenuation.

6.3 Maximum deviation of attenuation from setting for all attenuation levels

The maximum deviation of attenuation from setting for all attenuation levels can be calculated using the following equation:

$$\delta a_{\max} = \max_{i=1, \dots, n} (|\delta a_i|) \text{ (dB)} \quad (5)$$

6.4 Repeatability of attenuation

Calculate the 3σ -repeatability of attenuation by

$$\Delta a_i = \pm 3 \sigma_i \text{ (dB)} \quad (6)$$

where σ_i is the standard deviation of the measurements calculated by the following equation:

$$\sigma_i = \frac{1}{n} \sum_{j=1}^n (a_i(j) - \bar{a}_i)^2 \text{ (dB)} \quad (7)$$

A minimum of $m = 10$ measurements at each setting are recommended to provide a reasonable estimate of σ_i .

7 Measurement report

The following values shall be described in the measurement report. Annex A shows an example of a sample measurement record.

- i^{th} nominal attenuation level, A_i ;
- error of the i^{th} attenuation levels, δa_i ;
- maximum deviation of attenuation from setting for all attenuation levels, δa_{\max} ;
- repeatability of i^{th} attenuation levels, Δa_i .

It is recommended that a chart plotting the measurement result such as those shown in Figure 1a or Figure 1b is included in the measurement report.