



SLOVENSKI STANDARD

SIST EN 300 396-2 V1.3.1:2006

01-december-2006

Df]nYa b]`gbc dc j b]`fUX]c`fH9 HF 5 ĸ!`HY\ b] bY`nU\ hYj Y`nU`bYdcgfYXb]`bU]b
XY`c j Ub`UfB A C ĸ!`&`rXY. `F UX]`g_]j]X_]`

Terrestrial Trunked Radio (TETRA); Technical requirements for Direct Mode Operation (DMO); Part 2: Radio aspects

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST EN 300 396-2 V1.3.1:2006](https://standards.iteh.ai/catalog/standards/sist/87181104-849a-435c-88f4-9ce4e681f94c/sist-en-300-396-2-v1-3-1-2006)

[https://standards.iteh.ai/catalog/standards/sist/87181104-849a-435c-88f4-](https://standards.iteh.ai/catalog/standards/sist/87181104-849a-435c-88f4-9ce4e681f94c/sist-en-300-396-2-v1-3-1-2006)

[9ce4e681f94c/sist-en-300-396-2-v1-3-1-2006](https://standards.iteh.ai/catalog/standards/sist/87181104-849a-435c-88f4-9ce4e681f94c/sist-en-300-396-2-v1-3-1-2006)

Ta slovenski standard je istoveten z: **EN 300 396-2 Version 1.3.1**

ICS:

33.070.10	Prizemni snopovni radio (TETRA)	Terrestrial Trunked Radio (TETRA)
-----------	---------------------------------	-----------------------------------

SIST EN 300 396-2 V1.3.1:2006 en

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 300 396-2 V1.3.1:2006

<https://standards.iteh.ai/catalog/standards/sist/87181104-849a-435c-88f4-9ce4e681f94c/sist-en-300-396-2-v1-3-1-2006>

ETSI EN 300 396-2 V1.3.1 (2006-09)

European Standard (Telecommunications series)

Terrestrial Trunked Radio (TETRA); Technical requirements for Direct Mode Operation (DMO); Part 2: Radio aspects

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST EN 300 396-2 V1.3.1:2006](https://standards.iteh.ai/catalog/standards/sist/87181104-849a-435c-88f4-9ce4e681f94c/sist-en-300-396-2-v1-3-1-2006)

<https://standards.iteh.ai/catalog/standards/sist/87181104-849a-435c-88f4-9ce4e681f94c/sist-en-300-396-2-v1-3-1-2006>



Reference

REN/TETRA-08146

Keywords

air interface, radio, TETRA**ETSI**

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

iTeh STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 300 396-2 V1.3.1:2006<https://standards.iteh.ai/catalog/standards/sist/87181104-849a-435c-88f4-9ce4e681f944/etsi-en-300-396-2-v1-3-1-2006> **Important notice**

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2006.
All rights reserved.

DECT™, **PLUGTESTS™** and **UMTS™** are Trade Marks of ETSI registered for the benefit of its Members.
TIPHON™ and the **TIPHON logo** are Trade Marks currently being registered by ETSI for the benefit of its Members.
3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Contents

Intellectual Property Rights	6
Foreword.....	6
1 Scope	7
2 References	7
3 Definitions and abbreviations.....	8
3.1 Definitions	8
3.2 Abbreviations	9
4 Radio aspects.....	10
4.1 Introduction	10
4.2 Set of logical channels.....	10
4.3 Reference configuration	10
4.4 Error control schemes.....	11
4.5 Timeslot structure.....	11
4.5.1 Framing structure.....	11
4.5.2 Timeslots and bursts	12
4.5.3 Mapping of logical channels onto physical channels.....	12
4.6 Coding, interleaving and scrambling.....	12
4.7 Modulation	12
4.8 Transmission and reception.....	12
4.9 Other radio-related functions.....	12
4.10 Performance	12
5 Modulation	13
5.1 Introduction	13
5.2 Modulation type	13
5.3 Modulation rate	13
5.4 Modulation symbol definition.....	13
5.5 Modulated signal definition.....	14
5.6 Modulation filter definition	14
5.7 Modulation block diagram	15
6 Radio transmission and reception.....	15
6.1 Introduction	15
6.2 Frequency bands and channel arrangement.....	15
6.3 Reference test planes	15
6.4 Transmitter characteristics.....	15
6.4.1 Output power	15
6.4.2 Power classes	16
6.4.3 Unwanted conducted emissions.....	16
6.4.3.1 Definitions.....	16
6.4.3.2 Unwanted emissions close to the carrier	16
6.4.3.2.1 Emissions during the useful part of the burst	17
6.4.3.2.2 Emissions during the switching transients.....	17
6.4.3.3 Unwanted emissions far from the carrier	17
6.4.3.3.1 Discrete spurious	17
6.4.3.3.2 Wideband noise	18
6.4.3.4 Unwanted emissions during the Linearization CHannel (LCH).....	19
6.4.3.5 Unwanted emissions in the non-transmit state	19
6.4.4 Unwanted radiated emissions	19
6.4.5 Radio frequency tolerance	19
6.4.6 RF output power time mask.....	19
6.4.7 Transmitter intermodulation attenuation.....	20
6.4.7.1 Definition	20
6.4.7.2 Specification.....	20
6.5 Receiver characteristics	21

STANDARD PREVIEW
(standards.iteh.ai)

SIST EN 300 396-2 V1.3.1:2006

[https://standards.iteh.ai/catalog/standards/sist/87181104-849a-435c-8814-](https://standards.iteh.ai/catalog/standards/sist/87181104-849a-435c-8814-9ce4e681194c/sist-en-300-396-2-v1-3-1-2006)

[9ce4e681194c/sist-en-300-396-2-v1-3-1-2006](https://standards.iteh.ai/catalog/standards/sist/87181104-849a-435c-8814-9ce4e681194c/sist-en-300-396-2-v1-3-1-2006)

6.5.1	Blocking characteristics	21
6.5.1.1	Definition	21
6.5.1.2	Specification.....	21
6.5.2	Spurious response rejection	21
6.5.2.1	Definition	21
6.5.2.2	Specification.....	21
6.5.3	Intermodulation response rejection.....	22
6.5.3.1	Definition	22
6.5.3.2	Specification.....	22
6.5.4	Unwanted conducted emissions	22
6.5.4.1	Definition	22
6.5.4.2	Specification.....	22
6.5.5	Unwanted radiated emissions	22
6.6	Transmitter/receiver performance	23
6.6.1	Modulation accuracy.....	23
6.6.1.1	Ideal case.....	23
6.6.1.2	Vector error magnitude requirement at symbol time	23
6.6.2	Receiver performance	24
6.6.2.1	Nominal error rates	24
6.6.2.2	Dynamic reference sensitivity.....	24
6.6.2.3	Receiver performance at reference interference ratios	25
6.6.2.4	Static reference sensitivity	25
6.6.2.5	MS receiver performance for acquisition of synchronization burst	26
6.6.3	Propagation conditions	26
6.6.3.1	Tap-gain process types.....	26
6.6.3.2	DM propagation models.....	27
7	Radio sub-system synchronization	27
7.1	Introduction	27
7.2	Definitions and general requirements for synchronization of DM-MSs.....	27
7.3	Timebase counters.....	28
7.3.1	Definition of counters	28
7.3.2	Relationship between the counters.....	28
7.4	Requirements for the frequency reference source of DM mobiles	29
7.5	Requirements for the synchronization of a slave DM mobile	29
7.6	Synchronization requirements for a master MS operating on channel B in frequency efficient mode	29
8	Channel coding and scrambling	30
8.1	Introduction	30
8.2	General	30
8.2.1	Interfaces in the error control structure.....	30
8.2.2	Notation	31
8.2.3	Definition of error control codes.....	32
8.2.3.1	16-state Rate-Compatible Punctured Convolutional (RCPC) codes	32
8.2.3.1.1	Encoding by the 16-state mother code of rate 1/4	32
8.2.3.1.2	Puncturing of the mother code.....	32
8.2.3.1.3	Puncturing scheme of the RCPC code of rate 2/3.....	33
8.2.3.1.4	Puncturing scheme of the RCPC code of rate 292/432.....	33
8.2.3.1.5	Puncturing scheme of the RCPC code of rate 148/432.....	33
8.2.3.2	$(K_1 + 16, K_1)$ block code	33
8.2.4	Definition of interleaving schemes	33
8.2.4.1	Block interleaving	33
8.2.4.2	Interleaving over N blocks	34
8.2.5	Definition of scrambling	34
8.2.5.1	Scrambling method	34
8.2.5.2	Scrambling sequence.....	34
8.3	Error control schemes.....	35
8.3.1	Signalling channels	35
8.3.1.1	Synchronization Signalling CHannel (SCH/S)	35
8.3.1.2	Half-slot Signalling CHannel (SCH/H) and Stealing CHannel (STCH)	36
8.3.1.3	Full-slot Signalling CHannel (SCH/F)	37
8.3.2	Traffic channels in circuit switched mode	37

8.3.2.1	Traffic channel, net rate = 7,2 kbit/s (TCH/7,2).....	37
8.3.2.2	Traffic channel, net rate = 4,8 kbit/s (TCH/4,8).....	38
8.3.2.3	Traffic channel, net rate = 2,4 kbit/s (TCH/2,4).....	39
8.3.2.4	Speech Traffic Channel, full slot (TCH/S).....	40
8.3.2.5	Speech Traffic Channel, half slot (TCH/S).....	40
9	Channel multiplexing for DM.....	40
9.1	Introduction.....	40
9.2	Logical channels.....	40
9.2.1	Logical channels hierarchy.....	40
9.2.2	Traffic channels.....	41
9.2.3	Control channels.....	41
9.2.3.1	General.....	41
9.2.3.2	Linearization CHannel (LCH).....	41
9.2.3.3	Signalling CHannel (SCH).....	41
9.2.3.4	STealing CHannel (STCH).....	41
9.3	The physical resource.....	41
9.3.1	General.....	41
9.3.2	Timeslots.....	42
9.3.3	DM frame.....	42
9.3.4	Multiframe.....	42
9.4	Physical channels.....	42
9.4.1	General.....	42
9.4.2	Bursts.....	42
9.4.2.1	General.....	42
9.4.2.2	Modulation symbol numbering.....	42
9.4.2.3	Modulation bit numbering.....	43
9.4.2.4	Burst timing.....	43
9.4.3	Type of bursts.....	43
9.4.3.1	General.....	43
9.4.3.2	Modulation bits allocation.....	44
9.4.3.2.1	DM Normal Burst (DNB).....	44
9.4.3.2.2	DM Linearization Burst (DLB).....	44
9.4.3.2.3	DM Synchronization Burst (DSB).....	44
9.4.3.3	Burst fields.....	45
9.4.3.3.1	Frequency correction field.....	45
9.4.3.3.2	Inter-slot frequency correction field.....	45
9.4.3.3.3	Normal training sequence and preamble.....	45
9.4.3.3.4	Synchronization training sequence.....	46
9.4.3.3.5	Phase adjustment bits.....	46
9.4.3.3.6	Tail bits.....	46
9.4.4	DM-MS multiple slot transmission.....	47
9.4.5	General mapping of logical channels.....	47
10	Radio subsystem link control.....	47
10.1	Introduction.....	47
10.2	RF power control.....	47
10.3	Radio link measurements.....	48
10.3.1	Signal strength.....	48
10.3.2	Signal quality.....	48
Annex A (informative):	Bibliography.....	49
Annex B (informative):	Change requests.....	50
History.....		51

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Technical Committee Terrestrial Trunked Radio (TETRA).

The present document is part 2 of a multi-part deliverable covering the Terrestrial Trunked Radio (TETRA); Technical requirements for Direct Mode Operation (DMO), as identified below:

Part 1: "General network design";

Part 2: "Radio aspects";

Part 3: "Mobile Station to Mobile Station (MS-MS) Air Interface (AI) protocol";

Part 4: "Type 1 repeater air interface";

Part 5: "Gateway air interface";

Part 6: "Security"; <https://standards.iteh.ai/catalog/standards/sist/87181104-849a-435c-88f4-9ce4e681f94c/sist-en-300-396-2-v1-3-1-2006>

Part 7: "Type 2 repeater air interface";

Part 8: "Protocol Implementation Conformance Statement (PICS) proforma specification";

Part 10: "Managed Direct Mode Operation (M-DMO)".

NOTE: Part 8 (PICS) of this multi-part deliverable is of status "historical" and will not be updated according to this version of the standard.

National transposition dates

Date of adoption of this EN:	1 September 2006
Date of latest announcement of this EN (doa):	31 December 2006
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	30 June 2007
Date of withdrawal of any conflicting National Standard (dow):	30 June 2007

1 Scope

This multi-part deliverable defines the TERrestrial Trunked RADio system (TETRA) Direct Mode Operation (DMO). It specifies the basic air interface, the interworking between Direct Mode (DM) groups via repeaters, and interworking with the TETRA Voice plus Data (V+D) system via gateways. It also specifies the security aspects in TETRA DMO, and the intrinsic services that are supported in addition to the basic bearer and teleservices.

The present document applies to the TETRA DMO Mobile Station - Mobile Station (MS - MS) air interface and contains the specifications of the physical layer according to the OSI seven layer reference model.

It establishes the TETRA DM radio aspects (layer 1 and lower MAC):

- it defines and specifies the modulation;
- it defines and specifies the radio transmission and reception;
- it defines and specifies the synchronization;
- it defines and specifies the channel coding;
- it defines and specifies the channel multiplexing;
- it defines and specifies the control over the radio link.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication and/or edition number or version number) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

- | | |
|-----|---|
| [1] | ETSI EN 300 113-1: "Electromagnetic compatibility and Radio spectrum Matters (ERM); Land mobile service; Radio equipment intended for the transmission of data (and/or speech) using constant or non-constant envelope modulation and having an antenna connector; Part 1: Technical characteristics and methods of measurement". |
| [2] | ETSI EN 300 396-3: "Terrestrial Trunked Radio (TETRA); Technical requirements for Direct Mode Operation (DMO); Part 3: Mobile Station to Mobile Station (MS-MS) Air Interface (AI) protocol". |
| [3] | ETSI EN 300 395-2: "Terrestrial Trunked Radio (TETRA); Speech codec for full-rate traffic channel; Part 2: TETRA codec". |
| [4] | ETSI TS 100 392-15: "Terrestrial Trunked Radio (TETRA); Voice plus Data (V+D); Part 15: TETRA frequency bands, duplex spacings and channel numbering". |

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

Bit Error Ratio (BER): ratio of the bits wrongly received to all bits received in a given logical channel

call transaction: all of the functions associated with a complete unidirectional transmission of information

NOTE: A call is made up of one or more call transactions.

changeover: within a call, process of effecting a transfer of the master role (and hence transmitting MS) at the end of one call transaction so that another can commence

Direct Mode Operation (DMO): mode of simplex operation where mobile subscriber radio units may communicate using radio frequencies which may be monitored by, but which are outside the control of, the TETRA TMO network

NOTE: Direct Mode Operation is performed without intervention of any base station.

Direct Mode Mobile Station (DM-MS): physical grouping that contains all of the mobile equipment that is used to obtain TETRA DM services

NOTE: For synchronization purposes, Direct Mode Mobile Stations can have one of two status levels:

- **master:** if the DM-MS is either active in a call transaction transmitting traffic or control data, or is reserving the channel by means of channel reservation signalling and hence is **providing** synchronization information to the channel;
- **slave:** if the DM-MS is receiving traffic and/or signalling and hence is **deriving** synchronization information from the channel.

DM channel: specific grouping of timeslots in the DM multiplex structure related to a particular DM RF carrier (i.e. DM frequency)

NOTE: The grouping may not always be fixed, but in DMO when operating in frequency efficient mode as an example, there are two DM channels, identified by the letters A and B.

Dual mode switchable Mobile Station (DU-MS): MS that is capable to operate in TETRA DMO or in TETRA TMO one mode at a time

NOTE: Only one mode can be selected at any given time and the MS is not capable of monitoring a DM RF carrier while in TMO or a TMO channel while in DMO.

Dual Watch Mobile Station (DW-MS): MS that is either full dual watch MS (F-DW-MS) or idle dual watch MS (I-DW-MS)

NOTE: When idle, the MS periodically monitors both the DM RF carrier and the TMO control channel. If the MS is performing full dual watch, it is also capable of periodically monitoring the TMO control channel while in a DM call and a DM RF carrier while in a TMO call. Alternatively the MS may perform idle dual watch, in which case it need not be capable of monitoring the TMO control channel while involved in a DM activity (e.g. call) or a DM RF carrier while involved in a TMO activity (e.g. call).

frequency efficient mode: mode of operation where two independent DM communications are supported on a single RF carrier

NOTE: In frequency efficient mode the two DM channels are identified as channel A and channel B.

logical channel: any distinct data path

NOTE: Logical channels are considered to operate between logical endpoints.

Message Erasure Rate (MER): ratio of the messages detected as wrong by the receiver to all messages received in a given logical channel

normal mode: mode of operation where only one DM communication is supported on an RF carrier

occupation: time where a call transaction is in progress on a channel

pre-emption: transfer of the master role to the requested DM-MS

NOTE: This process may occur within a call during occupation or to set-up a new call during either occupation or reservation.

Probability of Undetected Erroneous Message (PUEM): limit ratio of the erroneous messages detected as right by the receiver to all messages received in a given logical channel

quarter symbol number: timing of quarter symbol duration 125/9 μ s within a burst

radio frequency carrier (RF carrier): radio frequency channel

NOTE: This is a specified portion of the RF spectrum. In DMO, the RF carrier separation is 25 kHz.

reservation: time where a "channel reservation" signal is present on the channel

simplex: mode of working in which information can be transferred in both directions but not at the same time

timebase: device which determines the timing state of signals transmitted by a Direct Mode Mobile Station

timeslot number: counter indicating the timing of timeslots within a DMO frame

Trunked Mode Operation (TMO): mode of operation where MSs communicate via the TETRA V+D air interface which is controlled by the TETRA Switching and Management Infrastructure (SwMI)

NOTE: This is also called V+D operation. The abbreviation "TMO" is used in the present document to pair with the abbreviation "DMO" instead of the abbreviation "V+D". "TMO" abbreviation is not used in EN 300 392-1 and EN 300 392-2.

useful part of a burst: part of the burst between and including the symbol time of SN0 and the symbol time of SNmax, with SN0 and SNmax as defined in clause 9 of EN 300 396-2 V1.3.1:2006

<https://standards.iteh.ai/catalog/standards/sist/87181104-849a-435c-88f4-9ce4e681f94c/sist-en-300-396-2-v1-3-1-2006>

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AI	Air Interface
BER	Bit Error Ratio
BN	Bit Number
DLB	Direct mode Linearization Burst
DLL	Data Link Layer
DM-MS	Direct Mode Mobile Station
DMO	Direct Mode Operation
DNB	Direct mode Normal Burst
DR50	DM propagation model Rural area for 50 km/h
DQPSK	Differential Quaternary Phase Shift Keying
DSB	Direct mode Synchronization Burst
DU50	DM propagation model Urban area for 50 km/h
DU-MS	Dual mode (TMO - DMO) switchable Mobile Station
DW-MS	Dual Watch Mobile Station
FN	Frame Number
LCH	Linearization CHannel
MAC	Medium Access Control
MER	Message Erasure Rate
mod	modulo (base for counting)
MS	Mobile Station
PA	Power Amplifier
PACQ	Probability of synchronization burst ACQuisition
PUEM	Probability of Undetected Erroneous Message
QN	Quarter symbol Number

RCPC	Rate-Compatible Punctured Convolutional
RF	Radio Frequency
RMS	Root Mean Square
SCH	Signalling CHannel
SN	Symbol Number
STCH	STealing CHannel
TCH	Traffic CHannel
TN	Timeslot Number
TMO	Trunked Mode Operation

4 Radio aspects

4.1 Introduction

Clause 4 is an introduction to the radio aspects of the TETRA DMO standard. It consists of a general description of the organization of the radio-related functions with reference to the clauses where each part is specified in detail. Furthermore, it introduces the reference configuration that will be used throughout the present document.

4.2 Set of logical channels

The radio subsystem provides a certain number of logical channels as defined in clause 9. The logical channels represent the interface between the protocol and the radio.

4.3 Reference configuration

For the purpose of elaborating the specification of the radio-related functions, a reference configuration of the transmission chain is used, as shown in figure 11. Only the transmission part is specified, the receiver being specified only via the overall performance requirements. With reference to this configuration, the clauses address the following functional units:

- clause 5: differential encoding and modulation;
- clause 6: characteristics of transmitter and receiver;
- clause 8: coding, reordering and interleaving, and scrambling;
- clause 9: burst building and logical channel multiplexing;
- clause 10: radio link measurements.

This reference configuration also defines a number of points of vocabulary in relation to the names of bits at different levels in the configuration.

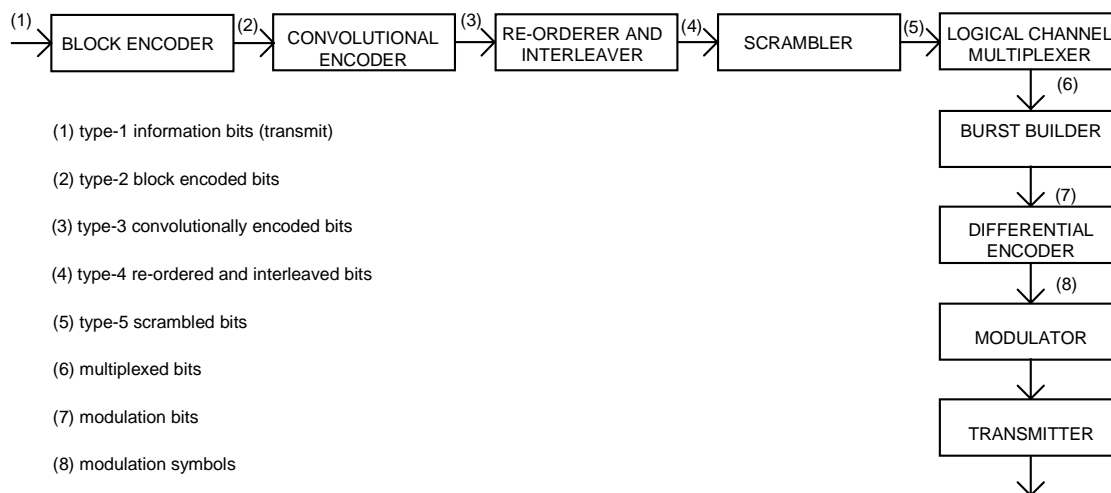


Figure 1: Reference configuration

4.4 Error control schemes

The different error control schemes are described in detail in clause 8.

4.5 Timeslot structure

The carrier separation is 25 kHz.

The basic radio resource is a timeslot lasting 14,167 ms (85/6 ms) and transmitting information at a modulation rate of 36 kbit/s. This means that the timeslot duration, including guard and ramping times, is 510 bit (255 symbol) durations.

The following clauses briefly introduce the structures of multiframes, frames, timeslots and bursts, as well as the mapping of the logical channels onto the physical channels. The appropriate specifications are found in clause 9.

4.5.1 Framing structure

A diagrammatic representation of the framing structure is shown in figure 2.

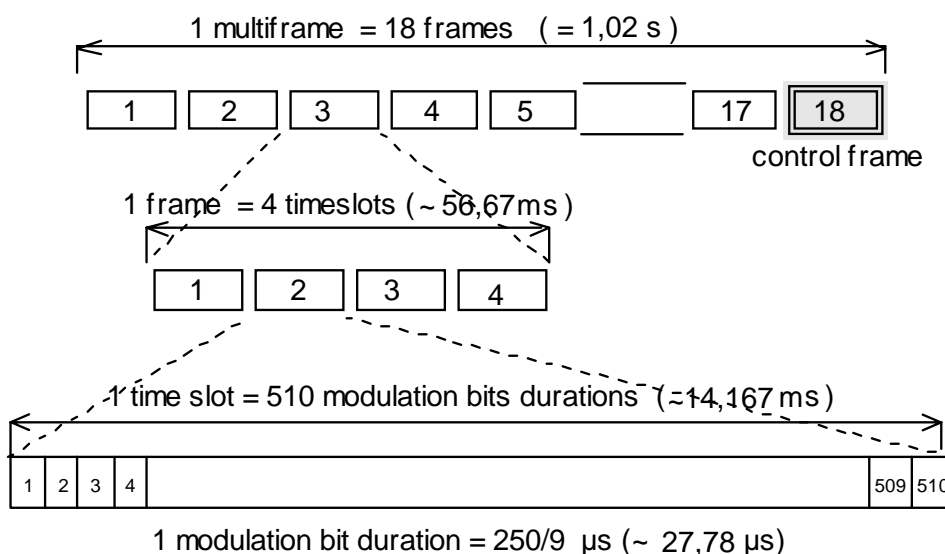


Figure 2: DM framing structure

One multiframe is subdivided into 18 frames, and has a duration of 1,02 s. The eighteenth frame in a multiframe is a control frame.

One frame is subdivided into 4 timeslots, and has a duration of $170/3 \approx 56,67$ ms.

4.5.2 Timeslots and bursts

The timeslot is a time interval of $85/6 \approx 14,167$ ms, which corresponds to 255 symbol durations.

The physical contents of a timeslot is carried by a burst. There are three different types of bursts, as defined in clause 9.

4.5.3 Mapping of logical channels onto physical channels

The mapping of the logical channels onto the physical channels, according to the mode of operation, is defined in clause 9.

4.6 Coding, interleaving and scrambling

The coding, interleaving and scrambling schemes associated with each logical channel are specified in clause 8.

4.7 Modulation

The modulation scheme is $\pi/4$ -DQPSK (Differential Quaternary Phase-Shift Keying) with root-raised cosine modulation filter and a roll-off factor of 0,35. The modulation rate is 36 kbit/s. This scheme is specified in detail in clause 5.

4.8 Transmission and reception

The modulated stream is transmitted on a radio frequency carrier.

The specific RF carrier, together with the requirements on the transmitter and the receiver characteristics are specified in clause 6.

DM-MS power classes are defined in clause 6.

4.9 Other radio-related functions

Transmission involves other functions. These functions, which may necessitate the handling of specific protocols, are the radio subsystem synchronization, and the radio subsystem link control.

The synchronization incorporates:

- frequency and time acquisition by the receiver;
- adjustment of the timebase in the DM-MS.

The requirements on synchronization are specified in clause 7.

4.10 Performance

Under typical urban fading conditions the quality threshold for full-rate speech is reached at a C/I_c (co-channel interference) value of 19 dB, and the dynamic reference sensitivity level is -103 dBm for mobile equipment. Details of performance requirements in various channel conditions are given in clause 6.

5 Modulation

5.1 Introduction

The following specifications apply to the baseband part of the transmitter.

5.2 Modulation type

The modulation used shall be $\pi/4$ -shifted Differential Quaternary Phase Shift Keying ($\pi/4$ -DQPSK).

5.3 Modulation rate

The modulation rate shall be 36 kbit/s.

5.4 Modulation symbol definition

$B(m)$ denotes the modulation bit of a sequence to be transmitted, where m is the bit number. The sequence of modulation bits shall be mapped onto a sequence of modulation symbols $S(k)$, where k is the corresponding symbol number.

The modulation symbol $S(k)$ shall result from a differential encoding. This means that $S(k)$ shall be obtained by applying a phase transition $D\phi(k)$ to the previous modulation symbol $S(k-1)$, hence, in complex notation:

$$S(k) = S(k-1) \exp(jD\phi(k)) \quad (1)$$

$$S(0) = 1$$

The above expression for $S(k)$ corresponds to the continuous transmission of modulation symbols carried by an arbitrary number of bursts. The symbol $S(0)$ is the symbol before the first symbol of the first burst and shall be transmitted as a phase reference.

The phase transition $D\phi(k)$ shall be related to the modulation bits as shown in table 1 and figure 3.

Table 1: Phase transitions

$B(2k-1)$	$B(2k)$	$D\phi(k)$
1	1	$-3\pi/4$
0	1	$+3\pi/4$
0	0	$+\pi/4$
1	0	$-\pi/4$

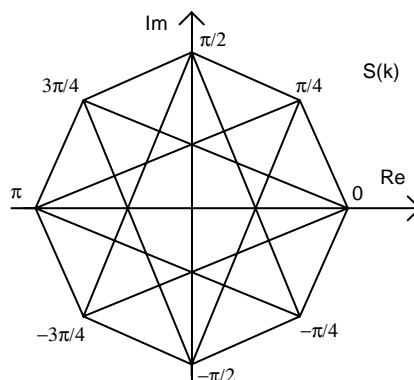


Figure 3: Modulation symbol constellation and possible transitions