

INTERNATIONAL STANDARD

NORME INTERNATIONALE



**Fibre-optic communication subsystem test procedures –
Part 4-1: Installed cabling plant – Multimode attenuation measurement**
(standards.iteh.ai)

**Procédures d'essai des sous-systèmes de télécommunication fibroniques –
Partie 4-1: Installation câblée – Mesure de l'affaiblissement en multimodal**

IEC 61280-4-1:2019
<https://standards.iteh.ai/catalog/standards/sist/61280-4-1-c512-4500-9c2a>
1debed87870b/iec-61280-4-1-2019





THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2019 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22,000 terminological entries in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

67,000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

Recherche de publications IEC -

webstore.iec.ch/advsearchform

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études,...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

IEC Just Published - webstore.iec.ch/justpublished

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

Service Clients - webstore.iec.ch/csc

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: sales@iec.ch.

Electropedia - www.electropedia.org

Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 000 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 16 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

Glossaire IEC - std.iec.ch/glossary

67 000 entrées terminologiques électrotechniques, en anglais et en français, extraites des articles Termes et Définitions des publications IEC parues depuis 2002. Plus certaines entrées antérieures extraites des publications des CE 37, 77, 86 et CISPR de l'IEC.

INTERNATIONAL STANDARD

NORME INTERNATIONALE



**Fibre-optic communication subsystem test procedures –
Part 4-1: Installed cabling plant – Multimode attenuation measurement**

**Procédures d'essai des sous-systèmes de télécommunication fibroniques –
Partie 4-1: Installation câblée – Mesure de l'affaiblissement en multimodal**

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

COMMISSION
ELECTROTECHNIQUE
INTERNATIONALE

ICS 33.180.01

ISBN 978-2-8322-6893-3

**Warning! Make sure that you obtained this publication from an authorized distributor.
Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.**

CONTENTS

FOREWORD.....	7
1 Scope.....	9
2 Normative references	9
3 Terms, definitions, graphical symbols and abbreviated terms.....	9
3.1 Terms and definitions.....	10
3.2 Graphical symbols	12
3.3 Abbreviated terms.....	14
4 Test methods.....	14
4.1 General.....	14
4.2 Cabling configurations and applicable test methods	15
5 Overview of uncertainties	17
5.1 General.....	17
5.2 Sources of significant uncertainties.....	17
5.3 Consideration of the PM.....	18
5.4 Consideration of test cord connector grade	18
5.5 Typical uncertainty values.....	18
6 Apparatus.....	19
6.1 General.....	19
6.2 Light source	19
6.2.1 Stability	19
6.2.2 Spectral characteristics (LSPM measurement).....	19
6.3 Launch cord.....	20
6.4 Receive or tail cord.....	20
6.5 Substitution cord.....	21
6.6 Power meter – LSPM methods only.....	21
6.7 OTDR apparatus.....	21
6.8 Connector end face cleaning and inspection equipment.....	22
6.9 Adapters	22
7 Procedures.....	22
7.1 General.....	22
7.2 Common procedures.....	22
7.2.1 Care of the test cords	22
7.2.2 Make reference measurements (LSPM methods only).....	22
7.2.3 Inspect and clean the ends of the optical fibres in the cabling.....	22
7.2.4 Make the measurements.....	23
7.2.5 Make the calculations	23
7.2.6 Duplex and bi-directional testing.....	23
7.3 Calibration	23
7.4 Safety	23
8 Calculations.....	23
9 Documentation	23
9.1 Information for each test	23
9.2 Information to be available.....	24
Annex A (normative) One-cord method	25
A.1 Applicability of test method	25

A.2	Apparatus	25
A.3	Procedure	25
A.4	Calculation	26
A.5	Components of reported attenuation	26
Annex B	(normative) Three-cord method	27
B.1	Applicability of test method	27
B.2	Apparatus	27
B.3	Procedure	27
B.4	Calculations	28
B.5	Components of reported attenuation	28
Annex C	(normative) Two-cord method	29
C.1	Applicability of test method	29
C.2	Apparatus	29
C.3	Procedure	29
C.4	Calculations	30
C.5	Components of reported attenuation	30
Annex D	(normative) Equipment cord method	32
D.1	Applicability of the test method	32
D.2	Apparatus	32
D.3	Procedure	32
D.4	Calculation	33
D.5	Components of reported attenuation	33
D.6	Typical uncertainty values	34
Annex E	(normative) Optical time domain reflectometer	35
E.1	Applicability of the test method	35
E.2	Apparatus	35
E.2.1	General	35
E.2.2	OTDR	35
E.2.3	Test cords	35
E.3	Procedure (test method)	36
E.4	Calculation	37
E.4.1	General	37
E.4.2	Connection location	37
E.4.3	Definition of power levels F_1 and F_2	38
E.4.4	Alternative calculation	38
E.5	OTDR uncertainties	40
Annex F	(normative) Requirements for the source characteristics	42
F.1	Encircled flux	42
F.2	Assumptions and limitations	42
F.3	Encircled flux templates	42
F.3.1	General	42
F.3.2	Uncertainties expectations	43
F.3.3	Templates	43
F.4	Graphical representation of templates	44
Annex G	(informative) OTDR configuration information	46
G.1	General	46
G.2	Fundamental parameters that define the operational capability of an OTDR	47
G.2.1	Dynamic range	47

G.2.2	Pulse width	47
G.2.3	Averaging time	47
G.2.4	Dead zone	47
G.3	Other parameters	47
G.3.1	Index of refraction.....	47
G.3.2	Measurement range	48
G.3.3	Distance sampling	48
G.4	Other measurement configurations	48
G.4.1	General	48
G.4.2	Macrobend or splice attenuation measurement	48
G.4.3	Splice attenuation measurement.....	49
G.4.4	Measurement with high reflection connectors or short length cabling	49
G.4.5	Ghost	51
G.5	More on the measurement method	52
G.6	Bi-directional measurement.....	53
G.7	Non-recommended practices.....	54
G.7.1	Measurement without tail test cord	54
G.7.2	Cursor measurement	54
Annex H (informative)	Test cord attenuation verification	55
H.1	General.....	55
H.2	Apparatus	55
H.3	Procedure	55
H.3.1	General	55
H.3.2	Test cord verification for the one-cord and two-cord methods when using non-pinned/unpinned and non-plug/socket style connectors	56
H.3.3	Test cord verification for the one-cord and two-cord methods when using pinned/unpinned or plug/socket style connectors.....	57
H.3.4	Test cord verification for the three-cord method when using non-pinned/unpinned and non-plug/socket style connectors	59
H.3.5	Test cord verification for the three-cord method when using pinned/unpinned or plug/socket style connectors	61
Annex I (normative)	On the use of reference-grade test cords.....	63
I.1	General.....	63
I.2	Practical configurations and assumptions.....	63
I.2.1	Component specifications	63
I.2.2	Conventions	64
I.2.3	Reference planes	64
I.3	Impact of using reference grade test cords for recommended LSPM methods	64
I.4	Examples for LSPM measurements.....	65
I.4.1	Example 1 (configuration A, 1-C method – Annex A).....	65
I.4.2	Example 2 (configuration D, EC method – Annex D)	65
I.5	Impact of using reference-grade test cords for different configurations using the OTDR test method	66
I.5.1	Cabling configurations A, B and C	66
I.5.2	Cabling configuration D	67
Annex J (informative)	Launch cord output near-field verification.....	69
J.1	Direct verification	69
J.2	Test equipment manufacturer verification.....	69
J.3	Field check with physical artefact.....	69
J.3.1	General	69

J.3.2	Procedure for attenuation characterization of artefacts	71
J.3.3	Construction details	71
J.3.4	Example results	72
Bibliography.....		76
Figure 1	– Connector symbols	13
Figure 2	– Symbol for cabling under test.....	13
Figure 3	– Reference plane for configuration A tested with the 1-cord method	16
Figure 4	– Reference plane for configuration B tested with the 3-cord method	16
Figure 5	– Reference plane for configuration C tested with the 2-cord method	17
Figure 6	– Reference plane for configuration D tested with the EC method	17
Figure 7	– OTDR schematic.....	21
Figure A.1	– Reference measurement.....	26
Figure A.2	– Test measurement	26
Figure B.1	– Reference measurement.....	27
Figure B.2	– Test measurement	28
Figure C.1	– Reference measurement.....	29
Figure C.2	– Test measurement.....	30
Figure C.3	– Test measurement for plug-socket style connectors.....	30
Figure D.1	– Reference measurement.....	33
Figure D.2	– Test measurement.....	33
Figure E.1	– OTDR method.....	36
Figure E.2	– Location of the ports of the cabling under test.....	37
Figure E.3	– Graphic construction of F_1 and F_2	38
Figure E.4	– Graphic construction of F_1 , F_{11} , F_{12} and F_2	40
Figure F.1	– Encircled flux example	45
Figure G.1	– Splice and macrobend attenuation measurement.....	49
Figure G.2	– Attenuation measurement with high reflection connectors.....	50
Figure G.3	– Attenuation measurement of a short length cabling.....	51
Figure G.4	– OTDR trace with ghost	52
Figure G.5	– Cursor positioning	53
Figure H.1	– Obtaining reference power level P_0	57
Figure H.2	– Obtaining power level P_1	57
Figure H.3	– Obtaining reference power level P_0	58
Figure H.4	– Obtaining power level P_1	58
Figure H.5	– Obtaining reference power level P_0	59
Figure H.6	– Obtaining power level	59
Figure H.7	– Obtaining reference power level P_0	60
Figure H.8	– Obtaining power level P_1	60
Figure H.9	– Obtaining power level P_5	61
Figure H.10	– Obtaining reference power level P_0	62

Figure H.11 – Obtaining power level P_1	62
Figure I.1 – Cabling configurations A, B and C tested with the OTDR method	66
Figure I.2 – Cabling configuration D tested with the OTDR method	68
Figure J.1 – Initial power measurement.....	70
Figure J.2 – Verification of reference-grade connection	70
Figure J.3 – Two offset splices.....	70
Figure J.4 – Five offset splices	71
Figure J.5 – EF centred	72
Figure J.6 – EF underfilling	73
Figure J.7 – EF overfilling	73
Figure J.8 – L1 attenuation with mandrel.....	74
Figure J.9 – L1 attenuation with mandrel and mode conditioner	74
Figure J.10 – L2 attenuation with mandrel.....	74
Figure J.11 – L2 attenuation with mandrel and mode conditioning.....	75
Figure J.12 – L3 attenuation with mandrel.....	75
Figure J.13 – L3 attenuation with mandrel and mode conditioning.....	75
Table 1 – Cabling configurations	15
Table 2 – Test methods and configurations	15
Table 3 – Measurements bias related to test cord connector grade	18
Table 4 – Uncertainty for a given attenuation at 850 nm.....	19
Table 5 – Spectral requirements	19
Table D.1 – Uncertainty for a given attenuation at 850 nm.....	34
Table F.1 – Attenuation, threshold tolerance and confidence level	43
Table F.2 – EF requirements for 50 μm core optical fibre cabling at 850 nm	43
Table F.3 – EF requirements for 50 μm core optical fibre cabling at 1 300 nm.....	44
Table F.4 – EF requirements for 62,5 μm core optical fibre cabling at 850 nm.....	44
Table F.5 – EF requirements for 62,5 μm core optical fibre cabling at 1 300 nm.....	44
Table G.1 – Default effective group index of refraction values.....	48
Table I.1 – Measurement bias when using reference-grade test cords	65
Table I.2 – Measurement bias when using reference grade test cords – OTDR test method	67

ITeH STANDARD PREVIEW
 (standards.iteh.ai)
 IEC 61280-4-1:2019
<https://standards.iteh.ai/catalog/standards/sis/6d283d4d-c512-45d6-9c2a-1de218787915/iec-61280-4-1-2019>

INTERNATIONAL ELECTROTECHNICAL COMMISSION

FIBRE-OPTIC COMMUNICATION SUBSYSTEM TEST PROCEDURES –**Part 4-1: Installed cabling plant – Multimode attenuation measurement**

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 61280-4-1 has been prepared by subcommittee 86C: Fibre optic systems and active devices, of IEC technical committee 86: Fibre optics.

This third edition cancels and replaces the second edition, published in 2009. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) changes to Annex F on encircled flux to harmonise with IEC TR 62614-2, but keeping the encircled flux limits defined in Tables F.2 to F.5 unchanged;
- b) addition of an equipment cord method in Annex D;
- c) inclusion of testing bend insensitive multimode optical fibre;
- d) updates to measurement uncertainty;
- e) definition of additional cabling configurations;
- f) changes to Table 5 on spectral requirements.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
86C/1575/FDIS	86C/1592/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 61280 series, published under the general title *Fibre optic communication subsystem test procedures*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

iTeh STANDARD PREVIEW

(standards.iteh.ai)

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

[https://standards.iteh.ai/catalog/standards/sist/8d283d4d-c512-45d6-9c2a-](https://standards.iteh.ai/catalog/standards/sist/8d283d4d-c512-45d6-9c2a-1debed87870b/iec-61280-4-1-2019)

[1debed87870b/iec-61280-4-1-2019](https://standards.iteh.ai/catalog/standards/sist/8d283d4d-c512-45d6-9c2a-1debed87870b/iec-61280-4-1-2019)

The contents of the corrigendum of April 2020 have been included in this copy.

FIBRE-OPTIC COMMUNICATION SUBSYSTEM TEST PROCEDURES –

Part 4-1: Installed cabling plant – Multimode attenuation measurement

1 Scope

This part of IEC 61280 is applicable to the measurement of attenuation of installed optical fibre cabling plant using multimode optical fibre. This cabling plant can include multimode optical fibres, connectors, adapters, splices, and other passive devices. The cabling can be installed in a variety of environments including residential, commercial, industrial, and data centre premises, as well as outside plant environments. The test equipment used in this document has one single fibre connector interface or two single fibre connector interfaces.

In this document, the optical fibres that are addressed include sub-categories A1-OM_x, where $x = 2, 3, 4$ and 5 (50/125 μm) and A1-OM1 (62,5/125 μm) multimode optical fibres, as specified in IEC 60793-2-10. The attenuation measurements of the other multimode categories can be made using the approaches of this document, but the source conditions for the other categories have not been defined.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60825-2, *Safety of laser products – Part 2: Safety of optical fibre communication systems (OFCS)*

IEC 61280-1-3, *Fibre optic communication subsystem test procedures – Part 1-3: General communication subsystems – Central wavelength and spectral width measurement*

IEC 61280-1-4, *Fibre optic communication subsystem test procedures – Part 1-4: General communication subsystems – Light source encircled flux measurement method*

IEC 61300-3-35, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-35: Examinations and measurements – Visual inspection of fibre optic connectors and fibre-stub transceivers*

IEC 61315, *Calibration of fibre-optic power meters*

IEC 61746-2, *Calibration of optical time-domain reflectometers (OTDR) – Part 2: OTDR for multimode fibres*

3 Terms, definitions, graphical symbols and abbreviated terms

For the purposes of this document, the following terms, definitions, graphical symbols and abbreviated terms apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1 Terms and definitions

3.1.1

attenuation

A

reduction of optical power induced by transmission through a medium such as cabling

$$A = 10 \log(P_{in}/P_{out})$$

where

P_{in} and P_{out} are the power, typically measured in mW, into and out of the cabling

Note 1 to entry: Attenuation is expressed in dB.

3.1.2

light source power meter

LSPM

test system consisting of a light source (LS) and power meter (PM) used to measure the attenuation of installed cabling plant

3.1.3

optical time domain reflectometer

OTDR

test system consisting of an optical time-domain reflectometer instrument used to characterize and measure the attenuation of installed cabling plant and specific elements within that cabling plant

Note 1 to entry: This note applies to the French language only.

3.1.4

test cord

terminated optical fibre cord used to connect the optical source or detector to the cabling, or to provide suitable interfaces to the cabling under test

Note 1 to entry: There are five types of test cords:

- launch cord: used to connect the light source to the cabling;
- receive cord: used to connect the cabling to the power meter (LSPM only);
- tail cord: attached to the far end of the cabling when an OTDR is used at the near end. This provides a means of evaluating attenuation of the whole of the cabling including the far end connection;
- adapter cord: used to transition between sockets or other incompatible connectors in a required test configuration;
- substitution cord: a test cord used within a reference measurement which is replaced during the measurement of the attenuation of the cabling under test.

3.1.5

bi-directional measurement

two measurements of the same optical fibre, made by launching light into opposite ends of that fibre

3.1.6

configuration

form or arrangements of parts or elements such as terminations, connections and splices

3.1.7 encircled flux EF

fraction of cumulative near-field power to the total output power as a function of radial distance from the optical centre of the core

[SOURCE: IEC 62614:2010, 3.2]

3.1.8 reference-grade termination

connector and plug with tightened tolerances terminated onto an optical fibre with tightened tolerances such that the expected attenuation of a connection formed by mating two such assemblies is lower and more repeatable than a standard-grade termination

Note 1 to entry: An adapter, required to assure the reduced attenuation, may be considered as part of the reference-grade termination where required by the test configuration.

Note 2 to entry: IEC 61755-6-2 defines reference-grade terminations for 50/125 µm fibre.

3.1.9 connector

component normally attached to an optical cable or piece of apparatus for the purpose of providing frequent optical interconnection/disconnection of optical fibres or cables

[SOURCE: IEC TR 61931:1998, 2.6.1, modified – The words in brackets, "optical" and "fibre", have been omitted from the term.]

3.1.10 plug

male-type part of a connector

[IEC 61280-4-1:2019](https://standards.iteh.ai/catalog/standards/sist/8d283d4d-c512-45d6-9c2a-1d87870b/iec-61280-4-1-2019)

[https://standards.iteh.ai/catalog/standards/sist/8d283d4d-c512-45d6-9c2a-](https://standards.iteh.ai/catalog/standards/sist/8d283d4d-c512-45d6-9c2a-1d87870b/iec-61280-4-1-2019)

[SOURCE: IEC TR 61931:1998, 2.6.2]

3.1.11 adapter

female-type part of a connector in which one or two plugs are inserted and aligned

[SOURCE: IEC TR 61931:1998, 2.6.4]

3.1.12 socket-style connector

connector for which the adapter, including any alignment device, is integrated with and permanently attached to the connector plug on one side of the connection

Note 1 to entry: Examples include many harsh environment connectors.

3.1.13 reference test method RTM

test method for measuring a given characteristic strictly according to the definition of this characteristic, and giving results which are accurate, reproducible and relatable to practical use

Note 1 to entry: This note applies to the French language only.

[SOURCE: IEC TR 61931:1998, 2.8.1, modified – The words in brackets, "for optical fibres", have been omitted from the term.]

3.1.14 alternative test method

ATM

test method for measuring a given characteristic in a manner consistent with the definition of this characteristic and giving results which are reproducible and relatable to the reference test method and to practical use

[SOURCE: IEC TR 61931:1998, 2.8.2, modified – The alternative term, "practical test method (for optical fibres)" has been omitted from the term.]

3.1.15 measurement bias

estimate of a systematic measurement error

Note 1 to entry: A systematic error is a component of measurement error that in repeated measurements remains constant or varies in a predictable manner.

[SOURCE: ISO/IEC Guide 99:2007, 2.18, modified – Note 1 to entry has been added.]

3.1.16 reference plane

theoretical plane without thickness or tolerances

Note 1 to entry: The reference plane is used to define spaces in mechanical structures.

[SOURCE: IEC 60050-581:2008, 581-25-30]

3.1.17 channel

end-to-end transmission path connecting any two pieces of application-specific equipment

[SOURCE: ISO/IEC 11801-1:2017, 3.1.26]

3.2 Graphical symbols

The graphic symbols showed in Figure 1 and Figure 2 for different connection options have been adapted from IEC TR 61930.

NOTE 1 In Figure 1b and elsewhere in this document, the plugs are shown with different sizes to indicate directionality where the cabling has adapters pre-attached and the test cord does not, or vice versa. In Figure 1b, the plug on the left has the adapter pre-attached.

NOTE 2 Where used in all figures in this document, including those in the annexes, reference-grade terminations and adapters are shaded with grey.

NOTE 3 A simplified two-block connection used in Annex G is shown in Figure 1e.

NOTE 4 A simplified connection for pinned to unpinned and socketed connections used in Annex H is shown in Figure 1f.




Figure 1a – Socket and plug assembly




Figure 1b – Connector set (plug, adapter, plug)




Figure 1c – Light source




Figure 1d – Power meter




Figure 1e – Generic connection

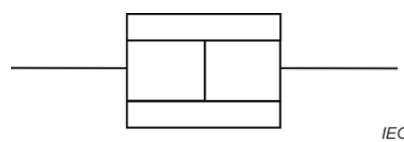


Figure 1f – Pinned/unpinned connection


Key

- | | | | |
|---|-----------------------|----|------------------------------------------|
| a | socket | d | plug inserted into plug-adapter assembly |
| b | plug | LS | light source |
| c | plug-adapter assembly | PM | power meter |

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Figure 1 – Connector symbols

In the figures that illustrate the measurement configurations in Annexes A through D and in Annex I, the cabling under test, illustrated by the loop, may contain splices, connectors or other passive components. Note that for purposes of measuring the attenuation of this cabling, the attenuation associated with the terminal connectors is considered separately from that of the cabling itself.

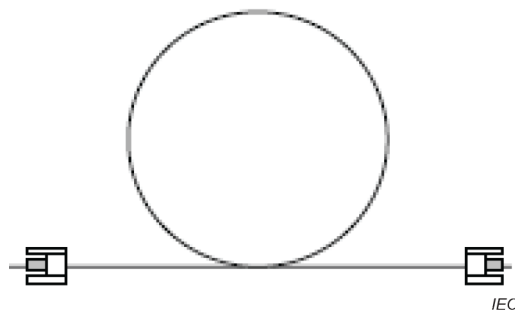

NOTE Cabling is shown with adapters pre-attached, and the plugs going into them are associated with reference-grade test cord plugs.

Figure 2 – Symbol for cabling under test