

# INTERNATIONAL STANDARD

## NORME INTERNATIONALE

Photovoltaic modules – Bypass diode – Thermal runaway test

Modules photovoltaïques – Diode de dérivation – Essai d'emballage thermique

[IEC 62979:2017](#)

<https://standards.iteh.ai/catalog/standards/sist/659fed41-17e7-49de-8b24-7d9bbd2f9953/iec-62979-2017>



## THIS PUBLICATION IS COPYRIGHT PROTECTED

Copyright © 2017 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Droits de reproduction réservés. Sauf indication contraire, aucune partie de cette publication ne peut être reproduite ni utilisée sous quelque forme que ce soit et par aucun procédé, électronique ou mécanique, y compris la photocopie et les microfilms, sans l'accord écrit de l'IEC ou du Comité national de l'IEC du pays du demandeur. Si vous avez des questions sur le copyright de l'IEC ou si vous désirez obtenir des droits supplémentaires sur cette publication, utilisez les coordonnées ci-après ou contactez le Comité national de l'IEC de votre pays de résidence.

IEC Central Office  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland

Tel.: +41 22 919 02 11  
[info@iec.ch](mailto:info@iec.ch)  
[www.iec.ch](http://www.iec.ch)

### About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

### About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

#### IEC publications search - [webstore.iec.ch/advsearchform](http://webstore.iec.ch/advsearchform)

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

#### IEC Just Published - [webstore.iec.ch/justpublished](http://webstore.iec.ch/justpublished)

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

#### IEC Customer Service Centre - [webstore.iec.ch/csc](http://webstore.iec.ch/csc)

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: [sales@iec.ch](mailto:sales@iec.ch).

#### Electropedia - [www.electropedia.org](http://www.electropedia.org)

The world's leading online dictionary on electrotechnology, containing more than 22,000 terminological entries in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

#### IEC Glossary - [std.iec.ch/glossary](http://std.iec.ch/glossary)

67,000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

### A propos de l'IEC

La Commission Electrotechnique Internationale (IEC) est la première organisation mondiale qui élabore et publie des Normes internationales pour tout ce qui a trait à l'électricité, à l'électronique et aux technologies apparentées.

### A propos des publications IEC

Le contenu technique des publications IEC est constamment revu. Veuillez vous assurer que vous possédez l'édition la plus récente, un corrigendum ou amendement peut avoir été publié.

#### Recherche de publications IEC -

[webstore.iec.ch/advsearchform](http://webstore.iec.ch/advsearchform)

La recherche avancée permet de trouver des publications IEC en utilisant différents critères (numéro de référence, texte, comité d'études,...). Elle donne aussi des informations sur les projets et les publications remplacées ou retirées.

#### IEC Just Published - [webstore.iec.ch/justpublished](http://webstore.iec.ch/justpublished)

Restez informé sur les nouvelles publications IEC. Just Published détaille les nouvelles publications parues. Disponible en ligne et une fois par mois par email.

#### Service Clients - [webstore.iec.ch/csc](http://webstore.iec.ch/csc)

Si vous désirez nous donner des commentaires sur cette publication ou si vous avez des questions contactez-nous: [sales@iec.ch](mailto:sales@iec.ch).

#### Electropedia - [www.electropedia.org](http://www.electropedia.org)

Le premier dictionnaire d'électrotechnologie en ligne au monde, avec plus de 22 000 articles terminologiques en anglais et en français, ainsi que les termes équivalents dans 16 langues additionnelles. Egalement appelé Vocabulaire Electrotechnique International (IEV) en ligne.

#### Glossaire IEC - [std.iec.ch/glossary](http://std.iec.ch/glossary)

67 000 entrées terminologiques électrotechniques, en anglais et en français, extraites des articles Termes et Définitions des publications IEC parues depuis 2002. Plus certaines entrées antérieures extraites des publications des CE 37, 77, 86 et CISPR de l'IEC.

# INTERNATIONAL STANDARD

## NORME INTERNATIONALE

---

Photovoltaic modules – Bypass diode – Thermal runaway test

Modules photovoltaïques – Diode de dérivation – Essai d'emballément thermique

[IEC 62979:2017](#)

<https://standards.iteh.ai/catalog/standards/sist/659fed41-17e7-49de-8b24-7d9bbd2f9953/iec-62979-2017>

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

COMMISSION  
ELECTROTECHNIQUE  
INTERNATIONALE

---

ICS 27.160

ISBN 978-2-8322-7291-6

|  |
|--|
| <p><b>Warning! Make sure that you obtained this publication from an authorized distributor.</b></p> <p><b>Attention! Veuillez vous assurer que vous avez obtenu cette publication via un distributeur agréé.</b></p> |
|--|

## CONTENTS

|  |    |
|--|----|
| CONTENTS .....   | 2  |
| FOREWORD .....   | 3  |
| INTRODUCTION .....   | 5  |
| 1 Scope .....  | 6  |
| 2 Normative references .....   | 6  |
| 3 Terms and definitions .....  | 6  |
| 4 Thermal runaway test .....   | 7  |
| 4.1 Diode thermal runaway .....  | 7  |
| 4.2 Test conditions .....  | 8  |
| 4.3 Preparation of test specimen .....   | 8  |
| 4.4 Test equipment .....   | 9  |
| 4.5 Test procedure .....   | 10 |
| 5 Pass or fail criteria .....  | 12 |
| 6 Test report .....  | 12 |
| Figure 1 – Illustration of how thermal runaway occurs .....                      | 7  |
| Figure 2 – Circuit for measurement of $T_{lead}$ and forward voltage .....       | 9  |
| Figure 3 – Circuit for flowing a forward current to the bypass diode .....       | 10 |
| Figure 4 – Circuit for applying a reverse bias voltage to the bypass diode ..... | 10 |
| Figure 5 – The typical pattern of thermal runaway .....                          | 11 |
| Figure 6 – The pattern of non-thermal runaway .....                              | 11 |

IEC 62979:2017  
<https://standards.iteh.ai/catalog/standards/sist/659fed41-17e7-49de-8b24-7d9bbd2f9953/iec-62979-2017>

## INTERNATIONAL ELECTROTECHNICAL COMMISSION

**PHOTOVOLTAIC MODULES – BYPASS DIODE –  
THERMAL RUNAWAY TEST****FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62979 has been prepared by IEC technical committee 82: Solar photovoltaic energy systems.

This bilingual version (2019-09) corresponds to the monolingual English version, published in 2017-08.

The text of this International Standard is based on the following documents:

| FDIS         | Report on voting |
|--------------|------------------|
| 82/1269/FDIS | 82/1311/RVD      |

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

The French version of this standard has not been voted upon.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

## **iTeh STANDARD PREVIEW** **(standards.iteh.ai)**

[IEC 62979:2017](https://standards.iteh.ai/catalog/standards/sist/659fed41-17e7-49de-8b24-7d9bbd2f9953/iec-62979-2017)

<https://standards.iteh.ai/catalog/standards/sist/659fed41-17e7-49de-8b24-7d9bbd2f9953/iec-62979-2017>

## INTRODUCTION

During the normal operation of PV modules the bypass diodes are reverse biased. When the PV module is partially shaded (for example by utility poles, buildings, or leaves), some of the cells in the PV module may not be able to produce the current being produced by the other cells in the series string. The shaded cells are then driven into reverse bias so the bypass diode of the shaded cell-string becomes forward bias protecting the shaded cells.

Under these circumstances, the temperature of the bypass diode increases due to the forward current flowing through the diode. It is in this condition that the diodes are tested in accordance with IEC 61215-2:2016, 4.18.1: Bypass diode thermal test. When the shade is removed, operating conditions return to normal and the bypass diode is again reversed biased.

Some of the diodes utilized as bypass diodes in PV modules have characteristics where the reverse bias leakage current increases with the diode temperature. So if the diode is already at an elevated temperature when reverse biased, there will be a substantial leakage current and the diode junction temperature can increase considerably. The worst case occurs when this heating exceeds the cooling capability of the junction box in which the diode is installed. As a result of this increasing temperature and leakage current, the diode can break down. These phenomena are called “thermal runaway”. The thermal design of the bypass diode in the junction box shall be verified to ensure that thermal runaway does not occur.

## iTeh STANDARD PREVIEW (standards.iteh.ai)

[IEC 62979:2017](https://standards.iteh.ai/catalog/standards/sist/659fed41-17e7-49de-8b24-7d9bbd2f9953/iec-62979-2017)

<https://standards.iteh.ai/catalog/standards/sist/659fed41-17e7-49de-8b24-7d9bbd2f9953/iec-62979-2017>

## PHOTOVOLTAIC MODULES – BYPASS DIODE – THERMAL RUNAWAY TEST

### 1 Scope

This document provides a method for evaluating whether a bypass diode as mounted in the module is susceptible to thermal runaway or if there is sufficient cooling for it to survive the transition from forward bias operation to reverse bias operation without overheating.

This test methodology is particularly suited for testing of Schottky barrier diodes, which have the characteristic of increasing leakage current as a function of reverse bias voltage at high temperature, making them more susceptible to thermal runaway.

The test specimens which employ P/N diodes as bypass diodes are exempted from the thermal runaway test required herein, because the capability of P/N diodes to withstand the reverse bias is sufficiently high.

### 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC TS 61836, *Solar photovoltaic energy systems – Terms, definitions and symbols*  
<https://standards.itec.ai/catalog/standards/sist/6591ed41-17c7-49dc-8024-7d9bbd2f9953/iec-62979-2017>

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC TS 61836 as well as the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

#### 3.1

##### **reverse current**

current flowing in the opposite direction to the polarity of the bypass diode

#### 3.2

##### **reverse bias voltage**

voltage applied to the opposite direction to the polarity of the bypass diode

#### 3.3

##### **$T_{\text{lead}}$**

temperature of the lead-wire of the bypass diode measured by thermocouple




## 4 Thermal runaway test

### 4.1 Diode thermal runaway

Some of the diodes utilized as bypass diodes in PV modules have characteristics where the reverse bias leakage current increases with the diode temperature. So if the diode is already at an elevated temperature when reverse biased, there may be a substantial reverse current and the diode junction temperature can increase considerably. The worst case occurs when this heating exceeds the cooling capability of the junction box in which the diode is installed. As a result of this increasing temperature and leakage current, the diode can break down. These phenomena are called “thermal runaway”. The thermal design of the bypass diode in the junction box shall be verified to ensure that thermal runaway does not occur.

How the thermal runaway does or does not occur is illustrated simply in Figure 1.

The curve R indicates the relation of the power injected by the reverse bias voltage versus the junction temperature. As shown, the power injected will rapidly increase at the higher junction temperature. The cooling capability of the junction box is indicated by the curve “Heat dissipation” and the critical temperature  $T_C$  is the crossing point of the curve R and the curve “Heat dissipation”.

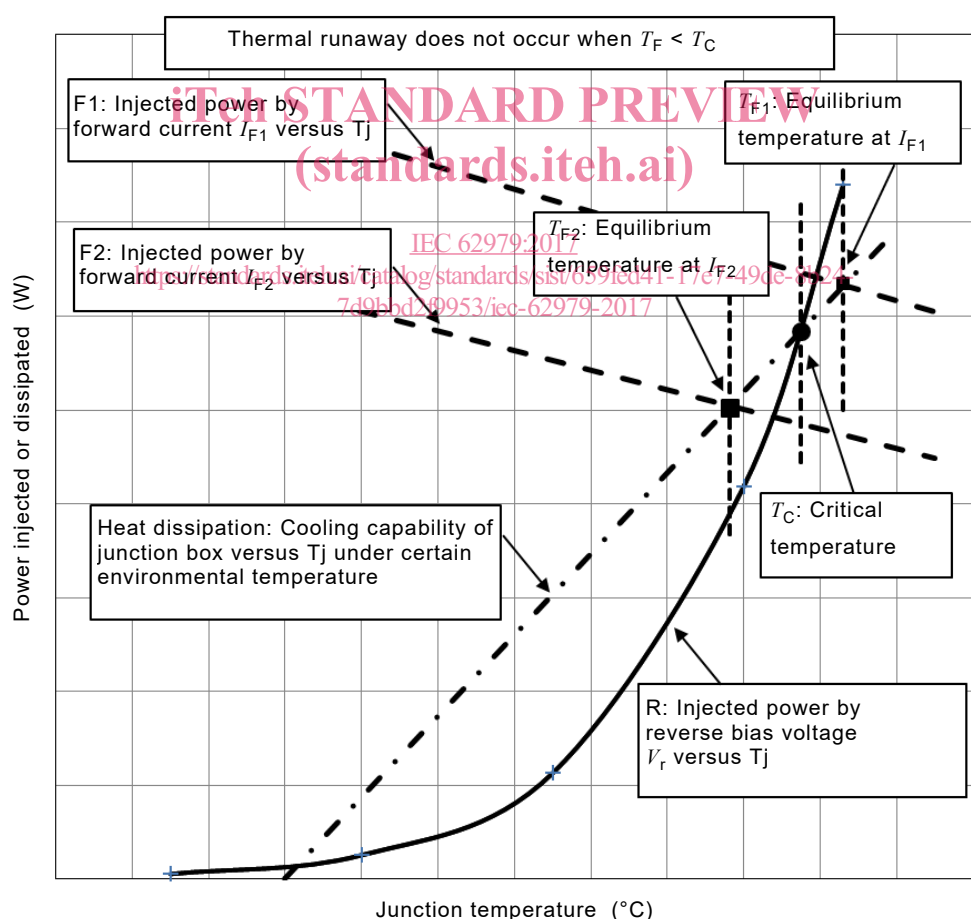

**Figure 1 – Illustration of how thermal runaway occurs**

If the reverse bias voltage is applied at a junction temperature higher than the critical temperature  $T_C$ , the injected power will be more than the cooling capability and the junction temperature will keep increasing until the diode undergoes thermal runaway.

On the other hand, if the reverse bias voltage is applied at a junction temperature lower than the critical temperature  $T_C$ , the injected power will be less than the cooling capability and the junction temperature will gradually decrease toward the environmental temperature.

The curves F1 and F2 show the relationship of the power injected by the forward current  $I_{F1}$  and  $I_{F2}$  versus the junction temperature. The crossing points of these curves and the cooling capability “Heat dissipation” show the equilibrium temperature when the forward current is applied.

The equilibrium temperature  $T_{F1}$  corresponding to the curve F1 is higher than  $T_C$  and the thermal runaway may occur when the diode is reverse biased. The equilibrium temperature  $T_{F2}$  corresponding to the curve F2 is lower than  $T_C$  and the thermal runaway will not occur when the diode is reverse biased.

## 4.2 Test conditions

The test conditions under which the thermal runaway test should be performed are as follows:

- a) Initial module temperature:  $(90 \pm 2) ^\circ\text{C}$ .

Modules that carry a label that says “For use in open rack mount only” may be tested at a reduced temperature of  $(75 \pm 2) ^\circ\text{C}$ .

As the occurrence of thermal runaway is related to the temperature at the instance of the reverse bias voltage application, the thermal runaway test is to be performed under the highest environmental temperature the module could encounter during the normal operation.

The module temperature may be measured by  $T_{\text{lead}}$ .

- b) Specified forward current:  $1,25 \times$  “Short circuit current ( $I_{SC}$ ) at STC” of the PV module for the bypass diode to be tested.
- c) Specified reverse bias voltage: Open circuit voltage ( $V_{OC}$ ) at STC of the cell string of the module protected by the bypass diode to be tested.

## 4.3 Preparation of test specimen

The test specimen should be the actual module or the special sample having the same construction of the actual module.

In order to perform the test by using a reasonable sized heat chamber, special samples may be used.

The special sample means the junction box including bypass diodes bonded by an adhesive onto a suitable glass-substrate laminated with the back-sheet in order to simulate the actual module.

Because the occurrence of thermal runaway depends upon cooling of the bypass diode, the test shall be performed with the diode mounted in the same way as in the actual module. The special sample may be provided by the module or junction box manufacturer.


In case an actual module is used, the cell strings should be electrically disconnected from the bypass diodes.

The test specimen shall be provided with the connection cables for the test module.

In order to measure  $T_{\text{lead}}$  and voltage of each bypass diode, connections of the lead-wires and thermocouples are required to be provided with the test specimen as shown in Figure 2.

Thermocouple should be mounted on the cathode lead as close as possible to the diode body.

Care should be taken to minimize any alteration of the properties of the diode or its heat transfer path.

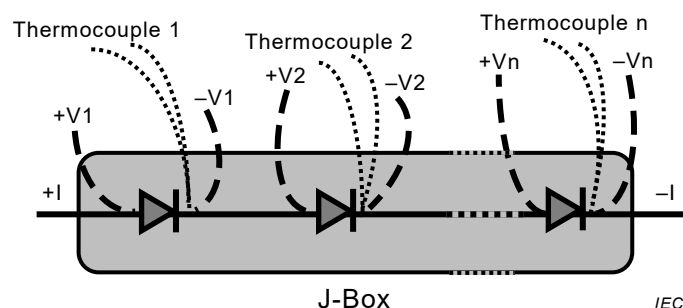

**Figure 2 – Circuit for measurement of  $T_{\text{lead}}$  and forward voltage**

#### 4.4 Test equipment

- Chamber for heating the module to a temperature of  $(90 \pm 2) ^\circ\text{C}$ .
- Means for monitoring the temperature of the chamber to an accuracy of  $\pm 2,0 ^\circ\text{C}$  and repeatability of  $\pm 0,5 ^\circ\text{C}$ .
- Thermocouples and means for recording the  $T_{\text{lead}}$  of the test specimen to an accuracy of  $\pm 1 ^\circ\text{C}$ .

Commonly used T-type thermocouple (copper-constantan) with soldering joint is permissible for this test, however it has a limitation since the highest measurable temperature is at  $200 ^\circ\text{C}$  to  $250 ^\circ\text{C}$ , which would be above the observed temperature  $T_C$  (critical temperature). When a thermal runaway occurs, the temperature will likely go up beyond the thermocouple limitation, but by measuring the reverse current flowing through the diode the thermal runaway phenomena will still be caught.

- Means for applying the forward current specified in 4.2 b). Means for monitoring the forward current through the module and the forward voltage of the diode selected for the test, throughout the test.
- Means for applying the reverse bias voltage specified in 4.2 c) to the bypass diode with capability of supplying the current equal to  $1,25 \times I_{\text{SC}}$  of the test module under the specified reverse voltage. Means for measuring the leakage current and the reverse voltage of the bypass diode.
- Means for making the swift switching (within 10 ms) from forward current injection to reverse bias voltage application as illustrated in the test circuit of Figure 3 and Figure 4.

The equipment shall be designed so that harmful voltage peaks are avoided.

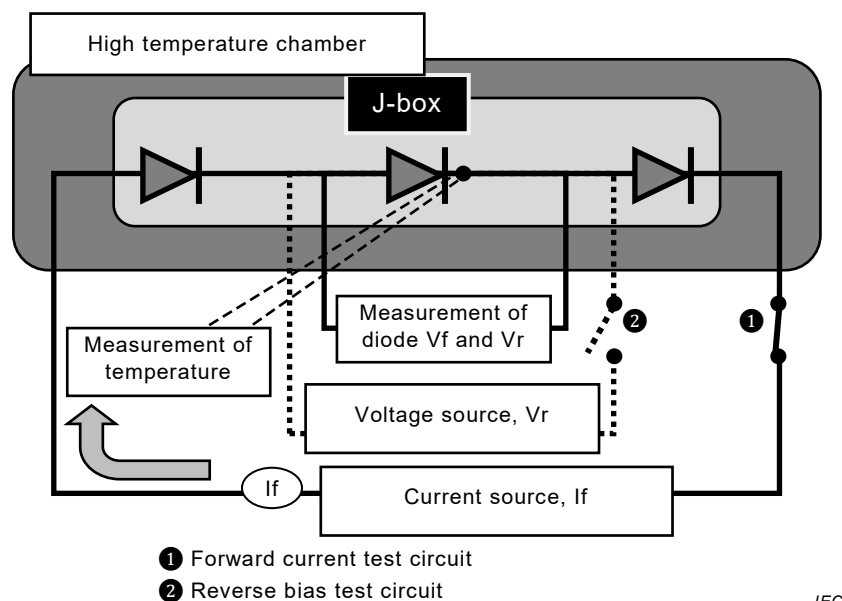


Figure 3 – Circuit for flowing a forward current to the bypass diode

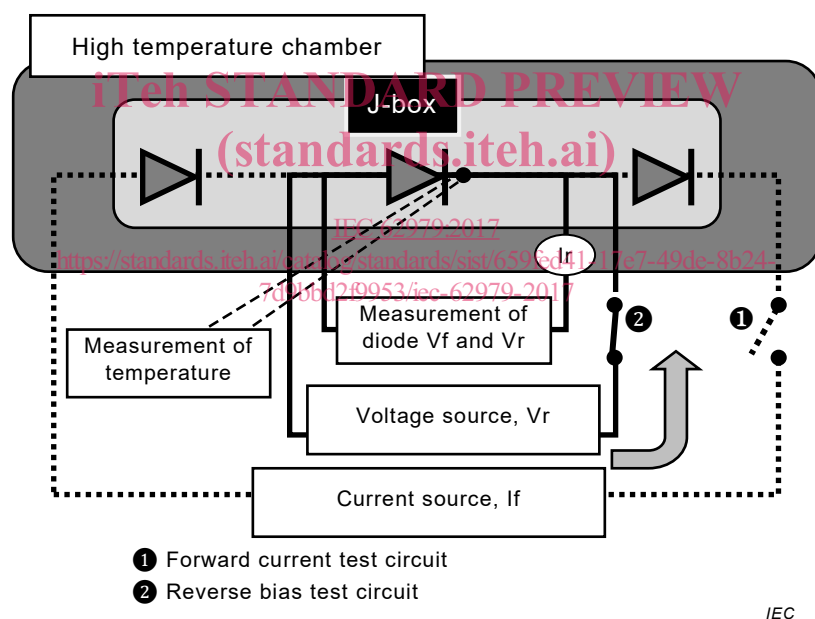


Figure 4 – Circuit for applying a reverse bias voltage to the bypass diode

#### 4.5 Test procedure

- To obtain initial characteristics of bypass diode and to make sure that bypass diode functions correctly, measure the reverse characteristic including reverse current at specified reverse voltage in 4.2 c) at room temperature ( $25 \pm 5$ ) °C.
- For the selection of the bypass diode to be tested, apply the specified forward current (4.2 b) to all the bypass diodes in series in the test specimen at ( $25 \pm 5$ ) °C. Select the bypass diode which shows the highest temperature. In case that the diodes are mounted somewhere else – like in the laminate and so on, the bypass diode having the highest temperature should be tested.
- After putting the test specimen(s) with necessary measuring and monitoring equipment into the test chamber, heat them to the initial module temperature specified in 4.2 a).

The consideration should be taken to minimize the effect of the air flow to the test specimen in the chamber.