

# INTERNATIONAL STANDARD

**Metallic cables and other passive components test methods –  
Part 4-6: Electromagnetic compatibility (EMC) – Surface transfer impedance –  
Line injection method**

[IEC 62153-4-6:2017](https://standards.iteh.ai/catalog/standards/sist/b08f927b-f893-4cd5-a29e-e2c6b8a20970/iec-62153-4-6-2017)

<https://standards.iteh.ai/catalog/standards/sist/b08f927b-f893-4cd5-a29e-e2c6b8a20970/iec-62153-4-6-2017>



**THIS PUBLICATION IS COPYRIGHT PROTECTED**  
**Copyright © 2017 IEC, Geneva, Switzerland**

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office  
3, rue de Varembe  
CH-1211 Geneva 20  
Switzerland

Tel.: +41 22 919 02 11  
Fax: +41 22 919 03 00  
[info@iec.ch](mailto:info@iec.ch)  
[www.iec.ch](http://www.iec.ch)

**About the IEC**

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

**About IEC publications**

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

**IEC Catalogue - [webstore.iec.ch/catalogue](http://webstore.iec.ch/catalogue)**

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

**Electropedia - [www.electropedia.org](http://www.electropedia.org)**

The world's leading online dictionary of electronic and electrical terms containing 20 000 terms and definitions in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

**IEC publications search - [www.iec.ch/searchpub](http://www.iec.ch/searchpub)**

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

**IEC Glossary - [std.iec.ch/glossary](http://std.iec.ch/glossary)**

65 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

**IEC Just Published - [webstore.iec.ch/justpublished](http://webstore.iec.ch/justpublished)**

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

**IEC Customer Service Centre - [webstore.iec.ch/csc](http://webstore.iec.ch/csc)**

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: [csc@iec.ch](mailto:csc@iec.ch).

IEC 62153-1:62017  
INTERNATIONAL STANDARD PREVIEW  
(standards.iteh.ai)  
<https://standards.iteh.ai/catalog/standards/sist/62153-1-62017>  
e2c6b8a20970/iec-62153-1-6-2017

# INTERNATIONAL STANDARD

---

**Metallic cables and other passive components test methods –  
Part 4-6: Electromagnetic compatibility (EMC) – Surface transfer impedance –  
Line injection method**

[IEC 62153-4-6:2017](https://standards.iteh.ai/catalog/standards/sist/b08f927b-f893-4cd5-a29e-e2c6b8a20970/iec-62153-4-6-2017)

<https://standards.iteh.ai/catalog/standards/sist/b08f927b-f893-4cd5-a29e-e2c6b8a20970/iec-62153-4-6-2017>

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

---

ICS 33.120.10

ISBN 978-2-8322-4748-8

**Warning! Make sure that you obtained this publication from an authorized distributor.**

## CONTENTS

FOREWORD.....	3
1 Scope.....	5
2 Normative references .....	5
3 Terms and definitions .....	5
4 Physical background.....	5
5 Test set-up .....	6
5.1 General.....	6
5.2 Equipment .....	7
5.3 Injection feature .....	7
5.4 Impedance of inner circuit.....	10
6 Preparation of the test sample .....	11
6.1 General.....	11
6.2 Sample length.....	12
6.3 Screened symmetrical cables.....	13
6.4 Screened multi-conductor cables .....	13
7 Measurement.....	13
7.1 General.....	13
7.2 Measurement precautions .....	14
7.2.1 Reduced primary current .....	14
7.2.2 Uncontrolled currents .....	14
7.2.3 Inhomogeneities of cable screens around the circumference .....	14
7.3 Calibration.....	14
7.4 Measuring procedure .....	15
7.5 Evaluation of the test results .....	17
8 Expression of test results .....	18
8.1 Expression.....	18
8.2 Normalised screening attenuation .....	18
8.3 Temperature correction.....	19
8.4 Test report .....	19
9 Requirement.....	19
Bibliography.....	20
Figure 1 – Complete installation.....	7
Figure 2 – Assembled injection feature for the transmission type line, Injection method – Parts list .....	8
Figure 3 – Upper part of injection feature – Position 1.....	9
Figure 4 – Lower part of injection feature – Position 2.....	9
Figure 5 – Impedance matching part of injection feature – Position 3.....	10
Figure 6 – Insert for adapting the different sizes of the cables under test – Position 4.....	10
Figure 7 – Preparation of the cable under test (CUT) .....	12
Figure 8 – Additional screening of connectors on the cable under test (CUT).....	12
Figure 9 – Preparation of symmetrical samples.....	13
Figure 10 – Calibration set-up.....	15
Figure 11 – Far end measuring set-up .....	16

## INTERNATIONAL ELECTROTECHNICAL COMMISSION

**METALLIC CABLES AND OTHER  
PASSIVE COMPONENTS TEST METHODS –****Part 4-6: Electromagnetic compatibility (EMC) –  
Surface transfer impedance – Line injection method**

## FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

International Standard IEC 62153-4-6 has been prepared by subcommittee 46A: Coaxial cables, of IEC technical committee 46: Cables, wires, waveguides, RF connectors, RF and microwave passive components and accessories cables, wires, waveguides, r.f. connectors and accessories for communication and signalling.

This second edition cancels and replaces the first edition, published in 2006.

The text of this International Standard is based on the following documents:

FDIS	Report on voting
46/650/FDIS	46/654/RVD

Full information on the voting for the approval of this International Standard can be found in the report on voting indicated in the above table.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts in the IEC 62153 series, published under the general title *Metallic communication cable test methods*, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under "<http://webstore.iec.ch>" in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

A bilingual version of this publication may be issued at a later date.

**ITEH STANDARD PREVIEW**  
**(standards.iteh.ai)**

[IEC 62153-4-6:2017](#)

<https://standards.iteh.ai/catalog/standards/sist/b08f927b-f893-4cd5-a29e-e2c6b8a20970/iec-62153-4-6-2017>

# METALLIC CABLES AND OTHER PASSIVE COMPONENTS TEST METHODS –

## Part 4-6: Electromagnetic compatibility (EMC) – Surface transfer impedance – Line injection method

### 1 Scope

This part of IEC 62153 determines the screening effectiveness of a shielded metallic communication cable by applying a well-defined current and voltage to the screen of the cable and measuring the induced voltage in order to determine the surface transfer impedance.

Measurements in the frequency range from a few kHz up to and above 1 GHz can be made with the use of normal high frequency instrumentation.

### 2 Normative references

There are no normative references in this document.

### 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

#### 3.1

##### inner circuit

circuit consisting of the conductor(s) and the screen of the CUT and is denoted by the subscript 2

#### 3.2

##### outer circuit (line injection circuit)

circuit consisting of the screen surface of CUT and the injection wire and is denoted by the subscript 1

#### 3.3

##### transfer impedance

$Z_T$

quotient of the longitudinal voltage induced in the inner circuit of the electrically short cable under test to the current in the outer circuit (line injection circuit) – or vice versa – related to unit length

### 4 Physical background

One important element in the determination of the screening effectiveness of cables is the transfer impedance  $Z_T$  of its screen.

Most cables have a negligible capacitive coupling. But for loose single braided cables, capacitive coupling cannot be neglected. The coupling through the holes in the screen is described in terms of the through capacitance  $C_T$  or the capacitive coupling admittance  $Y_C$ . For an electrically short uniform cable,  $Y_C$  is defined as the quotient of the current induced in the inner circuit to the voltage developed in the outer circuit – formed by the screen under test and the injection wire – or vice versa related to the unit length.

In case of a non negligible capacitive coupling, the screening effectiveness is described by the equivalent transfer impedance  $Z_{TE}$ :

$$Z_{TE} = \max|Z_F \pm Z_T| \quad (1)$$

$$Z_F = j\omega C_T Z_1 Z_2 = Y_C Z_1 Z_2 \quad (2)$$

where

$\omega$	is the radian frequency;
$\pm$	+ refers to near end, – refers to far end measurement;
$C_T$	is the through capacitance;
$Y_C$	is the capacitive coupling admittance;
$Z_1$	is the characteristic impedance of the outer circuit (line injection circuit);
$Z_2$	is the characteristic impedance of the inner circuit (cable under test);
$Z_F$	is the capacitive coupling impedance;
$Z_T$	is the transfer impedance;
$Z_{TE}$	is the equivalent transfer impedance.

For more information, see the respective parts of IEC 62153-4-1.


## 5 Test set-up

### 5.1 General

As shown in Figure 1, the injection circuit is constructed as a transmission line using one or more parallel wires, a corrugated ribbon cable or a flat copper braid with the outer conductor of the cable under test. The injection circuit is connected to the coaxial line at each end via an injection feature. The injection wire shall be fitted tightly to the cable sample along the coupling length (e.g. with an adhesive tape). The characteristic impedance of the injection circuit shall be equal to the generator output resistance and the load resistance  $R_1$ ; this is achieved by choosing an appropriate conductor size and the type of insulation of the injection wire.

The reflection coefficient of the injection feature and the injection circuit along the coupling length shall be less than 0,1 related to the generator output resistance, i.e. the return loss should be higher than 20 dB.



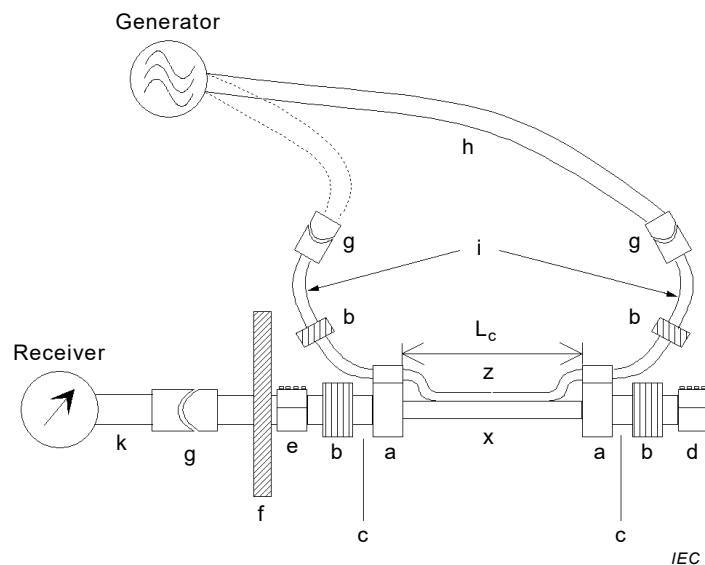

- a injection feature
- b ferrite
- c brass/copper tube for additional screening
- d screening box for the matching resistor of the cable under test
- e screening box for connecting the cable under test to the receiver
- f screened-room wall with screened coaxial feed-through (if needed)
- g connector (SMA, N, etc.)
- h feeding cable from the generator
- i feeding cables for injection wire
- k connecting cable to receiver
- x cable under test
- z injection line
- $L_c$  coupling length

**Figure 1 – Complete installation**

## 5.2 Equipment


The measuring equipment consists of

- a) a vector network analyser or alternatively
  - a signal generator with the same characteristic impedance as the line injection circuit and with a power amplifier if necessary for very low transfer impedance,
  - a receiver with a calibrated step attenuator and complemented with a low noise amplifier for very low transfer impedance,
- b) a time domain reflectometer (TDR) with a rise time of less than 350 ps or vector network analyser (at least 3 GHz) performing a return loss measurement transformed into the time domain.

## 5.3 Injection feature

The design of the injection features is adjusted to allow an optimum matching of the symmetrical TEM in the coaxial feeding and terminating cables to the asymmetrical field along the parallel line whilst maintaining good mechanical strength for repeated use. Details of a possible injection features are given in Figure 2 to Figure 6 (the figures are related for a coaxial cable connection of RG223). Fine tuning of the discontinuity can be made by varying the foam insert, item 8 of Figure 2.

Alternatively, a suitable injection features can be made with a small connector (solder spill type) strapped to the CUT, or more easily by strapping the outer conductor of a small coaxial cable of appropriate characteristic impedance to the bared sheath of the CUT. In the test section itself, the centre conductor of the coaxial cable is continued using two or four parallel wires, corrugated ribbon cable or flat copper braid. Fine tuning of an injection feature discontinuity can be achieved by strapping the joint and the injection wire more closely onto the sheath of the CUT in the test section.

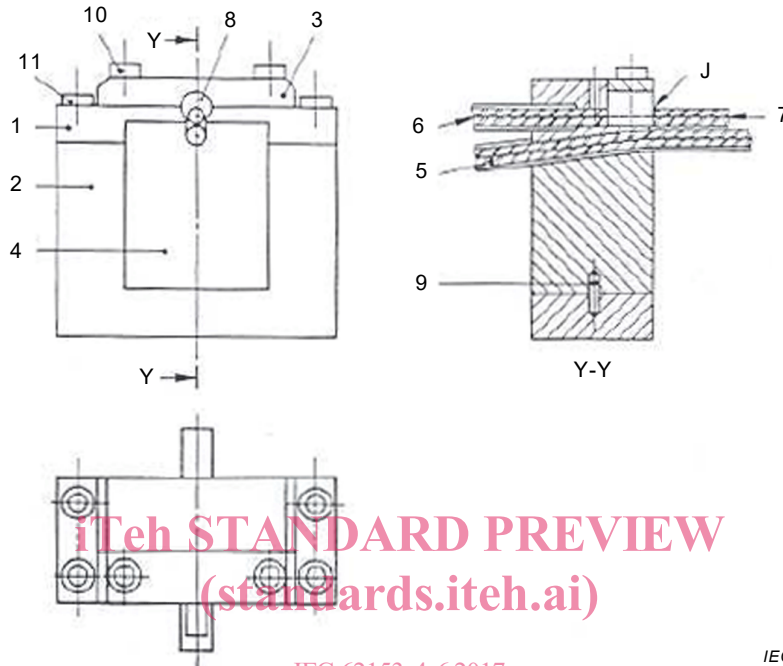

IEC 62153-4-6:2017

IEC

<https://standards.iteh.ai/catalog/standards/sist/b08927b-f893-4cd5-a29e-e2c6b8a20970/iec-62153-4-6-2017>

Quantity	Part	Pos.	Remarks, material
4	Metric screw M3 x 10mm	11	
2	Metric screw M3 x 6mm	10	
1	Pin: dia. 2mm length 8mm	9	
1	Foam dielectric	8	$\epsilon_r$ close to 1
1	Injection wire	7	
1	50 $\Omega$ coaxial cable	6	Impedance as required
1	Cable under test (CUT)	5	
1	Insert for CUT	4	Brass
1	Impedance matching part	3	Brass
1	Lower part	2	Brass
1	Upper part	1	Brass
	Test injection feature (two required)		

**Figure 2 – Assembled injection feature for the transmission type line, Injection method – Parts list**

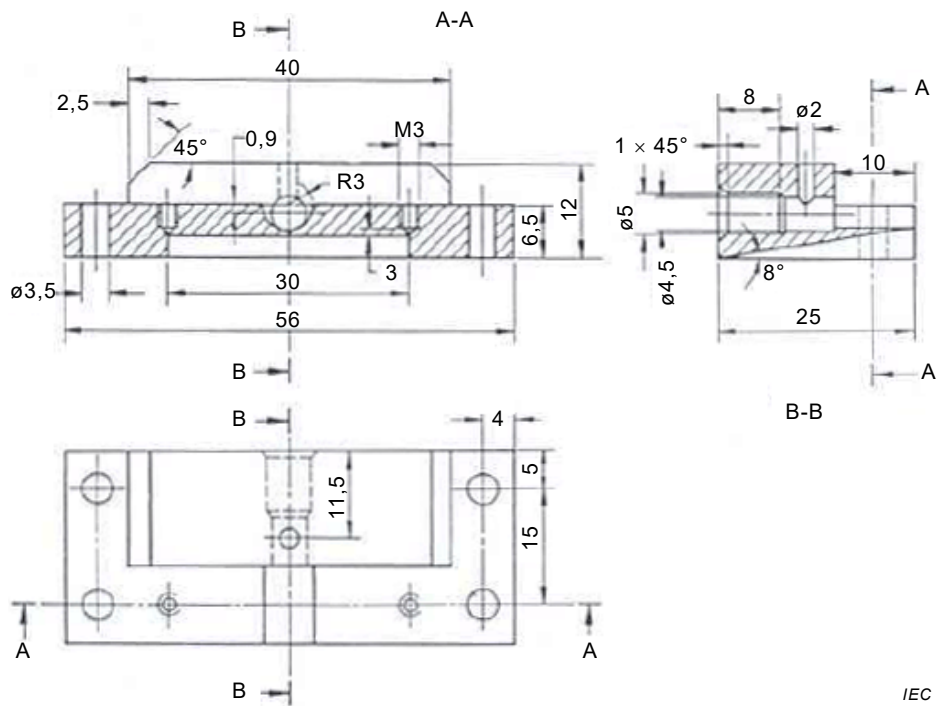


Figure 3 – Upper part of injection feature – Position 1

STANDARD PREVIEW  
(standards.iteh.ai)

<https://standards.iteh.ai/catalog/standards/sist/b08f927b-f893-4cd5-a29e-62c6b8a20970/iec-62153-4-6-2017>

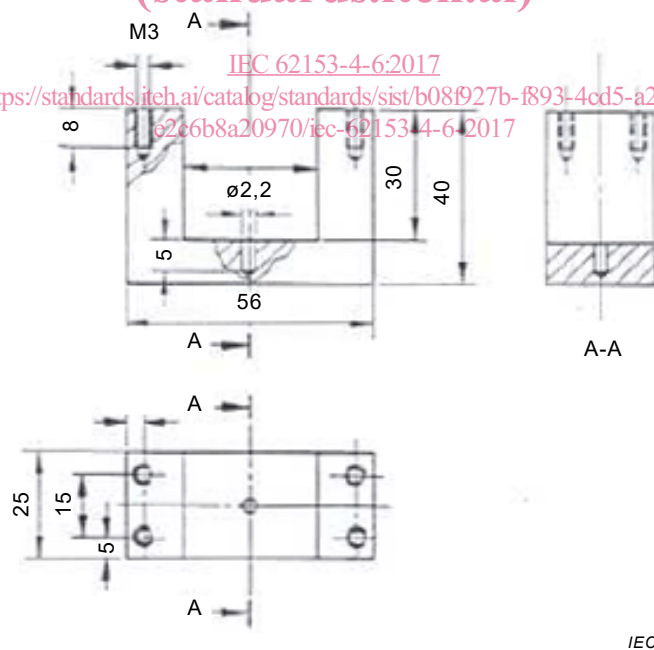


Figure 4 – Lower part of injection feature – Position 2