

INTERNATIONAL STANDARD



**Metallic communication cable test methods –
Part 4-9: Electromagnetic compatibility (EMC) – Coupling attenuation of
screened balanced cables, triaxial method**

IEC 62153-4-9:2018

<https://standards.iteh.ai/catalog/standards/sist/b58d6fc8-2998-4b1b-bd2c-870dc0ef8df8/iec-62153-4-9-2018>



THIS PUBLICATION IS COPYRIGHT PROTECTED
Copyright © 2020 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office
3, rue de Varembe
CH-1211 Geneva 20
Switzerland

Tel.: +41 22 919 02 11
info@iec.ch
www.iec.ch

About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

Electropedia - www.electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 000 terminological entries in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

IEC Glossary - std.iec.ch/glossary

67 000 electrotechnical terminology entries in English and French extracted from the Terms and definitions clause of IEC publications issued between 2002 and 2015. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

[IEC 62153-4-9-2018](https://standards.iteh.ai/catalog/standards/sist/b58d6fc8-2998-4b1b-bd2c-870dc0ef8df8/iec-62153-4-9-2018)

<https://standards.iteh.ai/catalog/standards/sist/b58d6fc8-2998-4b1b-bd2c-870dc0ef8df8/iec-62153-4-9-2018>



IEC 62153-4-9

Edition 2.1 2020-07
CONSOLIDATED VERSION

INTERNATIONAL STANDARD



**Metallic communication cable test methods –
Part 4-9: Electromagnetic compatibility (EMC) – Coupling attenuation of
screened balanced cables, triaxial method**

[IEC 62153-4-9:2018](https://standards.iteh.ai/catalog/standards/sist/b58d6fc8-2998-4b1b-bd2c-870dc0ef8df8/iec-62153-4-9-2018)

<https://standards.iteh.ai/catalog/standards/sist/b58d6fc8-2998-4b1b-bd2c-870dc0ef8df8/iec-62153-4-9-2018>

INTERNATIONAL
ELECTROTECHNICAL
COMMISSION

ICS 33.100.10; 33.120.10

ISBN 978-2-8322-8633-3

Warning! Make sure that you obtained this publication from an authorized distributor.

REDLINE VERSION



**Metallic communication cable test methods –
Part 4-9: Electromagnetic compatibility (EMC) – Coupling attenuation of
screened balanced cables, triaxial method**

IEC 62153-4-9:2018

<https://standards.iteh.ai/catalog/standards/sist/b58d6fc8-2998-4b1b-bd2c-870dc0ef8df8/iec-62153-4-9-2018>

CONTENTS

FOREWORD	4
INTRODUCTION to Amendment 1	6
1 Scope	7
2 Normative references	7
3 Terms, definitions and symbols	7
4 Principle of the measuring method	9
4.1 General	9
4.2 Procedure A: measuring with standard tube (standard head)	10
4.3 Procedure B: measuring with open head	11
5 Screening parameters	12
5.1 General	12
5.2 Transfer impedance	12
5.3 Screening attenuation	12
5.4 Unbalance attenuation	13
5.5 Coupling attenuation	13
6 Measurement	14
6.1 General	14
6.2 Equipment	14
6.3 Balun requirements	14
6.4 TP-connecting unit requirements	15
6.5 Sample preparation	15
6.6 Procedure	16
6.7 Test length	16
6.8 Measurement precautions	17
7 Expression of results	17
7.1 Procedure A: measuring with a standard head	17
7.2 Procedure B: measuring with an open head	17
8 Test report	18
9 Requirements	18
10 Plots of coupling attenuation versus frequency (typical results)	19
Annex A (normative) Insertion loss of absorber with triaxial set-up	21
Annex B (informative) Physical background	23
B.1 Unbalance attenuation a_U	23
B.2 Screening attenuation a_S	24
B.3 Coupling attenuation a_C	24
Annex C (informative) Mixed mode parameters	26
C.1 Definition of mixed mode S-Parameters	26
C.2 Reference impedance of VNA	28
Annex D (normative) Measuring the screening effectiveness of unscreened single or multiple balanced pairs	29
D.1 General	29
D.2 Background	29
D.3 Triaxial set-up for unscreened balanced pairs	29
D.4 Unscreened single pairs	30

D.5	Screening- and coupling attenuation measurement of multiple unscreened balanced pairs	31
D.6	Measurement	32
D.7	Expression of test results	32
D.8	Low frequency coupling attenuation	32
D.9	Set-up verification and measurement uncertainties	33
	Bibliography	35

Figure 1	– Coupling attenuation, principle test set-up with balun and standard tube	9
Figure 2	– Coupling attenuation, principle test set-up with balun and open head	10
Figure 3	– Coupling attenuation, principle set-up with multiport VNA and standard head	11
Figure 4	– Coupling attenuation, principle set-up with multiport VNA and open head	11
Figure 5	– Definition of transfer impedance	12
Figure 6	– Termination of the cable under test with balun feeding	16
Figure 7	– Test set-up to measure a_{tube}	18
Figure 8	– Coupling attenuation Twinax 105, open head procedure	19
Figure 9	– Coupling attenuation Cat 7a, standard head procedure	19
Figure 10	– Coupling attenuation Cat 8.2, open head procedure	20
Figure A.1	– Insertion loss of absorber with triaxial set-up	21
Figure A.2	– Insertion loss of absorber with triaxial set-up	21
Figure C.1	– Common two-port network	26
Figure C.2	– Common four port network	26
Figure C.3	– Physical and logical ports of VNA	27
Figure C.4	– Nomenclature of mixed mode S-Parameters	27
Figure C.5	– Measurement configuration, single ended response	28
Figure C.6	– Measurement configuration, differential mode response	28
Figure D.1	– Basic triaxial tube procedure according to IEC 62153-4-3 / IEC 62153-4-4	29
Figure D.2	– Screening effectiveness of unscreened balanced pairs, principle set-up	30
Figure D.3	– Configuration for near end coupling measurement of an unscreened single pair, principle set-up	31
Figure D.4	– Far end screening attenuation and coupling attenuation ($S_{\text{sc}21}$ and $S_{\text{sd}21}$) of an unscreened balanced pair, principle set-up	31
Figure D.5	– Basic configuration of screening attenuation and coupling attenuation test of multiple unscreened balanced pairs	32
Figure D.6	– Low frequency coupling attenuation $a_{\text{C},\text{lf}}$ of a single screened and unscreened balanced pair, 3 m	33
Figure D.7	– Reflected mode conversion parameter $S_{\text{cd}11}$ with a TP-connecting unit having an open loop	34
Table 1	– Balun performance characteristics (1 MHz to 1 GHz)	15
Table 2	– TP-connecting unit performance characteristics (1 MHz to 2 GHz)	15

INTERNATIONAL ELECTROTECHNICAL COMMISSION

METALLIC COMMUNICATION CABLE TEST METHODS –

Part 4-9: Electromagnetic compatibility (EMC) – Coupling attenuation of screened balanced cables, triaxial method

FOREWORD

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as “IEC Publication(s)”). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the International Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as nearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) Attention is drawn to the possibility that some of the elements of this IEC Publication may be the subject of patent rights. IEC shall not be held responsible for identifying any or all such patent rights.

This consolidated version of the official IEC Standard and its amendment has been prepared for user convenience.

IEC 62153-4-9 edition 2.1 contains the second edition (2018-05) [documents 46/681/FDIS and 46/685/RVD] and its amendment 1 (2020-07) [documents 46/773/FDIS and 46/776/RVD].

In this Redline version, a vertical line in the margin shows where the technical content is modified by amendment 1. Additions are in green text, deletions are in strikethrough red text. A separate Final version with all changes accepted is available in this publication.

International Standard IEC 62153-4-9 has been prepared by IEC technical committee 46: Cables, wires, waveguides, RF connectors, RF and microwave passive components and accessories.

This second edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- two test procedures, open head and standard head procedure;
- measuring with balun or with multipoint respectively mixed mode VNA;
- extension of frequency range up to and above 2 GHz.

This document has been drafted in accordance with the ISO/IEC Directives, Part 2.

A list of all parts of the IEC 62153 series can be found, under the general title *Metallic communication cable test methods*, on the IEC website.

The committee has decided that the contents of the base publication and its amendment will remain unchanged until the stability date indicated on the IEC web site under "<http://webstore.iec.ch>" in the data related to the specific publication. At this date, the publication will be

- reconfirmed,
- withdrawn,
- replaced by a revised edition, or
- amended.

IEC 62153-4-9:2018

IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

INTRODUCTION to Amendment 1

The goal of this amendment is to extent IEC 62153-4-9 such that also the coupling attenuation of unscreened single or multiple balanced pairs or unscreened quads can be measured with the triaxial test procedure.

Further complement is the extension of the usable frequency range down to frequencies below 9 kHz to measure the low frequency coupling attenuation of screened and unscreened balanced pairs or quads.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[IEC 62153-4-9:2018](https://standards.iteh.ai/catalog/standards/sist/b58d6fc8-2998-4b1b-bd2c-870dc0ef8df8/iec-62153-4-9-2018)

<https://standards.iteh.ai/catalog/standards/sist/b58d6fc8-2998-4b1b-bd2c-870dc0ef8df8/iec-62153-4-9-2018>

METALLIC COMMUNICATION CABLE TEST METHODS –

Part 4-9: Electromagnetic compatibility (EMC) – Coupling attenuation of screened balanced cables, triaxial method

1 Scope

This part of IEC 62153 applies to metallic communication cables. It specifies a test method for determining the coupling attenuation a_C of screened balanced cables. Due to the concentric outer tube, measurements are independent of irregularities on the circumference and external electromagnetic fields.

A wide dynamic and frequency range can be applied to test even super screened cables with normal instrumentation from low frequencies up to the limit of defined transversal waves in the outer circuit at approximately 4 GHz. However, when using a balun, the upper frequency is limited by the properties of the balun.

Measurements can be performed with standard tube procedure (respectively with standard test head) according to IEC 62153-4-4 or with open tube (open test head) procedure.

The procedure described herein to measure the coupling attenuation a_C is based on the procedure to measure the screening attenuation a_S according to IEC 62153-4-4.

2 Normative references

[IEC 62153-4-9:2018](#)

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 60050-726, *International Electrotechnical Vocabulary – Chapter 726: Transmission lines and waveguides*

IEC TS 62153-4-1, *Metallic communication cable test methods – Part 4-1: Electromagnetic compatibility (EMC) – Introduction to electromagnetic screening measurements*

IEC 62153-4-3, *Metallic communication cable test methods – Part 4-3: Electromagnetic compatibility (EMC) – Surface transfer impedance – Triaxial method*

IEC 62153-4-4, *Metallic communication cable test methods – Part 4-4: Electromagnetic compatibility (EMC) – Test method for measuring of the screening attenuation as up to and above 3 GHz, triaxial method*

IEC 62153-4-5, *Metallic communication cables test methods – Part 4-5: Electromagnetic compatibility (EMC) – Coupling or screening attenuation – Absorbing clamp method*

3 Terms, definitions and symbols

For the purposes of this document, the terms and definitions given in IEC 60050-726, IEC TS 62153-4-1 and IEC 62153-4-4, as well as the following symbols apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

a_s is the screening attenuation which is comparable to the results of the absorbing clamp method in dB;

a_c is the coupling attenuation related to the radiating impedance of 150 Ω in dB;

a_u is the unbalanced attenuation;

$a_{m,min}$ is the attenuation recorded as minimum envelope curve of the measured values in dB;

a_z is the additional attenuation of a possible inserted adapter, if not otherwise eliminated e.g. by the calibration, in dB;

C_T is the through capacitance of the outer conductor in F/m;

c_0 is the vacuum velocity in m/s;

dx is the differential length operator of integration;

λ_0 is the vacuum wavelength in m;

ε_{r1} is the relative dielectric permittivity of the cable under test;

ε_{r2} is the relative dielectric permittivity of the secondary circuit;

$\varepsilon_{r2,n}$ is a normalised value of the relative dielectric permittivity of the environment of the cable;

f is the frequency in Hz; (standards.iteh.ai)

j is the imaginary operator (square root of minus one);

L is the transmission line parameter-inductance; 8

l is the effective coupling length in m; <https://standards.iteh.ai/catalog/standards/iec-62153-4-9-2018/b58d6fe8-2998-4b1b-bd2c-870dc0ef8df8/iec-62153-4-9-2018>

φ is a phase factor in the ratio of the secondary to primary circuit end voltages (U_1/U_2);

P_1 is the feeding power of the primary circuit in W;

P_2 is the measured power received on the input impedance;

R of the receiver in the secondary circuit in W;

P_r is the radiated power in the environment of the cable, which is comparable to $P_{2n} + P_{2f}$ of the absorbing clamp method in W;

$P_{r,max}$ is the periodic maximum value of the common mode radiated power in W;

P_s is the radiated power in the normalised environment of the cable under test, ($Z_s = 150 \Omega$ and $|\Delta v / v_1| = 10 \%$) in W,

$$\varphi_1 = 2\pi \times (\sqrt{\varepsilon_{r1}} - \sqrt{\varepsilon_{r2}}) \times l / \lambda_0 \quad (1)$$

$$\varphi_2 = 2\pi \times (\sqrt{\varepsilon_{r1}} + \sqrt{\varepsilon_{r2}}) \times l / \lambda_0 \quad (2)$$

$$\varphi_3 = \varphi_2 - \varphi_1 = 4\pi \times \sqrt{\varepsilon_{r2}} \times l / \lambda_0 \quad (3)$$

R is the input impedance of the receiver in Ω ;

R_{DM} is the differential mode termination, Ω ;

S is the summing function;

T is the coupling transfer function;

U_1 is the input voltage of the primary circuit formed by the cable in V;

U_2 is the output voltage of the secondary circuit in V;

- Ω is the radian frequency ω ;
- Z_1 is the (differential mode) characteristic impedance of the cable under test (primary circuit) in Ω ;
- Z_2 is the characteristic impedance of the secondary circuit in Ω ;
- Z_{com} is the common mode (unbalanced);
- Z_{diff} is the nominal characteristic impedance of the differential mode (balanced);
- Z_F is the capacitive coupling impedance of the cable under test in Ω/m ,

$$Z_F = Z_1 \cdot Z_2 \cdot j \cdot 2 \cdot \pi \cdot f \cdot C_T \quad (4)$$

- Z_S is the normalised value of the characteristic impedance of the environment of the cable;
- Z_T is the transfer impedance of the cable under test in Ω/m ;

4 Principle of the measuring method

4.1 General

Coupling attenuation of screened balanced cables describes the overall effect against electromagnetic interference (EMI) taking into account both the unbalance attenuation of the pair and the screening attenuation of the screen.

The disturbing circuit (the inner or primary circuit) consists of the test cable which is fed by a generator and is impedance-matched at the near and far ends. The disturbed circuit (the outer or secondary circuit) is formed by the solid metallic tube and the short section of the cable under test covered by the tube. The disturbed circuit (the outer or secondary circuit) is terminated at the near end in a short circuit and is terminated at the far end with a calibrated receiver or network analyser.

The voltage peaks at the far end of the secondary circuit are measured with a calibrated receiver or network analyser. For this measurement a matched receiver is not necessary. These voltage peaks are not dependant on the input impedance of the receiver, provided that the input impedance of the receiver is lower than the characteristic impedance of the secondary circuit. However, it is advantageous to have a low mismatch, for example by selecting a range of tube diameters for several cable sizes.

To measure the coupling attenuation as well as to measure the unbalance attenuation a differential signal is required. This can, for example, be generated using a balun which converts the unbalanced signal of a 50 Ω network analyser into a balanced signal.

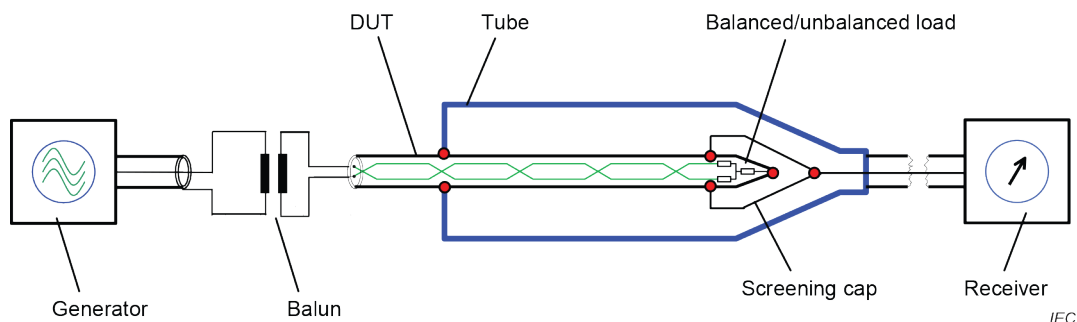


Figure 1 – Coupling attenuation, principle test set-up with balun and standard tube

Alternatively, a balanced signal may be obtained by using a vector network analyser (VNA) having two generators with a phase shift of 180° . Another alternative is to measure with a multi-port VNA (virtual balun). The properties of balanced pairs are determined mathematically from the measured values of each single conductor of the pair against reference ground. The coverable frequency range for the determination of the reflection and transmissions characteristics of symmetrical pairs is no longer limited by the balun but by the VNA and the connection technique.

A detailed definition of mixed mode S-parameters for measurements with virtual balun is given in Annex B.

The test set-up (see Figures 1, 2, 3 and 4) is a triaxial system consisting of an outer solid metallic tube in which the cable under test (CUT) is concentrically positioned.

At the near end, the screen of the screened cable under test is short circuited with the solid metallic tube.

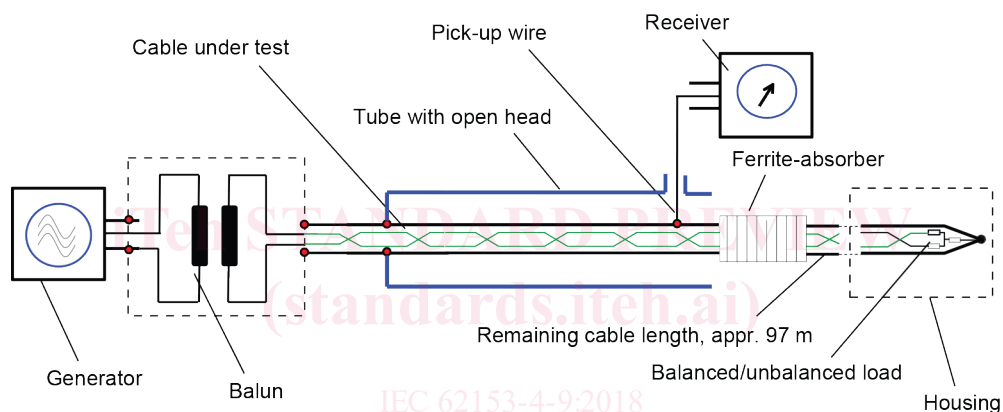


Figure 2 – Coupling attenuation, principle test set-up with balun and open head

At the far end, the tube can be equipped with a “test head” which can be removed from the tube for easier connecting of the CUT. The set-up according to IEC 62153-4-4 is designated as the standard procedure, respectively the procedure with standard head. The advantage is an overall closed and shielded set-up.

Alternatively, the tube can be equipped with an open head at the far end (see Figures 2 and 4).

4.2 Procedure A: measuring with standard tube (standard head)

The set-up detailed in Procedure A uses the standard test-head and is in principle the same as described in IEC 62153-4-4. The screened balanced DUT can be fed either in common mode or in differential mode. In this way, both, screening attenuation of the screen or coupling attenuation of the screened pair can be measured. In principle, with the same set-up, also the transfer impedance of the screen can be measured (taking into account the length of the DUT).

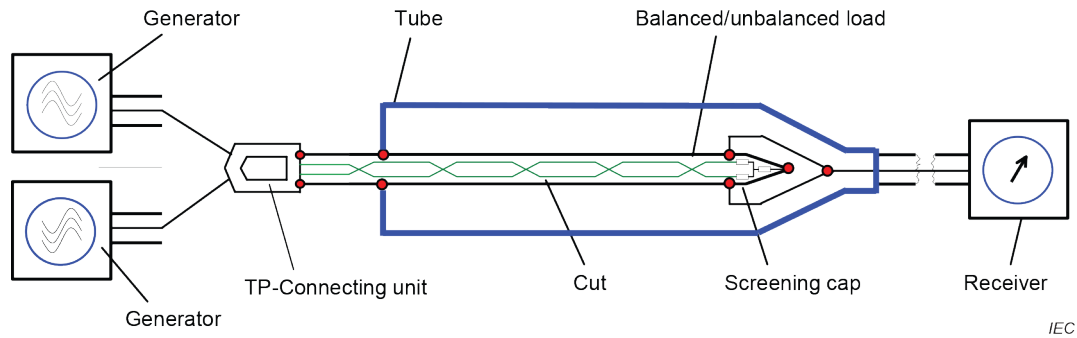


Figure 3 – Coupling attenuation, principle set-up with multiport VNA and standard head

The DUT shall be matched at the far end in common and differential mode. Return loss of the CUT in common and differential mode shall be measured. Values for return loss in common and differential mode shall be at least 10 dB.

4.3 Procedure B: measuring with open head

In case of measuring with open head the first several meters of a longer length of the cable to be tested are concentrically positioned in an outer solid metallic tube. The remaining length (usually of 100 m length) that extends past the tube is placed in a highly shielded box and terminated with common mode and differential mode terminations (see Figure 6). The cable screen shall be connected with low impedance to the screened box. The center point of the differential mode termination shall be connected via the resistor R_{CM} to the highly screened box or cable screen (see Figure 6).

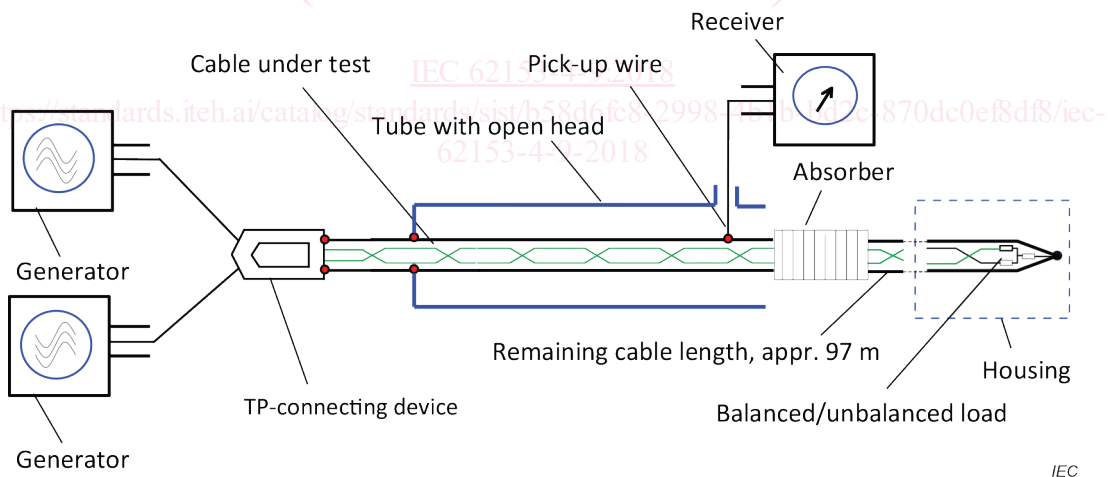


Figure 4 – Coupling attenuation, principle set-up with multiport VNA and open head

At the near end, the screen of the screened cable under test is short circuited with the solid metallic tube.

At the far end, the tube is let open and the signal is picked up by a “pick up wire”, which is connected to the screen of the cable under test (see Figure 4). The open tube system can also be equipped with a “test head” which can be removed from the tube for easier connecting of the CUT.

At the open end of the tube, absorbers shall be applied to match the system and to avoid back travelling waves into the system. The attenuation of the absorber shall be at least 20 dB. A combination of a ferrite absorber and/or nanocrystalline absorber may be used. A procedure to measure the attenuation of absorbers is given in Annex A.