



SLOVENSKI STANDARD

SIST ETS 300 417-1-1 E1:2003

01-december-2003

Prenos in multipleksiranje (TM) i GeneriĹ ne funkcijske zahteve za opremo v sinhroni digitalni hierarhiji (SDH) i 1-1. del: Osnovni procesi in lastnosti

Transmission and Multiplexing (TM); Generic functional requirements for Synchronous Digital Hierarchy (SDH) equipment; Part 1-1: Generic processes and performance

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Ta slovenski standard je istoveten z: ETS 300 417-1-1 Edition 1

SIST ETS 300 417-1-1 E1:2003
<https://standards.iteh.ai/catalog/standards/sist/555514d7-7a0a-46c2-85ef-2ec1fc722cc5/sist-ets-300-417-1-1-e1-2003>

ICS:

33.040.20

Prenosni sistem

Transmission systems


SIST ETS 300 417-1-1 E1:2003

en

iTeh STANDARD PREVIEW **(standards.iteh.ai)**

[SIST ETS 300 417-1-1 E1:2003](https://standards.iteh.ai/catalog/standards/sist/535314d7-7a0a-46c2-85ef-2ec1fc722cc5/sist-ets-300-417-1-1-e1-2003)

<https://standards.iteh.ai/catalog/standards/sist/535314d7-7a0a-46c2-85ef-2ec1fc722cc5/sist-ets-300-417-1-1-e1-2003>

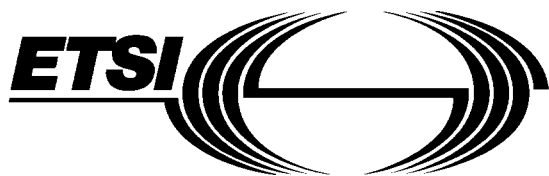

EUROPEAN
TELECOMMUNICATION
STANDARD

ETS 300 417-1-1

January 1996

Source: ETSI TC-TM

Reference: DE/TM-01015-1-1

ICS: 33.020

Key words: SDH, transmission, equipment, performance

**Transmission and Multiplexing (TM);
Generic functional requirements for
Synchronous Digital Hierarchy (SDH) equipment;
Part 1-1: Generic processes and performance**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1996. All rights reserved.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 417-1-1 E1:2003](https://standards.iteh.ai/catalog/standards/sist/535314d7-7a0a-46c2-85ef-2ec1fc722cc5/sist-ets-300-417-1-1-e1-2003)

<https://standards.iteh.ai/catalog/standards/sist/535314d7-7a0a-46c2-85ef-2ec1fc722cc5/sist-ets-300-417-1-1-e1-2003>

Contents

Foreword.....	7
1 Scope	9
2 Normative references	10
3 Definitions and abbreviations	11
3.1 Abbreviations	11
3.2 Definitions	16
3.3 Naming and numbering conventions	19
3.3.1 Bit numbering scheme.....	19
3.3.2 STM-N SOH byte numbering scheme.....	19
3.3.3 Atomic function naming scheme	20
3.3.4 Information naming scheme	20
3.3.5 AU/TU numbering scheme	21
3.3.6 Reference points numbering scheme	23
3.3.7 Tributary port numbering scheme	23
3.3.8 PU numbering scheme.....	24
3.3.9 Supervision variables numbering scheme.....	25
3.4 Symbols and diagrammatic conventions	26
4 Introduction.....	28
4.1 Functional modelling rationale	28
4.1.1 Description of network elements- equipment functional specification	28
4.1.2 Implementation independence	28
4.1.3 Universal representation for management	29
4.2 The underlying principles of functional modelling	29
4.2.1 The client-server relationship	29
4.2.2 Atomic functions and compound functions.....	29
4.2.3 Network functions included in specific equipment.....	29
4.2.4 The functional model and the information model	30
5 Network layering principles.....	31
5.1 Transmission layers	31
5.2 Atomic functions.....	32
5.2.1 Connection function.....	33
5.2.2 Trail termination function	33
5.2.3 Adaptation function.....	35
5.3 Reference points.....	36
5.4 Transmission sub-layers	36
6 Combination rules	37
6.1 General	37
6.1.1 Binding at connection points.....	37
6.1.2 Binding at (termination) connection points	37
6.1.3 Binding at APs	38
6.1.4 Alternative binding representations	38
6.2 Directionality.....	38
6.3 Compound functions	38
6.4 Major compound functions.....	39
6.5 Trail, (sub)network connections, link connections, matrix connections, and tandem connections.....	39
6.6 Matrix connections	40
6.6.1 1-port	41
6.6.2 2-port	41
6.6.3 3-port	42
6.6.4 4-port	42

7	Maintenance signals and processes	44
7.1	Trail Trace Identifier (TTI)	44
7.2	Trail Signal Label (TSL)	45
7.2.1	Unequipped signal application	46
7.2.2	Supervisory-unequipped signal application	47
7.2.3	Adaptation function selection supervision process	47
7.2.4	Connection monitoring application	48
7.3	Error Detection Code (EDC)	48
7.4	Remote indicators	48
7.4.1	Remote Defect Indicator (RDI)	49
7.4.2	Remote Error Indicator (REI)	51
7.5	Alarm Indication Signal (AIS)	52
7.6	Non-intrusive monitoring of characteristic information at connection points	54
7.7	Signal fail and signal degrade	55
7.7.1	Server Signal Fail (aSSF) signal	55
7.7.2	Server Signal Fail failure (fSSF)	55
7.7.3	Server Signal Degrade (aSSD) signal	55
7.7.4	Trail Signal Fail (aTSF) signal	55
7.7.5	Trail Signal Degrade (aTSD) signal	56
8	Supervision process	57
8.1	Introduction	57
8.2	Atomic function fault management	59
8.2.1	Defect filter f1	60
8.2.1.1	Introduction	60
8.2.1.2	Trail Signal Label (TSL) and unequipped	60
8.2.1.3	Trail Trace Identifier (TTI)	62
8.2.1.4	Degraded (DEG)	63
8.2.1.5	Remote Defect Indicator (RDI)	64
8.2.1.6	Loss of signal	64
8.2.1.7	Alarm Indication Signal (AIS)	65
8.2.1.8	Loss of frame, multiframe, pointer	66
8.2.1.9	Failure of protocol	66
8.2.1.10	Equipment defects	66
8.2.1.11	Transmit Fail	66
8.2.2	Consequent action filter f2	66
8.2.2.1	Alarm Indication Signal (AIS)	68
8.2.2.2	Remote Defect Indicator (RDI)	68
8.2.2.3	Remote Error Indication (REI)	69
8.2.2.4	Server Signal Fail (SSF)	69
8.2.2.5	Trail Signal Fail (TSF)	69
8.2.2.6	Trail Signal Degrade (TSD)	70
8.2.2.7	Unequipped Virtual Container (VC) signal	70
8.2.2.8	Unit Failure (UF)	70
8.2.2.9	(Automatic) laser shutdown (ALS/LS)	70
8.2.2.10	Server Signal Degrade (SSD)	70
8.2.3	Fault cause filter f3	71
8.2.3.1	Termination sink function	71
8.2.3.2	Termination supervisory sink function	71
8.2.3.3	Adaptation sink function	72
8.2.3.4	Connection function	72
8.2.4	Performance monitoring filter f11 (pN_EBC)	72
8.2.5	Performance monitoring filter f12 (pN_DS)	72
8.2.6	Performance monitoring filter f21 (pF_EBC)	73
8.2.7	Performance monitoring filter f22 (pF_DS)	73
8.2.8	Other performance monitoring parameters (pOFS, pPSC, pPJE)	73
8.3	Equipment management function fault management process	73
8.3.1	Failure filter f4	74
8.3.2	Replaceable unit alarm filter f5	74
8.3.3	Network element alarm filter f6	74
8.3.4	Station alarm filter f7	74
8.3.5	Failure report filter f8	74
8.4	Equipment Management Function (EMF) performance monitoring process	74

8.4.1	PM filter f13 (N_ES).....	75
8.4.2	PM filter f23 (F_ES).....	76
8.4.3	PM filter f14 (N_SES).....	76
8.4.4	PM filter f24 (F_SES).....	76
8.4.5	PM filter f15 (N_UAT_cmd).....	76
8.4.6	PM filter f25 (F_UAT_cmd).....	76
8.4.7	PM filter f16 (N_BBE).....	76
8.4.8	PM filter f26 (F_BBE).....	76
8.4.9	PM filter f31 (history management).....	76
8.5	Trail termination point mode and port mode.....	77
9	Protection process.....	79
9.1	Introduction.....	79
9.2	General.....	79
9.2.1	Protection architectures.....	80
9.2.2	Switching types.....	81
9.2.2.1	APS channel provisioning.....	82
9.2.2.2	APS channel usage.....	82
9.2.2.3	APS channel coding.....	82
9.2.3	Operation types.....	82
9.2.4	Protection switch requests.....	82
9.2.5	Protection switch performance.....	83
9.2.6	Protection switch state machine.....	83
9.2.7	Protection connection function (I/O and processes).....	83
9.3	Trail protection class.....	84
9.3.1	Linear trail protection.....	84
9.3.2	SPRING protection.....	85
9.3.3	DPRING protection.....	87
9.4	SNC protection class.....	87
9.4.1	Inherently monitored SNC (SNC/I) protection.....	87
9.4.2	Non-intrusively monitored SNC (SNC/N) protection.....	88
9.4.3	Tandem connection protection.....	89
9.5	Equipment protection.....	89
10	Timing processes.....	90
10.1	Introduction.....	90
10.2	Synchronization timing collection.....	90
10.2.1	External synchronization reference inputs.....	91
10.2.2	Internal synchronization reference input.....	91
10.3	Synchronization timing selection and processing.....	91
10.3.1	Synchronization reference source selection.....	91
10.3.2	Clock processing.....	91
10.4	Synchronization timing distribution.....	92
10.4.1	Internal synchronization distribution interfaces.....	92
10.4.2	Synchronization reference outputs.....	92
10.5	Inter atomic function timing.....	92
10.6	AIS timing.....	93
11	General performance.....	94
11.1	Availability objectives.....	94
11.1.1	General.....	94
11.1.2	Parameters.....	94
11.1.3	Derivation of MTBF values.....	95
11.2	Transfer delay.....	95
11.3	Jitter and wander.....	95
11.3.1	Jitter and wander generation.....	96
11.3.1.1	Jitter and wander generation on STM-N signals.....	96
11.3.1.2	Jitter and wander generation on PDH interfaces.....	96
11.3.1.3	Jitter and wander generation on 2 048 kHz or 2 048 kbit/s synchronization interfaces.....	98
11.3.2	Jitter and wander tolerance.....	98
11.3.2.1	Jitter and wander tolerance on optical interfaces.....	98

11.3.2.2	Jitter and wander tolerance on traffic carrying electrical interfaces	98
11.3.2.3	Jitter and wander tolerance on 2 048 kHz and 2 048 kbit/s synchronization interfaces	98
11.3.3	Jitter and wander transfer functions	99
11.3.4	Performance on synchronization reference change-over	99
11.4	Error performance	99
11.5	Blocking factor	99
11.6	Connection set-up time	99
Annex A (normative):	Pointer generation	100
Annex B (normative):	Pointer interpretation	102
Annex C (informative):	Network "production rules"	106
Annex D (informative):	Flexible assignment of tributary port to VC-12 capacity	108
Annex E (informative):	Relationship between TU-2/12 address, and location of columns within a VC-4	109
Annex F (informative):	Performance monitoring history process	111
Annex G (informative):	Protection switch examples	113
Annex H (informative):	Bibliography	114
History		115

iTech STANDARD PREVIEW
(standards.itech.ai)

SIST ETS 300 417-1-1 E1:2003

<https://standards.itech.ai/catalog/standards/sist/535314d7-7a0a-46c2-85ef-2ec1fc722cc5/sist-ets-300-417-1-1-e1-2003>

Foreword

This European Telecommunication Standard (ETS) has been produced by the Transmission and Multiplexing (TM) Technical Committee of the European Telecommunications Standards Institute (ETSI).

This ETS has been produced in order to provide inter-vendor and inter-operator compatibility of Synchronous Digital Hierarchy (SDH) equipment.

This ETS consists of 8 parts as follows:

- Part 1:** "Generic processes and performance" (DE/TM-01015-1-1).
- Part 2: "Physical section layer functions" (DE/TM-01015-2-1).
- Part 3: "STM-N regenerator and multiplex section layer functions" (DE/TM-01015-3-1).
- Part 4: "SDH path layer functions" (DE/TM-01015-4-1).
- Part 5: "PDH path layer functions" (DE/TM-01015-5-1).
- Part 6: "Synchronization distribution layer functions" (DE/TM-01015-6-1).
- Part 7: "Auxiliary layer functions" (DE/TM-01015-7-1).
- Part 8: "Major compound functions" (DE/TM-01015-8-1).

Parts 2 to 7 specify the layers and their atomic functions. Part 8 specifies combinations of atomic functions, the compound and major compound functions.

NOTE 1: This ETS does not currently address configuration management.

NOTE 2: The SDH radio equipment functional blocks are addressed by ETSI STC TM4.

Transposition dates	
Date of adoption of this ETS:	31 January 1996
Date of latest announcement of this ETS (doa):	30 April 1996
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	31 October 1996
Date of withdrawal of any conflicting National Standard (dow):	31 October 1996

Blank page

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 417-1-1 E1:2003](https://standards.iteh.ai/catalog/standards/sist/535314d7-7a0a-46c2-85ef-2ec1fc722cc5/sist-ets-300-417-1-1-e1-2003)

<https://standards.iteh.ai/catalog/standards/sist/535314d7-7a0a-46c2-85ef-2ec1fc722cc5/sist-ets-300-417-1-1-e1-2003>

1 Scope

This European Telecommunication Standard (ETS) specifies a library of basic building blocks and a set of rules by which they may be combined in order to describe a digital transmission equipment. The library comprises the functional building blocks needed to specify completely the generic functional structure of the European digital transmission hierarchy. In order to be compliant with this ETS, equipment needs to be describable as an interconnection of a subset of these functional blocks contained within this ETS. The interconnections of these blocks should obey the combination rules given.

This ETS specifies both the components and the methodology that should be used in order to specify SDH equipment; it does not specify an individual SDH equipment as such.

The specification method is based on functional decomposition of the equipment into atomic, compound and major compound functions. The equipment is then described by its Equipment Functional Specification (EFS) which lists the constituent atomic and compound functions, their interconnection, and any overall performance objectives (e.g. transfer delay, availability, etc.). The concept is illustrated in figure 1.

The internal structure of the implementation of this functionality (equipment design) need not be identical to the structure of the functional model, as long as all the details of the externally observable behaviour comply with the EFS.

The equipment functionality is consistent with the SDH multiplexing structure given in ETS 300 147 [1].

Equipment developed prior to the production of this ETS may not comply in all details with this ETS.

Equipment which is normally stated to be compliant with this ETS may not fulfil all the requirements in the case that it is interworking with old equipment that is not compliant with this ETS.

The structure of the ETS envisages the addition of new layers atomic functions and (major) compound functions. For example, Asynchronous Transfer Mode (ATM), Integrated Services Digital Network (ISDN) and $n \times 64$ kbit/s layers could be added as new complete parts while corresponding adaptation functions are added to existing layers. "SDH interworking" functionality can be added as new layers in part 5. This approach allows for short development times for standards describing new functionality.

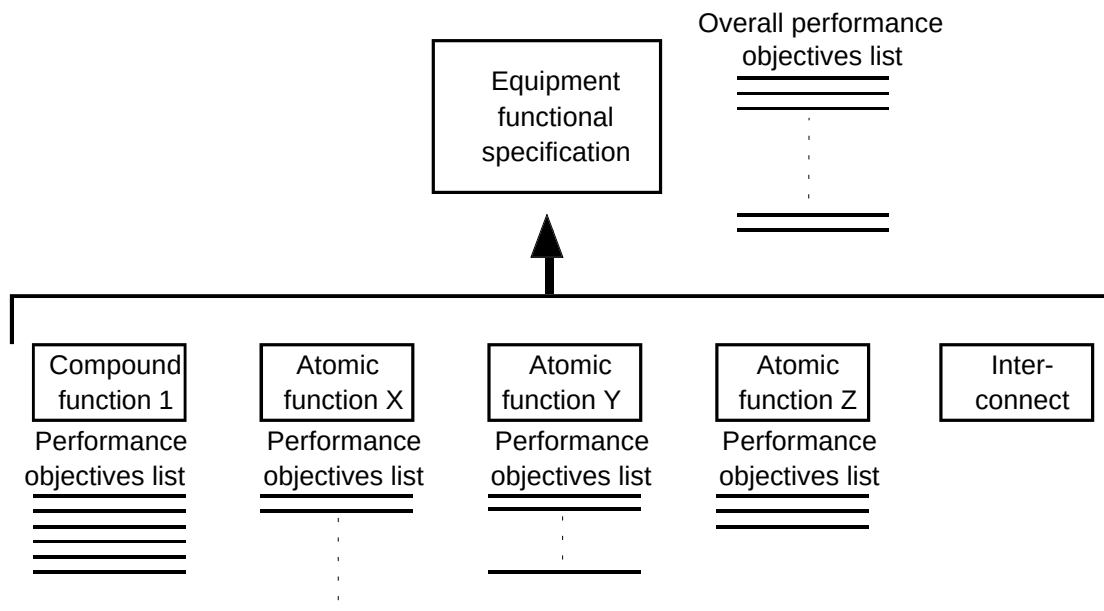


Figure 1: Composition of equipment functional specification

2 Normative references

This ETS incorporates by dated and undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] ETS 300 147 (1995): "Transmission and Multiplexing (TM); Synchronous Digital Hierarchy (SDH); Multiplexing structure".
- [2] ETS 300 232: "Transmission and Multiplexing (TM); Optical interfaces for equipments and systems relating to the Synchronous Digital Hierarchy [ITU-T Recommendation G.957 (1993) modified]".
- [3] prETS 300 304: "Transmission and Multiplexing (TM); Synchronous Digital Hierarchy (SDH) information model for the Network Element (NE) view".
- [4] ETS 300 019: "Equipment Engineering (EE); Environmental conditions and environmental tests for telecommunications equipment".
- [5] prETS 300 462-2: "Transmission and Multiplexing (TM); Generic requirements for synchronization networks; Part 2: Synchronization network architecture".
- [6] ITU-T Recommendation G.803 (1993): "Architecture of transport networks based on the synchronous digital hierarchy (SDH)".
- [7] ITU-T Recommendation G.703 (1991): "Physical/electrical characteristics of hierarchical digital interfaces".
- [8] ITU-T Recommendation G.704 (1995): "Synchronous frame structures used at 1 544, 6 312, 2 048, 8 448 and 44 736 kbit/s hierarchical levels".
- [9] ITU-T Recommendation G.742 (1988): "Second order digital multiplex equipment operating at 8 448 kbit/s and using positive justification".
- [10] ITU-T Recommendation G.751 (1988): "Digital multiplex equipments operating at the third order bit rate of 34 368 kbit/s and the fourth order bit rate of 139 264 kbit/s and using positive justification".
- [11] ITU-T Recommendation G.957 (1995): "Optical interfaces for equipments and systems relating to the synchronous digital hierarchy".
- [12] ITU-T Recommendation G.783 (1994): "Characteristics of synchronous digital hierarchy (SDH) equipment functional blocks".
- [13] ITU-T Recommendation G.811 (1988): "Timing requirements at the outputs of primary reference clocks suitable for plesiochronous operation of international digital links".
- [14] ITU-T Recommendation G.821 (1988): "Error performance of an international digital connection forming part of an integrated services digital network".
- [15] ITU-T Recommendation G.823 (1988) modified according COM XVIII - R. report: "The control of jitter and wander within digital networks which are based on the 2 048 kbit/s hierarchy".
- [16] ITU-T Recommendation G.825 (1993): "The control of jitter and wander within digital networks which are based on the synchronous digital hierarchy (SDH)".

- [17] ITU-T Recommendation G.826 (1993): "Error performance parameters and objectives for international, constant bit rate digital paths at or above the primary rate".
- [18] ITU-T Recommendation G.958 (1994): "Digital line systems based on the synchronous digital hierarchy for use on optical cables".
- [19] ITU-T Recommendation G.911 (1993): "Parameters and calculation methodologies for reliability and availability of fibre optic systems".
- [20] ITU-T Recommendation E.862 (1992): "Dependability planning of telecommunication networks".
- [21] ITU-T Recommendation X.721 (1992): "Information technology - Open Systems Interconnection - Structure of Management Information: Guidelines for the definition of managed objects".
- [22] ITU-T Recommendation G.708 (1993): "Network node interface for the synchronous digital hierarchy".
- [23] ITU-T Recommendation M.20 (1992): "Maintenance philosophy for telecommunications networks".
- [24] ITU-T Recommendation M.2120 (1992): "Digital path, section and transmission system fault detection and localization procedures".
- [25] ITU-T Recommendation G.784 (1994): "Synchronous digital hierarchy (SDH) management".
- [26] prETS 300 462-5: "Transmission and Multiplexing (TM); Generic requirements for synchronization networks; Part 5: Timing characteristics of slave clocks suitable for operation in Synchronous Digital Hierarchy (SDH) equipment".

STANDARD PREVIEW

3 Definitions and abbreviations

3.1 Abbreviations

For the purposes of this ETS the following abbreviations apply:

A	Adaptation function
AcSL	Accepted Signal Label
AcTI	Accepted Trace identifier
ADM	Add-Drop Multiplexer
AI	Adapted Information
AIS	Alarm Indication Signal
ALS	Automatic Laser Shutdown
AP	Access Point
APId	Access Point Identifier
APS	Automatic Protection Switch
ATM	Asynchronous Transfer Mode
AU	Administrative Unit
AU-n	Administrative Unit, level n
AUG	Administrative Unit Group
BBE	Background Block Error
BBER	Background Block Error Ratio
BER	Bit Error Ratio
BFA	Basic Frame Alignment
BIP	Bit Interleaved Parity
BIP-N	Bit Interleaved Parity, width N
BITS	Building Integrated Timing Supply
BNF	Backus-Naur Form
BSHR	Bi-directional Self Healing Ring

C	Connection function
Cs	supervisory-unequipped Connection function
CH	Channel
CI	Characteristic Information
CK	Clock
CM	Connection Matrix
CMI	Coded Mark Inversion
Ctrl	Control
Co	Connection
CP	Connection Point
CRC	Cyclic Redundancy Check
CRC-N	Cyclic Redundancy Check, width N
CSES	Consecutive Severely Errored Seconds
CTF	Compound Timing Function
D	Data
DCC	Data Communications Channel
DEC	Decrement
DEG	Degraded
DEGTHR	Degraded Threshold
DL	Data Link
DPRING	Dedicated Protection Ring
DROP	Decreased Received Optical Power
DXC	Digital Cross Connect
E0	Electrical interface signal 64 kbit/s
E11	Electrical interface signal 1 544 kbit/s
E12	Electrical interface signal 2 048 kbit/s
E22	Electrical interface signal 8 448 kbit/s
E31	Electrical interface signal 34 368 kbit/s
E32	Electrical interface signal 44 736 kbit/s
E4	Electrical interface signal 139 264 kbit/s
EBC	Errored Block Count
ECC	Embedded Communications Channel
ECC(x)	Embedded Communications Channel, Layer x
EDC	Error Detection Code
EDCV	Error Detection Code Violation
EFS	Equipment Functional Specification
EMF	Equipment Management Function
EPS	Equipment Protection Switch
EQ	Equipment
ERS	Elementary Regenerator Section
ES	Errored Second
ES	Electrical Section
ESR	Errored seconds Ratio
Ex	CCITT Recommendation G.703 type electrical signal, bit rate order x
ExSL	Expected Signal Label
EXTI	Expected Trace Identifier
F_B	Far-end Block
F_BBE	Far-end Background Block Error
F_DS	Far-end Defect Second
F_EBC	Far-end Errored Block Count
F_ES	Far-end Errored Second
F_SES	Far-end Severely Errored Second
F_SESTHR	Far-end Severely Errored Second Threshold
F_UAT_cmd	Far-end UnAvailable Time command
FAS	Frame Alignment Signal
FEBC	Far End Block Error
FERF	Far End Receive Failure
FIFO	First In First Out
FIT	Failure In Time
FO	Frame Offset information
FOP	Failure Of Protocol
FS	Frame Start signal
HDB3	High Density Bipolar of order 3

HDLC	High-level Data Link Control procedure
HO	Higher Order
HOVC	Higher Order Virtual Container
HP	Higher order Path
ID	Identifier
IF	In Frame state
INC	Increment
IOS	Intra-Office Section
IS	Intermediate System
ISDN	Integrated Services Digital Network
ISO	International Standardization Organization
LAN	Local Area Network
LBC	Laser Bias Current
LC	Link Connection
LLC	Logical Link Control
LMC	Laser Modulation Current
LO	Lower Order
LOA	Loss Of Alignment; generic for LOF, LOM, LOP
LOF	Loss Of Frame
LOM	Loss Of Multiframe
LOP	Loss Of Pointer
LOS	Loss Of Signal
LOVC	Lower Order Virtual Container
LPx	Lower order Path for VC-x (x = 11, 12, 2, 3)
LT	Line Termination
M&CF	Management & Communication Function
MC	Matrix Connection
MCF	Message Communications Function
MDT	Mean Down Time
mei	maintenance event information
MI	Management Information
MO	Managed Object
MON	Monitored
MP	Management Point
MS	Multiplex Section
MS1	STM-1 Multiplex Section
MS4	STM-4 Multiplex Section
MS16	STM-16 Multiplex Section
MSB	Most Significant Bit
MSOH	Multiplex Section Overhead
MSP	Multiplex Section Protection
MSPG	Multiplex Section Protection Group
MTBF	Mean Time Between Failures
MTTR	Mean Time To Repair
N_B	Near-end Block
N_BBE	Near-end Background Block Error
N_DS	Near-end Defect Second
N_EBC	Near-end Errored Block Count
N_ES	Near-end Errored Second
N_SES	Near-end Severely Errored Second
N_SESTHR	Near-end Severely Errored Second Threshold
N_UAT_cmd	Near-end UnAvailable Time command
NC	Network Connection
N.C.	Not Connected
NCM	No CRC-4 Multiframe alignment signal
NDF	New Data Flag
NE	Network Element
NNI	Network Node Interface
NMON	Not Monitored
NPDU	Network Protocol Data Unit
NRZ	Non-Return to Zero
NRZI	Non-Return to Zero Inverted
NSAP	Network Service Access Point

STANDARD PREVIEW
(standards.iteh.ai)
SIST ETS 300 417-1-1 E1:2003
<https://standards.iteh.ai/catalog/standards/sist/535314d7-7a0a-46c2-85ef-461672cc5/sist-ets-300-417-1-1-e1-2003>