
**Resistance spot-, projection- and seam-
welding — Method for determining the
transition resistance on aluminium and
steel material**

*Soudage par résistance par points, par bossages et à la molette —
Méthode pour la détermination de la résistance de transition sur
l'aluminium et sur l'acier*

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 18594:2007](https://standards.iteh.ai/catalog/standards/sist/4b8cdea4-0a7f-4304-82e4-b6484895cdb2/iso-18594-2007)

[https://standards.iteh.ai/catalog/standards/sist/4b8cdea4-0a7f-4304-82e4-
b6484895cdb2/iso-18594-2007](https://standards.iteh.ai/catalog/standards/sist/4b8cdea4-0a7f-4304-82e4-b6484895cdb2/iso-18594-2007)



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 18594:2007](https://standards.iteh.ai/catalog/standards/sist/4b8cdea4-0a7f-4304-82e4-b6484895cdb2/iso-18594-2007)

<https://standards.iteh.ai/catalog/standards/sist/4b8cdea4-0a7f-4304-82e4-b6484895cdb2/iso-18594-2007>

© ISO 2007

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Terms and definitions	1
3 Basic principles	2
4 Measurement	2
4.1 Measuring set-up	2
4.2 Measurement procedure	5
5 Test equipment	6
6 Formulae and abbreviations for calculating the transition resistance	7
7 Test report	8
Annex A (informative) Test report	9
Bibliography	11

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 18594:2007](https://standards.iteh.ai/catalog/standards/sist/4b8cdea4-0a7f-4304-82e4-b6484895cdb2/iso-18594-2007)

<https://standards.iteh.ai/catalog/standards/sist/4b8cdea4-0a7f-4304-82e4-b6484895cdb2/iso-18594-2007>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 18594 was prepared by Technical Committee ISO/TC 44, *Welding and allied processes*, Subcommittee SC 6, *Resistance welding*.

Requests for official interpretations of any aspect of this International Standard should be directed to the Secretariat of ISO/TC 44/SC 6 via your national standards body. A complete listing of these bodies can be found at www.iso.org.

iTeh STANDARD PREVIEW
(standards.iteh.ai)
ISO 18594:2007
<https://standards.iteh.ai/catalog/standards/sist/4b8cdea4-0a7f-4304-82e4-b6484895cdb2/iso-18594-2007>

Resistance spot-, projection- and seam-welding — Method for determining the transition resistance on aluminium and steel material

1 Scope

This International Standard specifies the procedure and the experimental set-up for determining the transition resistance of a single sheet or two overlapping sheets of aluminium or steel, with or without surface treatment, and with or without surface coating.

2 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

2.1 contact resistance

electric property of a contact area between two bodies which opposes and limits the passage through it of a steady current

EXAMPLE The contacts between electrode/electrode, electrode/sheet and sheet/sheet.

2.2 bulk resistance

ohmic resistance of an electrical conductor

2.3 total resistance

R

electrical resistance as measured between the sensing clamps (includes both bulk and contact resistances)

See Figure 1 and Figure 2.

2.4 set-up resistance

R_s

resistance of the experimental set-up between the sensing clamps without metal sheet(s) between the electrodes, the two electrodes being in direct contact

See Figure 2 b), $(R_0 + R_1 + R_7)$.


2.5 transition resistance

R_t

total resistance minus the set-up resistance

3 Basic principles

Figure 1 shows schematically the resistances in the weld zone of the spot welding process. The contact resistances are not directly accessible to measurement.

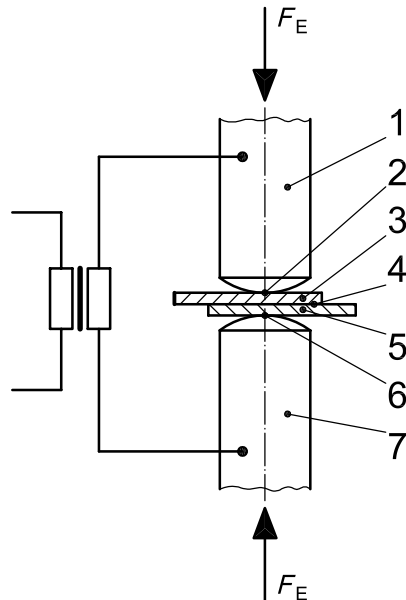

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Key

F_E electrode force

- 1 bulk resistance of top electrode, R_1
- 2 contact resistance top electrode/upper sheet, R_2
- 3 bulk resistance of upper sheet, R_3
- 4 contact resistance sheet/sheet, R_4
- 5 bulk resistance of lower sheet, R_5
- 6 contact resistance lower sheet/bottom electrode, R_6
- 7 bulk resistance of bottom electrode, R_7

Figure 1 — Resistance (schematic illustration)

4 Measurement

4.1 Measuring set-up

Figure 2 a) shows schematically the experimental set-up for the determination of the transition resistance with one metal sheet between the electrodes. The total resistance is measured by means of the voltage/potential drop between the two sensing clamps.

Either one or two specimens are placed between the electrodes, the electrode force is applied and a rectified current from an external source is allowed to flow through the test pieces via the electrodes. The voltage drop between the sensing clamps is measured and the total resistance calculated using Ohm's law:

$$R = \frac{U}{I} \tag{1}$$

where

R is the total resistance, in ohms;

U is the voltage, in volts;

I is the current, in amperes.

The resistance of the experimental set-up, or set-up resistance, is obtained by measuring the voltage drop between the sensing clamps without any test pieces between the electrodes [see Figure 2 b)]. The set-up resistance comprises the bulk resistance of the electrodes between the sensing clamps and the contact resistance between the electrodes.


In the case of single metal sheet measurements, the total resistance consists of the bulk resistances of the top and bottom electrodes between the sensing clamps (R_1 , R_7), the contact resistances (R_2 , R_6) and the bulk resistance of the sheet (R_3) [see Figure 2 c)].

The total resistance, in the case of two-sheet measurements, consists of the bulk resistances of the top and bottom electrodes between the sensing clamps (R_1 , R_7), the contact resistances (R_2 , R_4 , R_6) and bulk resistances of the two-sheets (R_3 , R_5) [see Figure 2 d)].

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO 18594:2007](https://standards.iteh.ai/catalog/standards/sist/4b8cdea4-0a7f-4304-82e4-b6484895cdb2/iso-18594-2007)

<https://standards.iteh.ai/catalog/standards/sist/4b8cdea4-0a7f-4304-82e4-b6484895cdb2/iso-18594-2007>

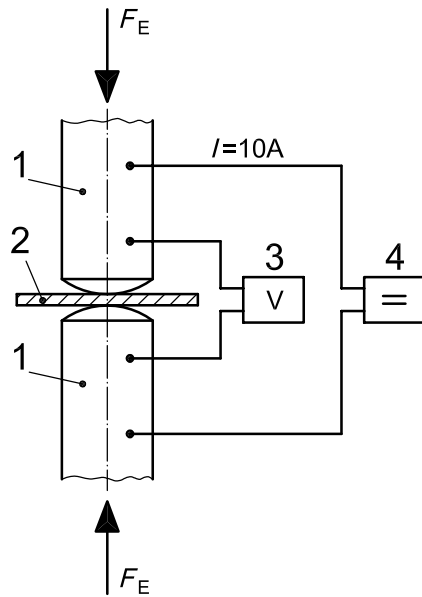


Key

- 1 electrode
- 2 sheet
- 3 voltmeter
- 4 d.c. current source
- F_E electrode force
- I current

a) Set-up for determining the transition resistance


(standards.iteh.ai)

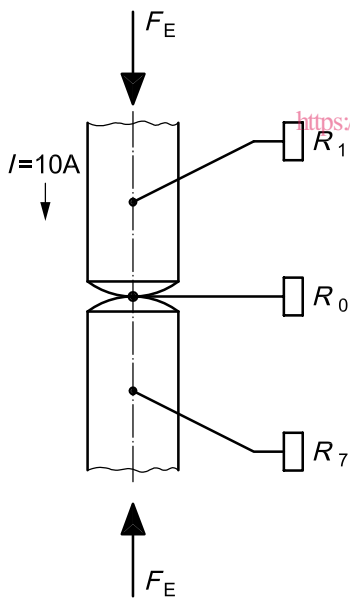

Key

- F_E electrode force
- I current
- R_0 contact resistance
- $R_1; R_7$ bulk resistance


b) Measurement of the set-up resistance

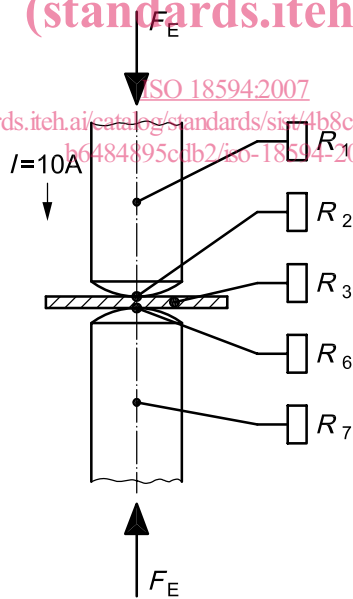

Key

- F_E electrode force
- I current
- $R_1; R_3; R_7$ bulk resistance
- $R_2; R_6$ contact resistance

c) Single-sheet measurement

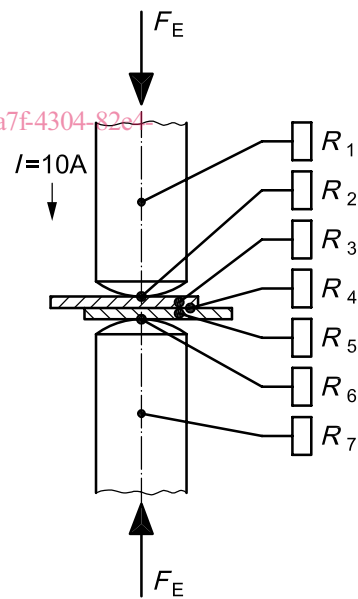

Key

- F_E electrode force
- I current
- $R_1; R_3; R_5; R_7$ bulk resistance
- $R_2; R_4; R_6$ contact resistance

d) Two-sheet measurement

Figure 2 — Experimental set-up for determining the transition resistance

4.2 Measurement procedure

4.2.1 Preparatory steps

Test pieces, e.g. of a size 50 mm × 100 mm, are taken from each material to be investigated. Surface conditions which do not correspond to production conditions in the measurement area (e.g. dirt, scratches, fingerprints) are not permitted. Normal surface conditions (e.g. oiled, phosphated, conversion coated) shall be documented in the test report. In the case of two-sheet measurements, the specimens shall be flat. Burrs are not admissible at the sheet-to-sheet interface. Before starting the test, both the measuring set-up and the sheet material shall be at ambient conditions.

In the case of two-sheet measurements, it is recommended that the upper and lower surfaces of each metal sheet are marked with "A" and "B" respectively. It is further recommended that test runs with the following combinations are carried out:

- A-B/B-A,
- B-A/A-B, and
- A-B/A-B.

During a single test series, the surface position of the test pieces shall not be changed.

4.2.2 Determination of the set-up resistance

The experimental set-up is used as shown in Figure 2. The set-up resistance shall be measured, as described under 4.1, after the electrodes are brought together. The electrode speed shall not exceed 15 mm/s at contact, and the dynamic electrode force shall not exceed the set force.

The set-up resistance shall be measured before and after each test series. For this purpose, the electrodes shall be prepared using emery paper with a grain size of 1 200, first the top electrode and then the bottom one. Any dust shall be removed using a clean, dry tissue or micro-fibre cloth. The electrodes are then brought together and the set-up resistance measured as described above.

Since the set-up resistance can change during a test series due to pick-up on the working faces, the set-up resistance values shall be determined both before and after each test series. The set-up resistance for the test series is the mean value of the two measurements.

4.2.3 Measuring the total resistance

A minimum of seven measurements shall be carried out at different locations on each test piece (see 4.2.1). In order to make the seven measurements on each test series, the specimen shall be positioned between the electrodes and the electrode force applied. After the nominal value of the electrode force is reached, the d.c. power source is switched on and the voltage drop measured after an elapsed time of (15 ± 1) s.

The location of the measuring points shall be selected such that the distance centre-to-centre and centre-to-specimen edge is greater than, or equal to, 15 mm (see Figure 3).