

ETSI TS 127 007 V14.5.0 (2017-10)



**Digital cellular telecommunications system (Phase 2+) (GSM);
Universal Mobile Telecommunications System (UMTS);**

LTE;

**AT command set for User Equipment (UE)
(3GPP TS 27.007 version 14.5.0 Release 14)**



ReferenceRTS/TSGC-0127007ve50

Keywords

GSM,LTE,UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommiteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2017.

All rights reserved.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.

3GPP™ and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M logo is protected for the benefit of its Members.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Foreword.....	2
Modal verbs terminology.....	2
Foreword.....	9
1 Scope	10
2 References	10
3 Definitions and abbreviations.....	17
3.1 Definitions	17
3.2 Abbreviations	17
4 AT command syntax	18
4.0 General	18
4.1 Command line	18
4.2 Information responses and result codes.....	19
4.3 ITU-T Recommendation V.250 [14] TE-TA interface commands	19
5 General commands.....	20
5.0 General	20
5.1 Request manufacturer identification +CGMI	20
5.2 Request model identification +CGMM	21
5.3 Request revision identification +CGMR	21
5.4 Request product serial number identification +CGSN	22
5.5 Select TE character set +CSCS	23
5.6 Request international mobile subscriber identity +CIMI	24
5.7 Multiplexing mode +CMUX	25
5.8 ITU-T Recommendation V.250 [14] generic TA control commands.....	27
5.9 PCCA STD-101 [17] select wireless network +WS46.....	27
5.10 Informative examples.....	28
6 Call control commands and methods	29
6.0 General	29
6.1 Select type of address +CSTA.....	29
6.2 ITU-T Recommendation V.250 [14] dial command D.....	30
6.3 Direct dialling from phonebooks.....	30
6.4 Call mode +CMOD	32
6.4A Voice call mode +CVMOD.....	32
6.5 Hangup call +CHUP.....	33
6.6 Alternating mode call control method	33
6.7 Select bearer service type +CBST.....	35
6.8 Radio link protocol +CRLP	37
6.9 Service reporting control +CR.....	38
6.10 Extended error report +CEER	39
6.11 Cellular result codes +CRC	40
6.12 HSCSD device parameters +CHSD	41
6.13 HSCSD transparent call configuration +CHST	42
6.14 HSCSD non-transparent call configuration +CHSN	43
6.15 HSCSD current call parameters +CHSC.....	44
6.16 HSCSD parameters report +CHSR	44
6.17 HSCSD automatic user initiated upgrading +CHSU.....	45
6.18 HSCSD non-transparent asymmetry configuration +CHSA	46
6.19 Single numbering scheme +CSNS	46
6.20 Voice hangup control +CVHU.....	47
6.21 CCITT V.120 [36] rate adaption protocol +CV120	48
6.22 Settings date format +CSDF.....	49
6.23 Silence command +CSIL.....	50

6.24	Settings time format +CSTF.....	50
6.25	ITU-T Recommendation V.250 [14] call control commands.....	52
6.26	ITU-T Recommendation V.250 [14] data compression commands.....	52
6.27	Initiate eCall +CECALL.....	52
6.28	eCall Notification +CECN.....	53
6.29	Informative examples.....	54
7	Network service related commands.....	55
7.0	General.....	55
7.1	Subscriber number +CNUM.....	55
7.2	Network registration +CREG.....	56
7.3	PLMN selection +COPS.....	58
7.4	Facility lock +CLCK.....	60
7.5	Change password +CPWD.....	62
7.6	Calling line identification presentation +CLIP.....	62
7.7	Calling line identification restriction +CLIR.....	64
7.8	Connected line identification presentation +COLP.....	65
7.9	Called line identification presentation +CDIP.....	66
7.10	Closed user group +CCUG.....	67
7.11	Call forwarding number and conditions +CCFC.....	68
7.12	Call waiting +CCWA.....	69
7.13	Call related supplementary services +CHLD.....	71
7.14	Call deflection +CTFR.....	72
7.15	Unstructured supplementary service data +CUSD.....	73
7.16	Advice of charge +CAOC.....	74
7.17	Supplementary service notifications +CSSN.....	75
7.18	List current calls +CLCC.....	77
7.19	Preferred PLMN list +CPOL.....	78
7.20	Selection of preferred PLMN list +CPLS.....	80
7.21	Read operator names +COPN.....	81
7.22	eMLPP priority registration and interrogation +CAEMLPP.....	81
7.23	eMLPP subscriptions +CPPS.....	82
7.24	Fast call setup conditions +CFCS.....	82
7.25	Automatic answer for eMLPP service +CAAP.....	83
7.26	User to user signalling service 1 +CUUS1.....	83
7.27	Preferred network indication +CPNET.....	85
7.28	Preferred network status +CPNSTAT.....	86
7.29	Current packet switched bearer +CPSB.....	86
7.30	Calling name identification presentation +CNAP.....	88
7.31	Connected line identification restriction status +COLR.....	89
7.32	Service specific access control restriction status +CSSAC.....	89
7.33	Network emergency bearer services support +CNEM.....	91
7.34	Enhanced closed user group +CECUG.....	92
7.35	Communication forwarding number and conditions with URI support +CCFCU.....	94
7.36	Message waiting indication control +CMWI.....	95
7.37	Session start and stop for MMTEL and SMSoverIP applications +CSCM.....	96
7.38	Power saving mode setting +CPSMS.....	98
7.39	Application Start and Stop indication for applications other than MMTEL and SMSoverIP +CACDC.....	99
7.40	eDRX setting +CEDRXS.....	100
7.41	eDRX read dynamic parameters +CEDRXRDP.....	101
7.42	CIoT optimization configuration +CCIOTOPT.....	102
7.43	Informative examples.....	103
8	Mobile termination control and status commands.....	105
8.0	General.....	105
8.1	Phone activity status +CPAS.....	106
8.2	Set phone functionality +CFUN.....	107
8.3	Enter PIN +CPIN.....	108
8.4	Battery charge +CBC.....	110
8.5	Signal quality +CSQ.....	110
8.6	Mobile termination control mode +CMEC.....	111
8.7	Keypad control +CKPD.....	112

8.8	Display control +CDIS	113
8.9	Indicator control +CIND	114
8.10	Mobile termination event reporting +CMER	115
8.11	Select phonebook memory storage +CPBS	118
8.12	Read phonebook entries +CPBR	119
8.13	Find phonebook entries +CPBF	120
8.14	Write phonebook entry +CPBW	123
8.15	Clock +CCLK	124
8.16	Alarm +CALA	125
8.17	Generic SIM access +CSIM	126
8.18	Restricted SIM access +CRSM	127
8.19	Secure control command +CSCC	128
8.20	Alert sound mode +CALM	129
8.21	Ringer sound level +CRSL	129
8.22	Vibrator mode +CVIB	130
8.23	Loudspeaker volume level +CLVL	131
8.24	Mute control +CMUT	131
8.25	Accumulated call meter +CACM	132
8.26	Accumulated call meter maximum +CAMM	132
8.27	Price per unit and currency table +CPUC	133
8.28	Call meter maximum event +CCWE	133
8.29	Power class +CPWC	134
8.30	Set language +CLAN	135
8.31	Language event +CLAE	136
8.32	Set greeting text +CSGT	136
8.33	Set voice mail number +CSVM	137
8.34	Ring melody control +CRMC	138
8.35	Ring melody playback +CRMP	139
8.36	Master reset +CMAR	139
8.37	List all available AT commands +CLAC	140
8.38	Delete alarm +CALD	140
8.39	Postpone or dismiss an alarm +CAPD	141
8.40	Automatic time zone update +CTZU	141
8.41	Time zone reporting +CTZR	142
8.42	Enter protocol mode +CPROT	143
8.43	Generic UICC logical channel access +CGLA	144
8.44	Restricted UICC logical channel access +CRLA	145
8.45	Open logical channel +CCHO	147
8.46	Close logical channel +CCHC	147
8.47	EAP authentication +CEAP	148
8.48	EAP retrieve parameters +CERP	150
8.49	UICC application discovery +CUAD	150
8.50	Mobile originated location request +CMOLR	151
8.51	Backlight +CBKLT	155
8.52	Command touch screen action +CTSA	156
8.53	Command screen orientation +CSO	158
8.54	Command screen size +CSS	160
8.54A	Command display screen boundary +CDSB	161
8.55	Positioning control +CPOS	161
8.56	Positioning reporting +CPOSR	179
8.57	Mobile terminated location request notification +CMTLR	181
8.58	Mobile terminated location request disclosure allowance +CMTLRA	182
8.59	Battery capacity +CBCAP	182
8.60	Battery connection status +CBCON	183
8.61	Battery charger status +CBCHG	184
8.62	Printing IP address format +CGPIAF	184
8.63	IMS single radio voice call continuity +CISRVCC	186
8.64	IMS network reporting +CIREP	186
8.65	Remaining PIN retries +CPINR	188
8.66	Set card slot +CSUS	189
8.67	Emergency numbers +CEN	189
8.68	Availability for voice calls with IMS +CAVIMS	190

8.69	Extended signal quality +CESQ.....	191
8.70	Primary notification event reporting +CPNER	193
8.71	IMS registration information +CIREG.....	194
8.72	Availability for SMS using IMS +CASIMS.....	195
8.73	Monitor of current calls +CMCCS	195
8.74	List of current calls +CLCCS.....	201
8.75	Supported radio accesses +CSRA	204
8.76	Circuit switched fallback +CCSFB	206
8.77	Reading Coverage Enhancement Status +CRCES	207
8.78	Informative examples.....	208
9	Mobile termination errors.....	213
9.1	Report mobile termination error +CMEE.....	213
9.1A	Report mobile originated location request error +CMOLRE	213
9.1B	Report network error codes +CNEC	214
9.2	Mobile termination error result code +CME ERROR.....	215
9.2.0	General.....	215
9.2.1	General errors	216
9.2.2	GPRS and EPS-related errors	217
9.2.2.1	Errors related to a failure to perform an attach.....	217
9.2.2.2	Errors related to a failure to activate a context.....	217
9.2.2.3	Errors related to a failure to disconnect a PDN.....	218
9.2.2.4	Other GPRS errors	218
9.2.3	VBS, VGCS and eMLPP-related errors.....	218
9.3	Mobile termination error result code +CMOLRE	218
9.3.1	General.....	218
9.3.2	Errors	219
9.4	Informative examples.....	219
10	Commands for packet domain.....	219
10.0	General	219
10.1	Commands specific to MTs supporting the packet domain.....	220
10.1.0	General remark about EPS bearer contexts and PDP contexts	220
10.1.1	Define PDP context +CGDCONT	221
10.1.2	Define secondary PDP context +CGDSCONT.....	225
10.1.3	Traffic flow template +CGTFT	227
10.1.4	Quality of service profile (requested) +CGQREQ.....	230
10.1.5	Quality of service profile (minimum acceptable) +CGQMIN	232
10.1.6	3G quality of service profile (requested) +CGEQREQ	233
10.1.7	3G quality of service profile (minimum acceptable) +CGEQMIN.....	236
10.1.8	3G quality of service profile (negotiated) +CGEQNEG	240
10.1.9	PS attach or detach +CGATT	242
10.1.10	PDP context activate or deactivate +CGACT	242
10.1.11	PDP context modify +CGCMOD	243
10.1.12	Enter data state +CGDATA	244
10.1.13	Configure local octet stream PAD parameters +CGCLOSP (Obsolete).....	246
10.1.14	Show PDP address(es) +CGPADDR.....	246
10.1.15	Automatic response to a network request for PDP context activation +CGAUTO	247
10.1.16	Manual response to a network request for PDP context activation +CGANS	248
10.1.17	GPRS mobile station class +CGCLASS	249
10.1.18	Configure local triple-X PAD parameters +CGCLPAD (GPRS only) (Obsolete)	250
10.1.19	Packet domain event reporting +CGEREP	250
10.1.20	GPRS network registration status +CGREG	254
10.1.21	Select service for MO SMS messages +CGSMS.....	257
10.1.22	EPS network registration status +CEREG	257
10.1.23	PDP context read dynamic parameters +CGCONTRDP	260
10.1.24	Secondary PDP context read dynamic parameters +CGSCONTRDP	262
10.1.25	Traffic flow template read dynamic parameters +CGTFTRDP.....	264
10.1.26	Define EPS quality of service +CGEQOS	265
10.1.27	EPS quality of service read dynamic parameters +CGEQOSRDP	267
10.1.28	UE modes of operation for EPS +CEMODE	268
10.1.29	Delete non-active PDP contexts +CGDEL	268

10.1.30	Signalling connection status +CSCON	269
10.1.31	Define PDP context authentication parameters +CGAUTH.....	271
10.1.32	Initial PDP context activation +CIPCA	271
10.1.33	No more PS data +CNMPSD.....	272
10.1.34	UE's usage setting for EPS +CEUS	273
10.1.35	UE's voice domain preference E-UTRAN +CEVDP.....	273
10.1.36	UE's voice domain preference UTRAN +CVDP	274
10.1.37	UE's mobility management IMS voice termination +CMMIVT	275
10.1.38	Power preference indication for EPS +CEPPI.....	275
10.1.39	WLAN offload assistance data +CWLANOLAD.....	276
10.1.40	WLAN offload cell measurement +CWLANOLCM.....	278
10.1.41	APN back-off timer status reporting +CABTSR	279
10.1.42	APN back-off timer read dynamic parameters +CABTRDP	280
10.1.43	Sending of originating data via the control plane +CSODCP.....	281
10.1.44	Reporting of terminating data via the control plane +CRTDCP	282
10.1.45	APN rate control +CGAPNRC	283
10.2	Modem compatibility commands	284
10.2.0	General.....	284
10.2.1	MT originated PDP context activation.....	284
10.2.1.0	General	284
10.2.1.1	Request packet domain service 'D'	284
10.2.1.2	Request packet domain IP service 'D'	286
10.2.2	Network requested PDP context activation	287
10.2.2.0	General	287
10.2.2.1	Automatic response to a network request for PDP context activation 'S0'	287
10.2.2.2	Manual acceptance of a network request for PDP context activation 'A'	287
10.2.2.3	Manual rejection of a network request for PDP context activation 'H'	287
11	Commands for VGCS and VBS	287
11.0	General	287
	Commands specific to MTs supporting the VGCS and VBS	288
11.1.1	Accept an incoming voice group or voice broadcast call +CAJOIN	288
11.1.2	Reject an incoming voice group or voice broadcast call +CAREJ	288
11.1.3	Leave an ongoing voice group or voice broadcast call +CAHLD	289
11.1.4	Talker access for voice group call +CAPTT.....	289
11.1.5	Voice group call uplink status presentation +CAULEV	290
11.1.6	List current voice group and voice broadcast calls +CALCC.....	291
11.1.7	Voice group or voice broadcast call state attribute presentation +CACSP	292
11.1.8	NCH support indication +CANCHEV.....	293
11.1.9	Originator to dispatcher information +COTDI	293
11.1.10	Short data transmission during ongoing VGCS +CEPTT.....	294
11.1.11	Group Id prefixes capability +CGIPC	295
11.2	Modem compatibility commands	296
11.2.0	General.....	296
11.2.1	Request VGCS or VBS service 'D'	296
11.2.2	Termination of an voice group or voice broadcast call 'H'.....	297
11.3.1	VGCS subscriptions and GId status +CGCS	297
11.3.2	VBS subscriptions and GId status +CBCS	298
11.4	Informative examples	298
12	Commands for USIM application toolkit.....	299
12.1	General	299
12.2	Commands specific to MTs supporting USAT	299
12.2.1	Read USAT profile +CUSATR	299
12.2.2	Write USAT profile +CUSATW	300
12.2.3	Profile download upon start-up +CUSATD.....	301
12.2.4	Activate USAT profile +CUSATA.....	302
12.2.5	Send USAT terminal response +CUSATT	304
12.2.6	Send USAT envelope command +CUSATE	304
12.3	Informative examples	305
13	Commands for enhanced support of dialling.....	307
13.1	General	307

13.2	Commands for dialling.....	307
13.2.1	Dial URI +CDU	307
13.2.2	Dial URI from phonebook +CDUP	310
13.2.3	Hangup of current calls +CHCCS.....	311
13.2.4	Define media profile +CDEFMP	312
13.2.5	Control and modify media description +CCMMD	313
13.3	Informative examples	314
14	Commands for eMBMS configuration.....	318
14.1	General	318
14.2	Commands specific to eMBMS.....	319
14.2.1	eMBMS configuration in MT +CEMBMSCFG	319
14.2.2	eMBMS status reporting in MT +CEMBMSR	320
14.2.3	eMBMS service configuration +CEMBMSSRV	321
14.2.4	Enter eMBMS data state +CEMBMSDATA.....	322
14.2.5	eMBMS counting procedure +CEMBMSCNT.....	322
14.2.6	eMBMS Service Area Identities +CEMBMSSAI.....	323
15	Commands for UE test loop function.....	324
15.1	General	324
15.2	Activate Test Mode +CATM.....	324
15.3	Close UE Test Loop E +CCUTLE	325
15.4	UE Sidelink Packet Counter Request +CUSPCREQ	326
Annex A (normative):	Summary of commands from other standards	327
Annex B (normative):	Summary of result codes	329
Annex C (informative):	Commands from TTA IS-101	332
C.1	Introduction	332
C.2	Commands.....	333
C.2.1	Select mode +FCLASS	333
C.2.2	Buffer threshold setting +VBT	333
C.2.3	Calling number ID presentation +VCID	334
C.2.4	Receive gain selection +VGR	334
C.2.5	Transmit gain selection +VGT	334
C.2.6	Initialise voice parameters +VIP	335
C.2.7	Inactivity timer +VIT	335
C.2.8	Line selection +VLS.....	335
C.2.9	Receive data state +VRX	337
C.2.10	Select compression method +VSM	337
C.2.11	DTMF and tone generation +VTS.....	338
C.2.12	Tone duration +VTD	338
C.2.13	Transmit data state +VTX	339
Annex D (informative):	Bibliography.....	340
Annex E (informative):	Mobile originated alternating voice/data call example.....	341
Annex F (informative):	Mobile terminated voice followed by data call example.....	342
Annex G (informative):	Voice call example.....	343
Annex H (informative):	Change history	344
History		351

Foreword

This Technical Specification (TS) has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

iTeh STANDARD PREVIEW
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/52486ca0-fc36-4451-9b8a-cf2faabbbed3/etsi-ts-127-007-v14.5.0-2017-10>

1 Scope

The present document specifies a profile of AT commands and recommends that this profile be used for controlling Mobile Termination (MT) functions and GSM/UMTS network services from a Terminal Equipment (TE) through Terminal Adaptor (TA). The command prefix +C is reserved for Digital Cellular in ITU-T Recommendation V.250 [14]. The present document has also the syntax details used to construct these extended GSM/UMTS commands. Commands from ITU-T Recommendation V.250 [14] and existing digital cellular standards (TIA IS-99 [15] and TIA IS-135 [16]) are used whenever applicable. Some of the new commands are defined such way that they can be easily applied to MT of networks other than GSM/UMTS. ITU-T Recommendation T.31 [11] and ITU-T Recommendation T.32 [12] fax AT commands may be used for GSM/UMTS fax transmission from TE. GSM/UMTS Short Message Service AT commands are defined in 3GPP TS 27.005 [24]. AT commands for GPRS and EPC are defined in clause 10 of this specification. The present document assumes an abstract architecture comprising a TE (e.g. a computer) and a MT interfaced by a TA (see figure 1). The span of control of the defined commands should allow handling of any physical implementation that this abstract architecture may lead to:

- TA, MT and TE as three separate entities;
- TA integrated under the MT cover, and the TE implemented as a separate entity;
- TA integrated under the TE cover, and the MT implemented as a separate entity; and
- TA and MT integrated under the TE cover as a single entity.

The commands described in the present document may be observed on the link between the TE and the TA. However, most of the commands retrieve information about the MT, not about the TA.

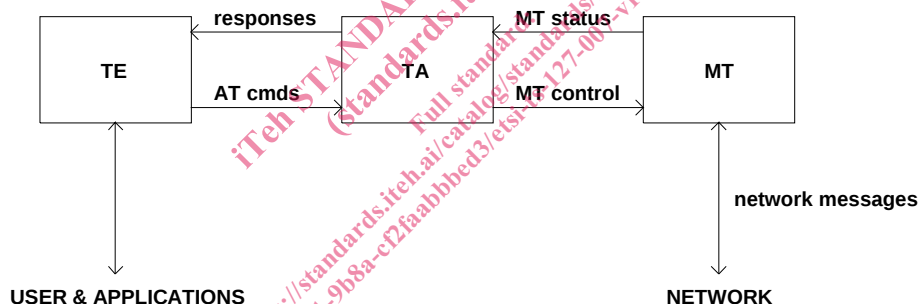


Figure 1: Setup

Interface between TE and TA is intended to operate over existing serial (ITU-T Recommendation V.24) cables, infrared link, and all link types with similar behaviour. For correct operation many of the defined commands require eight bit data and therefore it is recommended that TE-TA link is set to eight bits/ byte mode. (For infrared operation implementation, refer informative references IrDA. For embedding AT commands and data during on-line data state, refer TIA-617/ITU-T V.80.) Interface between TA and MT is dependent on the interface in the MT.

The functional blocks shown in figure 1, using AT commands, shall follow the principles described in the interactions handling framework 3GPP TS 23.227 [63].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.

- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TS 22.002: "Bearer Services (BS) supported by a GSM Public Land Mobile Network (PLMN)".
- [2] 3GPP TS 22.003: "Teleservices supported by a GSM Public Land Mobile Network (PLMN)".
- [3] 3GPP TS 22.081: "Line identification supplementary services - Stage 1".
- [4] 3GPP TS 22.082: "Call Forwarding (CF) supplementary services - Stage 1".
- [5] 3GPP TS 22.083: "Call Waiting (CW) and Call Hold (HOLD) supplementary services - Stage 1".
- [6] 3GPP TS 22.088: "Call Barring (CB) supplementary services - Stage 1".
- [7] 3GPP TS 23.003: "Numbering, addressing and identification".
- [8] 3GPP TS 24.008: "Mobile Radio Interface Layer 3 specification; Core Network Protocols- Stage 3".
- [9] GSM MoU SE.13, GSM MoU Permanent Reference Document SE.13: "GSM Mobile Network Codes and Names".
- [10] ITU-T Recommendation E.212: "Identification plan for land mobile stations".
- [11] ITU-T Recommendation T.31: "Asynchronous facsimile DCE control, service class 1".
- [12] ITU-T Recommendation T.32: "Asynchronous facsimile DCE control, service class 2".
- [13] ITU-T Recommendation T.50: "International Reference Alphabet (IRA) (Formerly International Alphabet No. 5 or IA5) - Information technology - 7-bit coded character set for information exchange".
- [14] ITU-T Recommendation V.250: "Serial asynchronous automatic dialling and control".
- [15] TIA IS-99: "Data Services Option Standard for Wideband Spread Spectrum Digital Cellular System".
- [16] TIA IS-135: "800 MHz Cellular Systems, TDMA Services, Async Data and Fax".
- [17] PCCA STD-101 Data Transmission Systems and Equipment: "Serial Asynchronous Automatic Dialling and Control for Character Mode DCE on Wireless Data Services".
- [18] 3GPP TS 24.022: "Radio Link Protocol (RLP) for data and telematic services on the Mobile Station - Base Station System (MS - BSS) interface and the Base Station System - Mobile-services Switching Centre (BSS - MSC) interface".
- [19] 3GPP TS 22.030: "Man Machine Interface (MMI) of the Mobile Station (MS)".
- [20] 3GPP TS 45.008: "Radio subsystem link control".
- [21] 3GPP TS 22.085: "Closed User Group (CUG) supplementary services - Stage 1".
- [22] 3GPP TS 22.084: "MultiParty (MPTY) supplementary services - Stage 1".
- [23] 3GPP TS 22.090: "Unstructured Supplementary Service Data (USSD) - Stage 1".
- [24] 3GPP TS 27.005: "Use of Data Terminal Equipment - Data Circuit terminating Equipment (DTE - DCE) interface for Short Message Service (SMS) and Cell Broadcast Service (CBS)".
- [25] 3GPP TS 23.038: "Alphabet and language specific information".
- [26] 3GPP TS 22.024: "Description of Charge Advice Information (CAI)".
- [27] 3GPP TS 22.086: "Advice of Charge (AoC) supplementary services - Stage 1".

- [28] 3GPP TS 51.011: "Specification of the Subscriber Identity Module - Mobile Equipment (SIM-ME) interface".
- [29] 3GPP TS 22.034: "High Speed Circuit Switched Data (HSCSD) - Stage 1".
- [30] 3GPP TS 22.091: "Explicit Call Transfer (ECT) supplementary service - Stage 1".
- [31] 3GPP TS 22.072: "Call Deflection (CD) supplementary service - Stage 1".
- [32] ISO/IEC 10646: "Universal Multiple-Octet Coded Character Set (UCS)"; UCS2, 16 bit coding.
- [33] 3GPP TS 22.022: "Personalization of GSM Mobile Equipment (ME) Mobile functionality specification".
- [34] 3GPP TS 27.060: "General requirements on Mobile Stations (MS) supporting General Packet Radio Bearer Service (GPRS)".
- [35] Void.
- [36] CCITT Recommendation V.120: "Support by an ISDN of data terminal equipment with V-Series type interfaces with provision for statistical multiplexing".
- [37] Void.
- [38] 3GPP TS 45.005: "Radio transmission and reception".
- [39] 3GPP TS 29.061: "Interworking between the Public Land Mobile Network (PLMN) supporting GPRS and Packet Data Networks (PDN)".
- [40] 3GPP TS 23.081: "Line identification supplementary services - Stage 2".
- [41] 3GPP TS 27.001: "General on Terminal Adaptation Functions (TAF) for Mobile Stations (MS)".
- [42] 3GPP TS 29.007: "General requirements on interworking between the Public Land Mobile Network (PLMN) and the Integrated Services Digital Network (ISDN) or Public Switched Telephone Network (PSTN)".
- [43] Infrared Data Association; Specification of Ir Mobile Communications (IrMC).
- [44] IrDA Object Exchange Protocol.
- [45] 3GPP TS 27.010: "Terminal Equipment to User Equipment (TE-UE) multiplexer protocol User Equipment (UE)".
- [46] 3GPP TS 23.107: "Quality of Service, Concept and Architecture".
- [47] 3GPP TS 23.060: "General Packet Radio Service (GPRS) Service description; Stage 2".
- [48] Void.
- [49] 3GPP TS 43.068: "Voice Group Call service (VGCS) - Stage 2".
- [50] 3GPP TS 43.069: "Voice Broadcast Service (VBS) - Stage 2".
- [51] Void.
- [52] 3GPP TS 44.068: "Voice Group Call service (VGCS) - Stage 3".
- [53] 3GPP TS 44.069: "Voice Broadcast Service (VBS) - Stage 3".
- [54] 3GPP TS 22.067: "enhanced Multi-Level Precedence and Pre-emption service (eMLPP) - Stage 1".
- [55] 3GPP TS 42.068: "Voice Group Call service (VGCS) - Stage 1".
- [56] 3GPP TS 42.069: "Voice Broadcast Service (VBS) - Stage 1".
- [57] Void.