

INTERNATIONAL
STANDARD

ISO/IEC
14776-342

First edition
2000-06

Information technology –
Small Computer System Interface –

Part 342: **STANDARD PREVIEW**
Controller Commands-2 (SCC-2)
(standards.iteh.ai)

[ISO/IEC 14776-342:2000](https://standards.iteh.ai/catalog/standards/sist/370c783f-fbbb-404c-8b1e-40beaa8f7687/iso-iec-14776-342-2000)

<https://standards.iteh.ai/catalog/standards/sist/370c783f-fbbb-404c-8b1e-40beaa8f7687/iso-iec-14776-342-2000>



Reference number
ISO/IEC 14776-342:2000(E)

PATENT STATEMENT

The International Organization for Standardization (ISO) and International Electrotechnical Commission (IEC) draw attention to the fact that it is claimed that compliance with this International Standard may involve the use of patents concerning SCC-2.

The ISO and IEC take no position concerning the evidence, validity and scope of the patent rights. The holder of the putative patent rights has assured the ISO and IEC that they are willing to negotiate licences under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holder of the putative patent rights is registered with the ISO and IEC. Information may be obtained from:

IBM Corporation
Intellectual Property Licensing
5600 Cottle Road
San Jose, CA 95153

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights other than those identified above. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO/IEC 14776-342:2000](https://standards.iteh.ai/catalog/standards/sist/370c783f-fbbb-404c-8b1e-40beaa8f7687/iso-iec-14776-342-2000)

<https://standards.iteh.ai/catalog/standards/sist/370c783f-fbbb-404c-8b1e-40beaa8f7687/iso-iec-14776-342-2000>

INTERNATIONAL STANDARD

ISO/IEC 14776-342

First edition
2000-06

Information technology – Small Computer System Interface –

Part 342: **Controller Commands-2 (SCC-2)**

<https://standards.iteh.ai/catalog/standards/sist/370c783f-fbbb-404c-8b1e-40beaa8f7687/iso-iec-14776-342-2000>

© ISO/IEC 2000

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

ISO/IEC Copyright Office • Case postale 56 • CH-1211 Genève 20 • Switzerland



PRICE CODE **XC**

For price, see current catalogue

Contents

	Page
Foreword	ix
Introduction	x
1 Scope	1
2 Normative references	1
3 Definitions, symbols, abbreviations, and conventions	1
3.1 Definitions	1
3.2 Symbols and abbreviations	4
3.3 Keywords	4
3.4 Conventions	5
4 General	6
5 Models for systems containing arrays of devices	7
5.1 Model overview	7
5.2 System layering model	7
5.2.1 SACL functions	7
5.2.2 Protocol conversion layer	8
5.2.3 Storage array conversion layer (SACL)	9
5.2.4 Examples of system layering variations	10
5.2.5 Branch of generic layers	11
5.2.6 Software SACL with a branch of SCSI disks	12
5.2.7 Branch with HBA SACL	13
5.2.8 Branch with bridge controller SACL	14
5.2.9 Branch with SACLs in multiple layers	15
5.3 Model for SCSI storage arrays	15
5.3.1 SCSI storage array addressing	16
5.3.1.1 SCSI storage array LUN_Z address	16
5.3.1.2 Direct addressing	16
5.3.1.2.1 Eight byte LUN structure	16
5.3.1.2.2 Logical unit address method	18
5.3.1.2.3 Peripheral device address method	18
5.3.1.2.4 Volume set address method	19
5.3.1.3 Indirect addressing	20
5.3.1.3.1 Component device address method	20
5.3.1.3.2 Logical unit address method	20
5.3.1.3.3 Peripheral device address method	20
5.3.1.3.4 Redundancy group address method	21
5.3.1.3.5 Spare address method	21
5.3.1.3.6 Volume set address method	21
5.3.2 SCSI storage array objects	21
5.3.2.1 Adding objects	22
5.3.2.2 Association of objects	22
5.3.2.3 Attachment of objects	22
5.3.2.4 Covering of objects	22
5.3.2.5 Exchanging objects	23
5.3.2.6 Protected objects	23
5.3.2.7 Removing objects	23
5.3.2.8 Component device	23
5.3.2.9 Peripheral device	23
5.3.2.10 P_extent	24
5.3.2.11 Ps_extent	24
5.3.2.12 Redundancy group	24
5.3.2.12.1 No redundancy method of check data mapping	28
5.3.2.12.2 Copy redundancy method of check data mapping	28

5.3.2.12.3 XOR or P+Q redundancy method of check data mapping	28
5.3.2.12.4 S redundancy method of check data mapping	28
5.3.2.12.5 P+S redundancy method of check data mapping	28
5.3.2.12.6 Vendor specific redundancy method of check data mapping	29
5.3.2.13 Spares	29
5.3.2.14 Volume sets	30
5.3.3 SCSI storage array operations	35
5.3.3.1 Deassign LUN_V operation	35
5.3.3.2 Rebuild operation	35
5.3.3.3 Recalculate operation	35
5.3.3.4 Regenerate operation	35
5.3.3.5 Verify operation	35
5.3.4 SCSI storage array states	35
5.3.5 SCSI storage array configuration options	36
5.3.5.1 Simple configuration method	36
5.3.5.2 Basic configuration method	36
5.3.5.3 General configuration method	37
5.3.6 SCSI storage array exception conditions	38
6 Commands for SCSI storage array devices	39
6.1 Op codes for SCSI storage array commands	39
6.2 Glossary of SCSI storage array service actions	39
6.2.1 MAINTENANCE (IN) command service actions	39
6.2.1.11 MAINTENANCE (OUT) command service actions	40
6.2.1.20 REDUNDANCY GROUP (IN) command service actions	40
6.2.1.24 REDUNDANCY GROUP (OUT) command service actions	41
6.2.1.33 SPARE (IN) command service actions	41
6.2.1.36 SPARE (OUT) command service actions	41
6.2.1.40 VOLUME SET (IN) command service actions	41
6.2.1.45 VOLUME SET (OUT) command service actions	41
6.3 MAINTENANCE(IN) command	43
6.3.1 MAINTENANCE(IN) command service actions	43
6.3.1.1 REPORT ASSIGNED/UNASSIGNED P_EXTENT service action	43
6.3.1.2 REPORT COMPONENT DEVICE service action	46
6.3.1.3 REPORT COMPONENT DEVICE ATTACHMENTS service	49
6.3.1.4 REPORT DEVICE IDENTIFICATION service action	52
6.3.1.5 REPORT PERIPHERAL DEVICE service action	53
6.3.1.6 REPORT PERIPHERAL DEVICE ASSOCIATIONS service action	55
6.3.1.7 REPORT PERIPHERAL DEVICE/COMPONENT DEVICE IDENTIFIER service action	57
6.3.1.8 REPORT STATES service action	59
6.3.1.9 REPORT SUPPORTED CONFIGURATION METHOD service action	66
6.3.1.10 REPORT UNCONFIGURED CAPACITY service action	68
6.4 MAINTENANCE (OUT) commands	70
6.4.1 MAINTENANCE (OUT) command service actions	70
6.4.1.1 ADD PERIPHERAL DEVICE/COMPONENT DEVICE service action	70
6.4.1.2 ATTACH TO COMPONENT DEVICE service action	71
6.4.1.3 BREAK PERIPHERAL DEVICE/COMPONENT DEVICE service action	73
6.4.1.4 EXCHANGE P_EXTENT service action	74
6.4.1.5 EXCHANGE PERIPHERAL DEVICE/COMPONENT DEVICE service action	75
6.4.1.6 INSTRUCT COMPONENT DEVICE service action	76
6.4.1.7 REMOVE PERIPHERAL DEVICE/COMPONENT DEVICE service action	77
6.4.1.8 SET PERIPHERAL DEVICE/COMPONENT DEVICE IDENTIFIER service action	78
6.5 REDUNDANCY GROUP (IN) command	80
6.5.1 REDUNDANCY GROUP (IN) command service actions	80
6.5.1.1 REPORT BASIC REDUNDANCY GROUP service action	80
6.5.1.2 REPORT REDUNDANCY GROUPS service action	83
6.5.1.3 REPORT UNASSIGNED REDUNDANCY GROUP SPACE service action	87
6.6 REDUNDANCY GROUP (OUT) command	90
6.6.1 REDUNDANCY GROUP (OUT) command service actions	90
6.6.1.1 CONTROL GENERATION OF CHECK DATA service action	91
6.6.1.2 CREATE/MODIFY BASIC REDUNDANCY GROUP service action	92

6.6.1.3 CREATE/MODIFY REDUNDANCY GROUP service action	97
6.6.1.4 DELETE REDUNDANCY GROUP service action	101
6.6.1.5 REBUILD P_EXTENT service action	102
6.6.1.6 REBUILD PERIPHERAL DEVICE service action	105
6.6.1.7 RECALCULATE CHECK DATA service action	108
6.6.1.8 VERIFY CHECK DATA service action	109
6.7 VOLUME SET (IN) command	112
6.7.1 VOLUME SET (IN) command service actions	112
6.7.1.1 REPORT BASIC VOLUME SET service action	112
6.7.1.2 REPORT STORAGE ARRAY CONFIGURATION service action	115
6.7.1.3 REPORT UNASSIGNED VOLUME SETS service action	118
6.7.1.4 REPORT VOLUME SETS service action	120
6.8 VOLUME SET (OUT) command	123
6.8.1 VOLUME SET (OUT) command service actions	123
6.8.1.1 ASSIGN LUN_V service action	124
6.8.1.2 CONTROL GENERATION OF CHECK DATA service action	126
6.8.1.3 CONTROL WRITE OPERATIONS service action	127
6.8.1.4 CREATE/MODIFY BASIC VOLUME SET service action	128
6.8.1.5 CREATE/MODIFY STORAGE ARRAY CONFIGURATION service action	133
6.8.1.6 CREATE/MODIFY VOLUME SET service action	138
6.8.1.7 DEASSIGN LUN_V service action	142
6.8.1.8 DELETE VOLUME SET service action	143
6.8.1.9 RECALCULATE VOLUME SET CHECK DATA service action	144
6.8.1.10 VERIFY VOLUME SET CHECK DATA service action	146
6.9 SPARE (IN) command	149
6.9.1 SPARE (IN) command service actions	149
6.9.1.1 REPORT P_EXTENT SPARE service action	149
6.9.1.2 REPORT PERIPHERAL DEVICE/COMPONENT DEVICE SPARE service action	152
6.10 SPARE (OUT) command	155
6.10.1 SPARE (OUT) command service actions	155
6.10.1.1 CREATE/MODIFY P_EXTENT SPARE service action	156
6.10.1.2 CREATE/MODIFY PERIPHERAL DEVICE/COMPONENT DEVICE SPARE service action ...	159
6.10.1.3 DELETE SPARE service action	161
6.11 Parameters for storage array devices	163
6.11.1 Mode parameters	163
6.11.1.1 LUN mapping page	163
Annex A (normative) SCSI storage array IDENTIFY message format	165
A.1 SCSI storage array IDENTIFY message overview	165
A.2 IDENTIFY message	165
Annex B (informative) SCSI storage array addressing examples	166
B.1 SCSI storage array addressing examples overview	166
B.2 Addressing Examples for the 8-byte LUN structure	166
B.3 Addressing Examples for the 6-bit LUN structure	169
Annex C (informative) Examples of check data and user data mappings	170
C.1 Example P+S redundancy mapping	170
C.2 Example XOR redundancy mapping	170
C.3 User data mapping examples	171
Annex D (informative) Example of a SCSI storage array configuration using a CREATE/MODIFY ARRAY CONFIGURATION service action	175
D.1 Example	175

Tables

	Page
1 Addressing methods within a SCSI storage array	16
2 Eight byte LUN structure adjustments	17
3 Eight byte LUN structure	17
4 FIRST LEVEL ADDRESSING field, SECOND LEVEL ADDRESSING field, THIRD LEVEL ADDRESSING field, and FOURTH LEVEL ADDRESSING field	18
5 ADDRESS METHOD	18
6 Logical unit addressing	18
7 Peripheral device addressing	19
8 Volume set addressing	20
9 Component device address	20
10 Redundancy group address	21
11 Spare address	21
12 Commands for SCSI storage array devices	39
13 Service actions for MAINTENANCE(IN) command	43
14 REPORT ASSIGNED/UNASSIGNED P_EXTENT service action	44
15 REPORT ASSIGNED/UNASSIGNED P_EXTENT parameter list	45
16 Data format of ASSIGNED/UNASSIGNED P_EXTENT DESCRIPTOR	45
17 Data format of P_EXTENT DESCRIPTOR	46
18 REPORT COMPONENT DEVICE service action	47
19 REPORT COMPONENT DEVICE parameter list	48
20 Data format of COMPONENT DEVICE DESCRIPTOR	48
21 COMPONENT DEVICE TYPES	49
22 REPORT COMPONENT DEVICE ATTACHMENTS service action	49
23 REPORT COMPONENT DEVICE ATTACHMENTS parameter list	50
24 Format of COMPONENT DEVICE ATTACHMENT DESCRIPTOR	51
25 Data format of LOGICAL UNIT DESCRIPTOR	51
26 LOGICAL UNIT types	52
27 REPORT DEVICE IDENTIFICATION service action	52
28 REPORT PERIPHERAL DEVICE service action	53
29 SELECT REPORT	54
30 REPORT PERIPHERAL DEVICE parameter list	54
31 Format of PERIPHERAL DEVICE DESCRIPTOR	55
32 REPORT PERIPHERAL DEVICE ASSOCIATIONS service action	55
33 REPORT PERIPHERAL DEVICE ASSOCIATIONS parameter list	56
34 Format of PERIPHERAL DEVICE ASSOCIATIONS DESCRIPTOR	57
35 REPORT PERIPHERAL DEVICE/COMPONENT DEVICE IDENTIFIER service action	58
36 REPORT PERIPHERAL DEVICE/COMPONENT DEVICE IDENTIFIER parameter list	58
37 REPORT STATES service action	59
38 REPORT STATES	60
39 REPORT STATES parameter list	60
40 Format of LOGICAL UNIT STATES DESCRIPTORS	61
41 LUN_Z states	62
42 Volume set states	63
43 Redundancy group states	64
44 Peripheral device and p_extent states	65
45 Spare states	65
46 Component device states	66
47 REPORT SUPPORTED CONFIGURATION METHOD service action	67
48 REPORT SUPPORTED CONFIGURATIN METHOD parameter list	67
49 SIMPLE	68
50 BASIC	68
51 GENERAL	68
52 REPORT UNCONFIGURED CAPACITY service action	69
53 REPORT UNCONFIGURED CAPACITY parameter list	69
54 Service actions for MAINTENANCE (OUT) command	70
55 ADD PERIPHERAL DEVICE/COMPONENT DEVICE service action	71
56 ATTACH COMPONENT DEVICE service actions	72
57 ATTACH COMPONENT DEVICE parameter list	73
58 BREAK PERIPHERAL DEVICE/COMPONENT DEVICE service action	73

59 EXCHANGE P_EXTENT service action	74
60 EXCHANGE P_EXTENT parameters list	75
61 EXCHANGE PERIPHERAL DEVICE/COMPONENT DEVICE Service Action	75
62 INSTRUCT COMPONENT DEVICE service action	76
63 COMPONENT DEVICE INSTRUCTION field	77
64 INSTRUCT COMPONENT DEVICE parameter list	77
65 REMOVE PERIPHERAL DEVICE/COMPONENT DEVICE service action	78
66 SET PERIPHERAL DEVICE/COMPONENT DEVICE IDENTIFIER service action	79
67 SET PERIPHERAL DEVICE/COMPONENT DEVICE IDENTIFIER parameter list	79
68 Service actions for REDUNDANCY GROUP (IN) command	80
69 REPORT BASIC REDUNDANCY GROUP service action	80
70 REPORT BASIC REDUNDANCY parameter list	81
71 REDUNDANCY GROUP METHODS	82
72 REDUNDANCY GROUP PERIPHERAL DEVICE DESCRIPTOR	82
73 REPORT REDUNDANCY GROUPS service action	83
74 REPORT REDUNDANCY GROUPS parameter list	84
75 Format of REPORT REDUNDANCY GROUP DESCRIPTOR	85
76 GRANULARITY OF UNITS	85
77 REDUNDANCY GROUP P_EXTENT DESCRIPTOR	86
78 REPORT UNASSIGNED REDUNDANCY GROUP SPACE service action	87
79 REPORT UNASSIGNED REDUNDANCY GROUP SPACE parameter list	88
80 Format of REPORT UNASSIGNED REDUNDANCY GROUP SPACE DESCRIPTOR	89
81 Data format of PS_EXTENT DESCRIPTOR	90
82 Service actions for REDUNDANCY GROUP (OUT) command	91
83 CONTROL GENERATION OF CHECK DATA service action	91
84 CREATE/MODIFY BASIC REDUNDANCY GROUP service action	93
85 Minimum redundancy group protection	93
86 CONFIGURE	94
87 CREATE/MODIFY	95
88 CREATE/MODIFY BASIC REDUNDANCY GROUP parameter list	96
89 Data format of CREATE/MODIFY PERIPHERAL DEVICE DESCRIPTOR	97
90 CREATE/MODIFY REDUNDANCY GROUP service action	98
91 CREATE/MODIFY	99
92 CREATE/MODIFY REDUNDANCY GROUP parameter list	99
93 Data format of CREATE/MODIFY P_EXTENT DESCRIPTOR	100
94 DELETE REDUNDANCY GROUP service action	102
95 REBUILD P_EXTENT service action	103
96 Rebuild types	104
97 REBUILD P_EXTENT parameter list	105
98 REBUILD PERIPHERAL DEVICE service action	106
99 Rebuild types	107
100 REBUILD PERIPHERAL DEVICE parameter list	108
101 RECALCULATE CHECK DATA service action	109
102 VERIFY CHECK DATA service action	110
103 Service actions for volume set (in) command	112
104 REPORT BASIC VOLUME SET service action	112
105 REPORT BASIC VOLUME SET parameter list	113
106 REPORT BASIC VOLUME SET PERIPHERAL DEVICE DESCRIPTOR	114
107 REPORT STORAGE ARRAY CONFIGURATION service action	115
108 REPORT CONFIGURATION parameter list	116
109 Rebuild/recalculate priority selection	117
110 PERCENTAGE OF SEQUENTIAL READ TRANSFERS	117
111 PERCENTAGE OF SEQUENTIAL WRITE TRANSFERS	118
112 VOLUME SET PERIPHERAL DEVICE DESCRIPTOR	118
113 REPORT UNASSIGNED VOLUME SETS service action	119
114 REPORT UNASSIGNED VOLUME SETS parameter list	119
115 Format of REPORT UNASSIGNED VOLUME SET DESCRIPTOR	120
116 REPORT VOLUME SETS service action	120
117 REPORT VOLUME SETS parameter list	121
118 Format of REPORT VOLUME SET DESCRIPTOR	122
119 VOLUME SET PS_EXTENT DESCRIPTOR	123

120	Service actions for VOLUME SET (OUT) command	124
121	ASSIGN LUN_V service action	125
122	ENABLE RANGE	125
123	IDENTIFIER parameter list	126
124	CONTROL GENERATION OF CHECK DATA service action	126
125	CONTROL WRITE OPERATIONS service action	128
126	CREATE/MODIFY BASIC VOLUME SET service action	129
127	CONFIGURE	130
128	CREATE/MODIFY	130
129	CREATE/MODIFY BASIC VOLUME SET parameter list	131
130	Data format of basic Volume set peripheral device descriptor	132
131	CREATE/MODIFY STORAGE ARRAY CONFIGURATION service action	133
132	CONFIGURE	134
133	CREATE/MODIFY	135
134	CREATE/MODIFY STORAGE ARRAY CONFIGURATION parameter list	136
135	Rebuild/recalculate priority selection	137
136	PERCENTAGE OF SEQUENTIAL READ TRANSFERS	137
137	PERCENTAGE OF SEQUENTIAL WRITE TRANSFERS	138
138	Data format of CREATE/MODIFY PERIPHERAL DEVICE DESCRIPTOR	138
139	CREATE/MODIFY VOLUME SET service action	139
140	CREATE/MODIFY	140
141	CREATE/MODIFY VOLUME SET parameter list	141
142	Data format of CREATE/MODIFY PS_EXTENT DESCRIPTOR	142
143	DEASSIGN LUN_V service action	143
144	DELETE VOLUME SET service action	144
145	RECALCULATE VOLUME SET CHECK DATA service action	145
146	RECALCULATE VOLUME SET CHECK DATA parameter list	146
147	VERIFY VOLUME SET CHECK DATA service action	147
148	VERIFY RANGE	147
149	VERIFY VOLUME SET CHECK DATA parameter list	148
150	Service actions for SPARE (IN) command	149
151	REPORT P_EXTENT SPARE service action	149
152	REPORT P_EXTENT SPARE parameter list	150
153	Format of REPORT P_EXTENT SPARE DESCRIPTOR	151
154	REPORT PERIPHERAL DEVICE/COMPONENT DEVICE SPARE service action	152
155	REPORT PERIPHERAL DEVICE/COMPONENT DEVICE SPARE parameter list	153
156	Format of REPORT PERIPHERAL DEVICE/COMPONENT DEVICE SPARE DESCRIPTOR	154
157	Data format of covered LOGICAL UNIT DESCRIPTOR	155
158	LOGICAL UNIT TYPES	155
159	Service actions for spare (out) command	155
160	CREATE/MODIFY P_EXTENT SPARE service action	156
161	COVER	157
162	CREATE/MODIFY	157
163	CREATE/MODIFY P_EXTENT SPARE parameter list	158
164	CREATE/MODIFY PERIPHERAL DEVICE/COMPONENT DEVICE SPARE service action	159
165	COVER	160
166	CREATE/MODIFY	161
167	CREATE/MODIFY PERIPHERAL DEVICE/COMPONENT DEVICE SPARE parameter list	161
168	DELETE SPARE service action	162
169	Mode page codes	163
170	LUN mapping page	164
A.1	IDENTIFY message format	165
D.1	User data stripe depth mapping selection	175
D.2	Rebuild priority selection	176
D.3	Read ahead selection	177

Figures

	Page
1 SCSI document road map	xii
2 Protocol conversion layer	8
3 SACL conversion layer	9
4 Typical system diagram	10
5 Branch of generic layers	11
6 Software SACL with a branch of SCSI disks	12
7 Branch with HBA SACL	13
8 Branch with bridge controller SACL	14
9 Branch with SACLs in multiple layers	15
10 Single redundancy group	25
11 Multiple volume sets associated with a single redundancy group	25
12 Redundancy group check data mapping flow chart	27
13 Multiple redundancy groups	30
14 Single volume set associated with multiple redundancy groups	31
15 Volume set user data mapping flow chart (part 1)	32
16 Volume set user data mapping flow chart (part 2)	33
17 Volume set user data mapping flow	34
C.1 P+S redundancy mapping example	170
C.2 XOR redundancy mapping example (RAID 5)	171
C.3 User data mapping for a RAID 5 configuration (nochkskip = 1)	172
C.4 User data mapping for a RAID 5 configuration (nochkskip = 0)	173
C.5 User data mapping for a RAID 3 configuration	174
D.1 Mapping of user data in volume set example	178

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO/IEC 14776-342:2000](https://standards.iteh.ai/catalog/standards/sist/370c783f-fbbb-404c-8b1e-40beaa8f7687/iso-iec-14776-342-2000)

<https://standards.iteh.ai/catalog/standards/sist/370c783f-fbbb-404c-8b1e-40beaa8f7687/iso-iec-14776-342-2000>

Foreword

ISO (the International Organization of Standardization) and IEC (the International Electrotechnical Commission) form the specialized system for worldwide standardization. National bodies that are members of ISO or IEC participate in the development of international standard through technical committees established by the respective organization to deal with particular fields of technical activity. ISO and IEC technical committees collaborate in fields of mutual interest. Other international organizations, governmental and non-governmental, in liaison with ISO and IEC, also take part in the work.

In the field of information technology, ISO and IEC have established a joint technical committee, ISO/IEC JTC 1. Draft International Standards adopted by the joint technical committee are circulated to national bodies for voting. Publication as an International Standard requires approval by at least 75% of the national bodies casting a vote.

International Standard ISO/IEC 14776-342 was prepared by Joint Technical Committee ISO/IEC JTC 1, Subcommittee SC 25, Interconnection of information technology equipment.

iTeh STANDARD PREVIEW (standards.iteh.ai)

[ISO/IEC 14776-342:2000](https://standards.iteh.ai/catalog/standards/sist/370c783f-fbbb-404c-8b1e-40beaa8f7687/iso-iec-14776-342-2000)

<https://standards.iteh.ai/catalog/standards/sist/370c783f-fbbb-404c-8b1e-40beaa8f7687/iso-iec-14776-342-2000>

Introduction

The SCSI command set is designed to provide efficient peer-to-peer operation of input/output devices (disks, tapes, printers, etc.) by an operating system. The SCSI command set assumes a command-response protocol. Action on SCSI commands shall not be deemed completed until a response is received. The response shall include a status that indicates the final disposition of the command.

The SCSI command set provides multiple operating systems concurrent control over one or more input/output devices. However, the multiple operating systems should properly coordinate their actions or data corruption will result. This standard defines commands that assist with coordination between multiple operating systems. However, details of the coordination are beyond the scope of the SCSI command set.

This standard defines a device model for SCSI storage arrays, commonly known as RAID devices. This standard defines the SCSI commands that may apply to SCSI storage arrays and the SCSI commands that are uniquely for SCSI storage arrays.

This standard is intended to be the choice for new designs over the original SCSI-3 Controller Commands (SCC) standard. Several new high level service actions have been added to this standard that simplify configurations.

The SCSI Controller Commands-2 (SCC-2) standard is divided into six clauses:

- Clause 1 is the scope;
- Clause 2 enumerates the normative references that apply to this standard;
- Clause 3 describes the definitions, symbols and abbreviations used in this standard;
- Clause 4 describes the conceptual relationship between this document and the SCSI-3 Architecture Model;
<https://standards.iteh.ai/catalog/standards/sist/370c783f-fbb-404c-8b1e->
- Clause 5 describes the command and model for SCSI storage array devices;
- Clause 6 defines the commands and parameter data that may be implemented by an SCSI storage array device.

The annexes provide information to assist with implementation of the SCSI Controller Commands-2 standard. Annex A is normative and is considered part of this standard. Annexes B, C, and D are for information only.

Figure 1 is intended to show the general relationship between SCSI standards. The figure is not intended to imply a relationship such as a hierarchy, protocol stack, or system architecture.

CAUTION: The International Organization for Standardization (ISO) and International Electrotechnical Commission (IEC) draws attention to the fact that it is claimed that compliance with this International Standard may involve the use of patents concerning SCC-2.

The ISO and IEC take no position concerning the evidence, validity and scope of the patent rights. The holder of the patent rights has assured the ISO and IEC that they are willing to negotiate licences under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holder of the patent rights is registered with the ISO and IEC. Information may be obtained from:

IBM Corporation
Intellectual Property Licensing
5600 Cottle Road
San Jose, CA 95153

Attention is drawn to the possibility that some of the elements of this International Standard may be the

subject of patent rights other than those identified above. ISO and IEC shall not be held responsible for identifying any or all such patent rights.

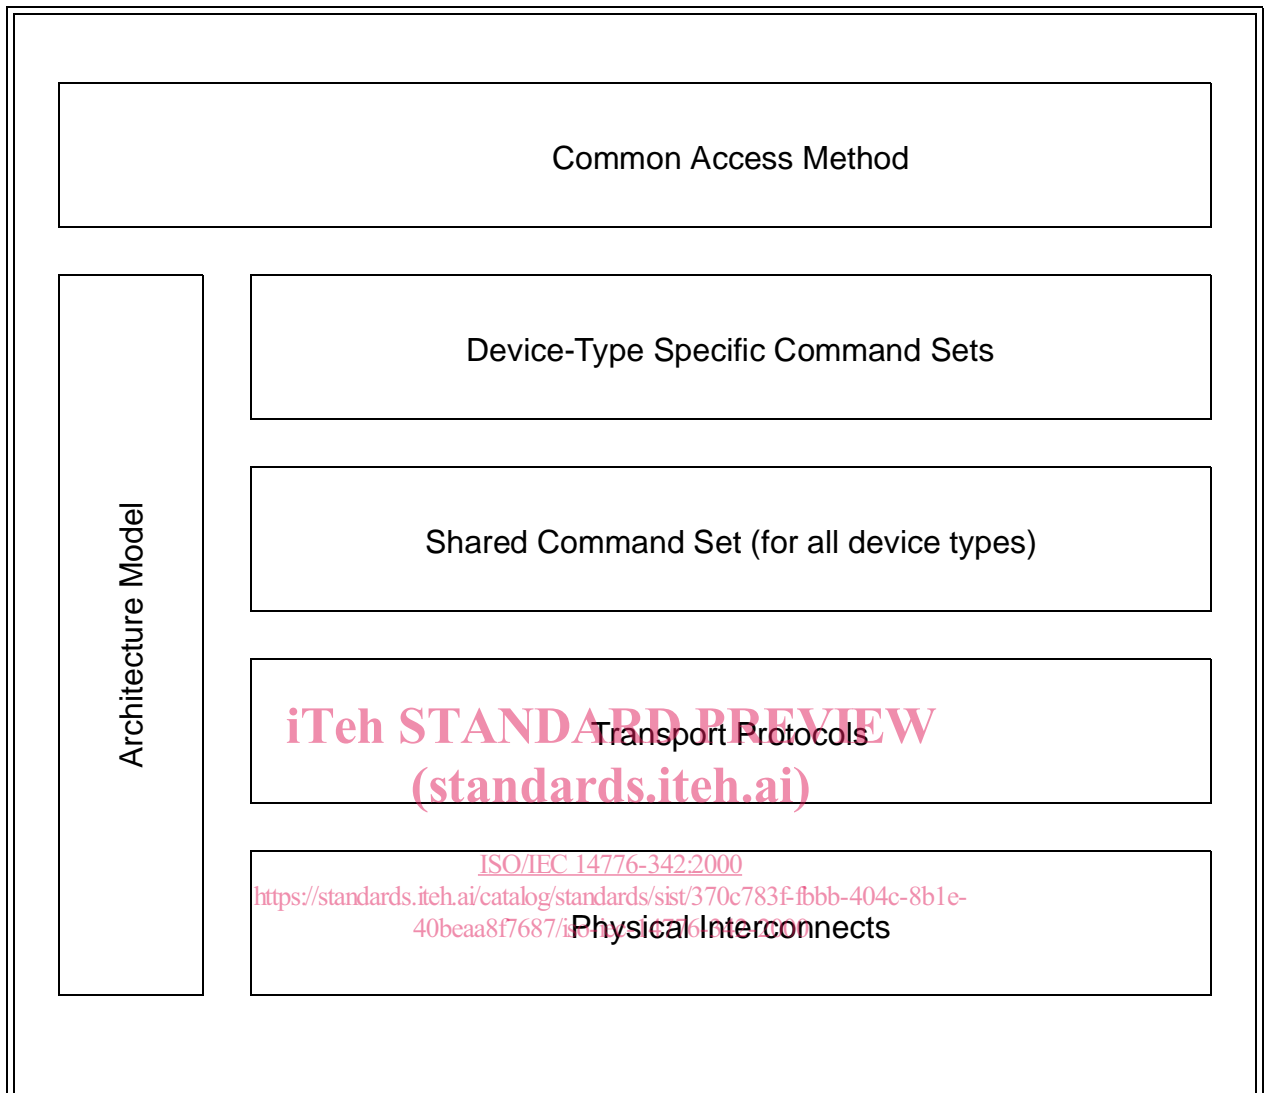


Figure 1 - SCSI document road map

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO/IEC 14776-342:2000](https://standards.iteh.ai/catalog/standards/sist/370c783f-fbbb-404c-8b1e-40beaa8f7687/iso-iec-14776-342-2000)

<https://standards.iteh.ai/catalog/standards/sist/370c783f-fbbb-404c-8b1e-40beaa8f7687/iso-iec-14776-342-2000>

Information technology – Small Computer System Interface – Part 342: Controller Commands-2 (SCC-2)

1 Scope

This International Standard defines the command set extensions for SCSI storage array devices; commonly known as RAID devices. This standard is principally intended to be used in conjunction with, not as an alternate to, any of the SCSI command standards nor to the SCSI-3 Architecture Model (ISO/IEC 14776-411) standard. This international standard is intended as an alternate to the SCSI-3 Controller Command (ISO/IEC 14776-341) standard. The resulting commands facilitate the control and configuration of SCSI storage arrays and thus provide a common command specification for both system integrators and suppliers of SCSI storage array devices.

This international standard contains all the information defined in SCSI-3 Controller Command (ISO/IEC 14776-341) standard. In addition this international standard specifies new commands and an expanded model clause.

The clause(s) of this standard pertaining to the SCSI storage array device class, implemented in conjunction with the applicable clauses within any of the SCSI command standards, shall specify the standard command set available for SCSI storage arrays.

The objective of the SCSI Controller Commands is to provide the following:

- a) Transfer commands unique to SCSI Controller Command devices;
- b) Control commands to manage the operation of an SCSI Controller Command device;
- c) Optional device mapping and pass-through support.

iTeh STANDARD PREVIEW

2 Normative references (standards.iteh.ai)

The following standards contain provisions which, through reference in the text, constitute provisions of this standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this standard are encouraged to investigate the possibility of applying the most recent editions of the standards listed below.

Members of IEC and ISO maintain registers of currently valid standards.

Parts of ISO/IEC 14776:

- SCSI-3 Architecture Model (ISO/IEC 14776-411)
- SCSI-3 Primary Commands (ISO/IEC 14776-311)
- SCSI-3 Interlocked Protocol (ISO/IEC 14776-211)

3 Definitions, symbols, abbreviations, and conventions

3.1 Definitions

For the purposes of this International Standard the following definitions apply.

3.1.1 application client: An object that is the source of SCSI commands. Further definition of an application client can be found in the SCSI-3 Architecture Model (ISO/IEC 14776-411) standard.

3.1.2 assignment: The linking of p_extents to redundancy groups or ps_extents to volume sets as defined within this standard (see 5.3.1.2.2 and 5.3.2.11).

3.1.3 association: The linking of SCSI storage array objects (see 5.3.2) in a manner explicitly defined within this standard (see 5.3.2.2).

3.1.4 attachment: The linking of SCSI storage array objects (see 5.3.2) in a vendor specific manner (see 5.3.2.3).