

ETSI TS 138 300 V15.3.1 (2018-10)



**5G;
NR;
Overall description;
Stage-2
(3GPP TS 38.300 version 15.3.1 Release 15)**



ReferenceRTS/TSGR-0238300vf31

Keywords

5G

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommiteeSupportStaff.aspx>

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2018.

All rights reserved.

DECT™, PLUGTESTS™, UMTS™ and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.

3GPP™ and LTE™ are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

oneM2M logo is protected for the benefit of its Members.

GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights	2
Foreword.....	2
Modal verbs terminology.....	2
Foreword.....	7
1 Scope	8
2 References	8
3 Abbreviations and Definitions.....	9
3.1 Abbreviations	9
3.2 Definitions	10
4 Overall Architecture and Functional Split.....	11
4.1 Overall Architecture	11
4.2 Functional Split	11
4.3 Network Interfaces	13
4.3.1 NG Interface	13
4.3.1.1 NG User Plane	13
4.3.1.2 NG Control Plane.....	14
4.3.2 Xn Interface	15
4.3.2.1 Xn User Plane	15
4.3.2.2 Xn Control Plane.....	15
4.4 Radio Protocol Architecture	16
4.4.1 User Plane.....	16
4.4.2 Control Plane	16
4.5 Multi-RAT Dual Connectivity	16
5 Physical Layer	17
5.1 Waveform, numerology and frame structure.....	17
5.2 Downlink.....	18
5.2.1 Downlink transmission scheme	18
5.2.2 Physical-layer processing for physical downlink shared channel	18
5.2.3 Physical downlink control channels	18
5.2.4 Synchronization signal and PBCH.....	19
5.2.5 Physical layer procedures	20
5.2.5.1 Link adaptation	20
5.2.5.2 Power Control	20
5.2.5.3 Cell search.....	20
5.2.5.4 HARQ	20
5.2.5.5 Reception of SIB1	20
5.3 Uplink.....	20
5.3.1 Uplink transmission scheme	20
5.3.2 Physical-layer processing for physical uplink shared channel	21
5.3.3 Physical uplink control channel	21
5.3.4 Random access.....	22
5.3.5 Physical layer procedures	22
5.3.5.1 Link adaptation	22
5.3.5.2 Uplink Power control	23
5.3.5.3 Uplink timing control.....	23
5.3.5.4 HARQ	23
5.4 Carrier aggregation.....	23
5.4.1 Carrier aggregation	23
5.4.2 Supplementary Uplink	23
5.5 Transport Channels.....	23
6 Layer 2.....	24
6.1 Overview	24
6.2 MAC Sublayer.....	26

6.2.1	Services and Functions	26
6.2.2	Logical Channels	26
6.2.3	Mapping to Transport Channels.....	26
6.2.4	HARQ.....	27
6.3	RLC Sublayer.....	27
6.3.1	Transmission Modes.....	27
6.3.2	Services and Functions	27
6.3.3	ARQ.....	27
6.4	PDCP Sublayer.....	28
6.4.1	Services and Functions	28
6.5	SDAP Sublayer	28
6.6	L2 Data Flow.....	28
6.7	Carrier Aggregation.....	29
6.8	Dual Connectivity.....	30
6.9	Supplementary Uplink.....	30
6.10	Bandwidth Adaptation.....	30
7	RRC.....	31
7.1	Services and Functions	31
7.2	Protocol States.....	31
7.3	System Information Handling	32
7.3.1	Overview	32
7.3.2	Scheduling	33
7.3.3	SI Modification.....	34
7.4	Access Control	34
7.5	UE Capability Retrieval framework.....	34
7.6	Transport of NAS Messages.....	34
7.7	Carrier Aggregation.....	35
7.8	Bandwidth Adaptation.....	35
8	NG Identities	35
8.1	UE Identities.....	35
8.2	Network Identities	36
9	Mobility and State Transitions	36
9.1	Overview	36
9.2	Intra-NR	37
9.2.1	Mobility in RRC_IDLE	37
9.2.1.1	Cell Selection	37
9.2.1.2	Cell Reselection	37
9.2.1.3	State Transitions.....	38
9.2.2	Mobility in RRC_INACTIVE.....	39
9.2.2.1	Overview.....	39
9.2.2.2	Cell Reselection	40
9.2.2.3	RAN-Based Notification Area	40
9.2.2.4	State Transitions.....	41
9.2.2.4.1	UE triggered transition from RRC_INACTIVE to RRC_CONNECTED	41
9.2.2.4.2	Network triggered transition from RRC_INACTIVE to RRC_CONNECTED	42
9.2.2.5	RNA update.....	43
9.2.3	Mobility in RRC_CONNECTED	44
9.2.3.1	Overview	44
9.2.3.2	Handover.....	45
9.2.3.2.1	C-Plane Handling	45
9.2.3.2.2	U-Plane Handling	47
9.2.3.2.3	Data Forwarding.....	48
9.2.3.3	Re-establishment procedure	49
9.2.4	Measurements	50
9.2.5	Paging	52
9.2.6	Random Access Procedure	53
9.2.7	Radio Link Failure	54
9.2.8	Beam failure detection and recovery	54
9.3	Inter RAT	55
9.3.1	Intra 5GC	55

9.3.1.1	Cell Reselection	55
9.3.1.2	Handover	55
9.3.1.3	Measurements	55
9.3.2	From 5GC to EPC	55
9.3.2.1	Cell Reselection	55
9.3.2.2	Handover	55
9.3.2.3	Measurements	56
9.3.2.4	Data Forwarding	56
9.3.3	From EPC to 5GC	56
9.3.3.1	Data Forwarding	56
9.4	Roaming and Access Restrictions	57
10	Scheduling	57
10.1	Basic Scheduler Operation	57
10.2	Downlink Scheduling	57
10.3	Uplink Scheduling	58
10.4	Measurements to Support Scheduler Operation	58
10.5	Rate Control	59
10.5.1	Downlink	59
10.5.2	Uplink	59
10.6	Activation/Deactivation Mechanism	59
10.7	E-UTRA-NR Physical Layer Resource Coordination	60
11	UE Power Saving	60
12	QoS	60
12.1	Overview	60
13	Security	62
13.1	Overview and Principles	62
13.2	Security Termination Points	64
13.3	State Transitions and Mobility	65
14	UE Capabilities	65
15	Self-Configuration and Self-Optimisation	65
15.1	Definitions	65
15.2	UE Support for self-configuration and self-optimisation	65
15.3	Self-configuration	66
15.3.1	Dynamic configuration of the NG-C interface	66
15.3.1.1	Prerequisites	66
15.3.1.2	SCTP initialization	66
15.3.1.3	Application layer initialization	66
15.3.2	Dynamic Configuration of the Xn interface	66
15.3.2.1	Prerequisites	66
15.3.2.2	SCTP initialization	66
15.3.2.3	Application layer initialization	66
15.3.3	Automatic Neighbour Cell Relation Function	67
15.3.3.1	General	67
15.3.3.2	Intra-system – intra NR Automatic Neighbour Cell Relation Function	68
15.3.3.3	Intra-system – intra E-UTRA Automatic Neighbour Cell Relation Function	68
15.3.3.4	Intra-system – inter RAT Automatic Neighbour Cell Relation Function	68
15.3.3.5	Inter-system Automatic Neighbour Cell Relation Function	68
15.3.4	Xn-C TNL address discovery	69
16	Verticals Support	70
16.1	URLLC	70
16.1.1	Overview	70
16.1.2	LCP Restrictions	70
16.1.3	Packet Duplication	70
16.2	IMS Voice	70
16.2.1	Support for MMTEL IMS voice and video enhancements	70
16.2.1.1	RAN-assisted codec adaptation	70
16.2.1.2	MMTEL voice quality/coverage enhancements	71

16.3	Network Slicing.....	71
16.3.1	General Principles and Requirements	71
16.3.2	CN Instance and NW Slice Selection	73
16.3.2.1	CN-RAN interaction and internal RAN aspects.....	73
16.3.2.2	Radio Interface Aspects	73
16.3.3	Resource Isolation and Management	73
16.3.4	Signalling Aspects	73
16.3.4.1	General.....	73
16.3.4.2	CN Instance and NW Slice Selection.....	73
16.3.4.3	UE Context Handling.....	74
16.3.4.4	PDU Session Handling.....	74
16.3.4.5	Mobility.....	75
16.4	Public Warning System.....	76
16.5	Emergency Services	76
16.5.1	Overview	76
16.5.2	IMS Emergency call	76
16.5.3	eCall over IMS.....	77
16.5.4	Fallback	77
Annex A (informative): QoS Handling in RAN		78
A.1	PDU Session Establishment	78
A.2	New QoS Flow with RQoS	78
A.3	New QoS Flow with Explicit RRC Signalling.....	79
A.4	New QoS Flow with Explicit NAS Signalling.....	80
A.5	Release of QoS Flow with Explicit Signalling.....	81
A.6	UE Initiated UL QoS Flow.....	81
Annex B (informative): Deployment Scenarios		83
B.1	Supplementary Uplink.....	83
B.2	Multiple SSBs in a carrier	83
Annex C (informative): I-RNTI Reference Profiles		84
Annex D (informative): Change history.....		85
History		89

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
 - 1 presented to TSG for information;
 - 2 presented to TSG for approval;
 - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

PREVIEW
iTech STANDARD
(standards.iteh.ai)
Full standard:
<https://standards.iteh.ai/catalog/standards/sist/7772dc80-852d-435e-96ae-759304ca5a76/etsi-ts-138-300-v15.3.1-2018-10>

1 Scope

The present document provides an overview and overall description of the NG-RAN and focuses on the radio interface protocol architecture of NR connected to 5GC (E-UTRA connected to 5GC is covered in the 36 series). Details of the radio interface protocols are specified in companion specifications of the 38 series.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 36.300: "Evolved Universal Terrestrial Radio Access (E-UTRA) and Evolved Universal Terrestrial Radio Access Network (E-UTRAN); Overall description; Stage 2".
- [3] 3GPP TS 23.501: "System Architecture for the 5G System; Stage 2".
- [4] 3GPP TS 38.401: "NG-RAN; Architecture description".
- [5] 3GPP TS 33.501: "Security Architecture and Procedures for 5G System".
- [6] 3GPP TS 38.321: "NR; Medium Access Control (MAC) protocol specification".
- [7] 3GPP TS 38.322: "NR; Radio Link Control (RLC) protocol specification".
- [8] 3GPP TS 38.323: "NR; Packet Data Convergence Protocol (PDCP) specification".
- [9] 3GPP TS 37.324: "NR; Service Data Protocol (SDAP) specification".
- [10] 3GPP TS 38.304: "NR; User Equipment (UE) procedures in idle mode".
- [11] 3GPP TS 38.306: "NR; User Equipment (UE) radio access capabilities".
- [12] 3GPP TS 38.331: "NR; Radio Resource Control (RRC); Protocol specification".
- [13] 3GPP TS 38.133: "NR; Requirements for support of radio resource management".
- [14] 3GPP TS 22.168: "Earthquake and Tsunami Warning System (ETWS) requirements; Stage 1".
- [15] 3GPP TS 22.268: "Public Warning System (PWS) Requirements".
- [16] 3GPP TS 38.410: "NG-RAN; NG general aspects and principles".
- [17] 3GPP TS 38.420: "NG-RAN; Xn general aspects and principles".
- [18] 3GPP TS 38.101: "NR; User Equipment (UE) radio transmission and reception".
- [19] 3GPP TS 22.261: "Service requirements for next generation new services and markets".
- [20] 3GPP TS 38.202: "NR; Physical layer services provided by the physical layer"
- [21] 3GPP TS 37.340: "NR; Multi-connectivity; Overall description; Stage-2".
- [22] 3GPP TS 23.502: "Procedures for the 5G System; Stage 2".

- [23] IETF RFC 4960 (2007-09): "Stream Control Transmission Protocol".
- [24] 3GPP TS 26.114: "Technical Specification Group Services and System Aspects; IP Multimedia Subsystem (IMS); Multimedia Telephony; Media handling and interaction".
- [25] Void.
- [26] 3GPP TS 38.413: "NG-RAN; NG Application Protocol (NGAP)".

3 Abbreviations and Definitions

3.1 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1], in 3GPP TS 36.300 [2] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1] and 3GPP TS 36.300 [2].

5GC	5G Core Network
5QI	5G QoS Identifier
A-CSI	Aperiodic CSI
AKA	Authentication and Key Agreement
AMBR	Aggregate Maximum Bit Rate
AMC	Adaptive Modulation and Coding
AMF	Access and Mobility Management Function
ARP	Allocation and Retention Priority
BA	Bandwidth Adaptation
BCH	Broadcast Channel
BPSK	Binary Phase Shift Keying
C-RNTI	Cell RNTI
CBRA	Contention Based Random Access
CCE	Control Channel Element
CD-SSB	Cell Defining SSB
CFRA	Contention Free Random Access
CMAS	Commercial Mobile Alert Service
CORESET	Control Resource Set
DFT	Discrete Fourier Transform
DCI	Downlink Control Information
DL-SCH	Downlink Shared Channel
DMRS	Demodulation Reference Signal
DRX	Discontinuous Reception
ETWS	Earthquake and Tsunami Warning System
GFBR	Guaranteed Flow Bit Rate
I-RNTI	Inactive RNTI
INT-RNTI	Interruption RNTI
LDPC	Low Density Parity Check
MDBV	Maximum Data Burst Volume
MICO	Mobile Initiated Connection Only
MFBR	Maximum Flow Bit Rate
MMTEL	Multimedia telephony
MNO	Mobile Network Operator
MU-MIMO	Multi User MIMO
NCGI	NR Cell Global Identifier
NCR	Neighbour Cell Relation
NCRT	Neighbour Cell Relation Table
NGAP	NG Application Protocol
NR	NR Radio Access
P-RNTI	Paging RNTI
PCH	Paging Channel
PCI	Physical Cell Identifier
PDCCH	Physical Downlink Control Channel
PDSCH	Physical Downlink Shared Channel

PO	Paging Occasion
PRACH	Physical Random Access Channel
PRB	Physical Resource Block
PRG	Precoding Resource block Group
PSS	Primary Synchronisation Signal
PUCCH	Physical Uplink Control Channel
PUSCH	Physical Uplink Shared Channel
PWS	Public Warning System
QAM	Quadrature Amplitude Modulation
QFI	QoS Flow ID
QPSK	Quadrature Phase Shift Keying
RA-RNTI	Random Access RNTI
RACH	Random Access Channel
RANAC	RAN-based Notification Area Code
REG	Resource Element Group
RMSI	Remaining Minimum SI
RNA	RAN-based Notification Area
RNAU	RAN-based Notification Area Update
RNTI	Radio Network Temporary Identifier
RQA	Reflective QoS Attribute
RQoS	Reflective Quality of Service
RS	Reference Signal
RSRP	Reference Signal Received Power
RSRQ	Reference Signal Received Quality
SD	Slice Differentiator
SDAP	Service Data Adaptation Protocol
SFI-RNTI	Slot Format Indication RNTI
SI-RNTI	System Information RNTI
SLA	Service Level Agreement
SMC	Security Mode Command
SMF	Session Management Function
S-NSSAI	Single Network Slice Selection Assistance Information
SPS	Semi-Persistent Scheduling
SRS	Sounding Reference Signal
SS	Synchronization Signal
SSB	Synchronization Signal and PBCH block
SSS	Secondary Synchronisation Signal
SST	Slice/Service Type
SU-MIMO	Single User MIMO
SUL	Supplementary Uplink
TA	Timing Advance
TPC	Transmit Power Control
UCI	Uplink Control Information
UL-SCH	Uplink Shared Channel
UPF	User Plane Function
URLLC	Ultra-Reliable and Low Latency Communications
Xn-C	Xn-Control plane
Xn-U	Xn-User plane
XnAP	Xn Application Protocol

3.2 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1], in 3GPP TS 36.300 [2] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1] and 3GPP TS 36.300 [2].

Cell-Defining SSB: an SSB with an RMSI associated.

gNB: node providing NR user plane and control plane protocol terminations towards the UE, and connected via the NG interface to the 5GC.

MSG1: preamble transmission of the random access procedure.

MSG3: first scheduled transmission of the random access procedure.

ng-eNB: node providing E-UTRA user plane and control plane protocol terminations towards the UE, and connected via the NG interface to the 5GC.

NG-C: control plane interface between NG-RAN and 5GC.

NG-U: user plane interface between NG-RAN and 5GC.

NG-RAN node: either a gNB or an ng-eNB.

Numerology: corresponds to one subcarrier spacing in the frequency domain. By scaling a reference subcarrier spacing by an integer N , different numerologies can be defined.

Xn: network interface between NG-RAN nodes.

4 Overall Architecture and Functional Split

4.1 Overall Architecture

An NG-RAN node is either:

- a gNB, providing NR user plane and control plane protocol terminations towards the UE; or
- an ng-eNB, providing E-UTRA user plane and control plane protocol terminations towards the UE.

The gNBs and ng-eNBs are interconnected with each other by means of the Xn interface. The gNBs and ng-eNBs are also connected by means of the NG interfaces to the 5GC, more specifically to the AMF (Access and Mobility Management Function) by means of the NG-C interface and to the UPF (User Plane Function) by means of the NG-U interface (see 3GPP TS 23.501 [3]).

NOTE: The architecture and the F1 interface for a functional split are defined in 3GPP TS 38.401 [4].

The NG-RAN architecture is illustrated in Figure 4.1-1 below

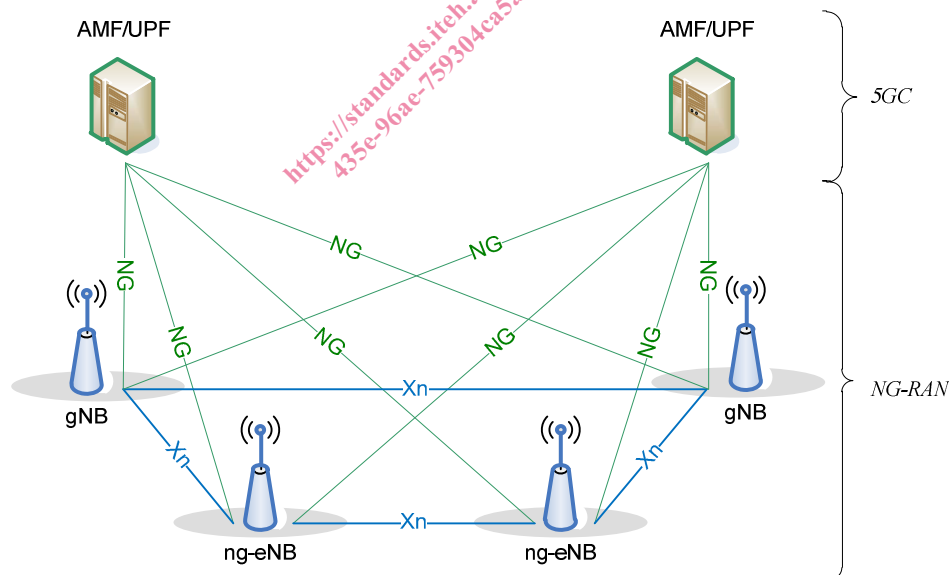


Figure 4.1-1: Overall Architecture

4.2 Functional Split

The **gNB** and **ng-eNB** host the following functions:

- Functions for Radio Resource Management: Radio Bearer Control, Radio Admission Control, Connection Mobility Control, Dynamic allocation of resources to UEs in both uplink and downlink (scheduling);

- IP header compression, encryption and integrity protection of data;
- Selection of an AMF at UE attachment when no routing to an AMF can be determined from the information provided by the UE;
- Routing of User Plane data towards UPF(s);
- Routing of Control Plane information towards AMF;
- Connection setup and release;
- Scheduling and transmission of paging messages;
- Scheduling and transmission of system broadcast information (originated from the AMF or OAM);
- Measurement and measurement reporting configuration for mobility and scheduling;
- Transport level packet marking in the uplink;
- Session Management;
- Support of Network Slicing;
- QoS Flow management and mapping to data radio bearers;
- Support of UEs in RRC_INACTIVE state;
- Distribution function for NAS messages;
- Radio access network sharing;
- Dual Connectivity;
- Tight interworking between NR and E-UTRA.

The **AMF** hosts the following main functions (see 3GPP TS 23.501 [3]):

- NAS signalling termination;
- NAS signalling security;
- AS Security control;
- Inter CN node signalling for mobility between 3GPP access networks;
- Idle mode UE Reachability (including control and execution of paging retransmission);
- Registration Area management;
- Support of intra-system and inter-system mobility;
- Access Authentication;
- Access Authorization including check of roaming rights;
- Mobility management control (subscription and policies);
- Support of Network Slicing;
- SMF selection.

The **UPF** hosts the following main functions (see 3GPP TS 23.501 [3]):

- Anchor point for Intra-/Inter-RAT mobility (when applicable);
- External PDU session point of interconnect to Data Network;
- Packet routing & forwarding;