



SLOVENSKI STANDARD SIST ETS 300 916 E3:2003

01-december-2003

Digitalni celil'ni telekomunikacijski sistem (faza 2+) ű Nabor ukazov AT za mobilno opremo (ME) sistema GSM (GSM 07.07, razli'ica 5.3.2)

Digital cellular telecommunications system (Phase 2+) (GSM); AT command set for GSM Mobile Equipment (ME) (GSM 07.07 version 5.3.2)

iTeh STANDARD PREVIEW
(standards.iteh.ai)

Ta slovenski standard je istoveten z: **ETS 300 916 Edition 3**
<https://standards.iteh.ai/catalog/standards/sist/a9117fd1-0e3c-4b4e-958b-c7e15d92b946/sist-ets-300-916-e3-2003>

ICS:

33.070.50	Globalni sistem za mobilno telekomunikacijo (GSM)	Global System for Mobile Communication (GSM)
-----------	---	--


SIST ETS 300 916 E3:2003

en

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST ETS 300 916 E3:2003

<https://standards.iteh.ai/catalog/standards/sist/a91f7fd1-0e3e-464e-958b-c7e15d92b946/sist-ets-300-916-e3-2003>

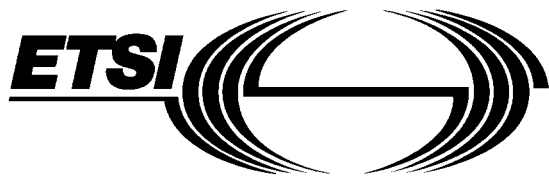

EUROPEAN
TELECOMMUNICATION
STANDARD

ETS 300 916

January 1998

Third Edition

Source: SMG

Reference: RE/SMG-040707QR2

ICS: 33.020

Key words: Digital cellular telecommunications system, Global System for Mobile communications (GSM)



**Digital cellular telecommunications system (Phase 2+);
AT command set for GSM Mobile Equipment (ME)
(GSM 07.07 version 5.3.2)**

ETSI

European Telecommunications Standards Institute

ETSI Secretariat

Postal address: F-06921 Sophia Antipolis CEDEX - FRANCE

Office address: 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE

X.400: c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 4 92 94 42 00 - Fax: +33 4 93 65 47 16

Copyright Notification: No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1998. All rights reserved.

iTeh STANDARD PREVIEW (standards.iteh.ai)

SIST ETS 300 916 E3:2003

<https://standards.iteh.ai/catalog/standards/sist/a91f7fd1-0e3e-464e-958b-c7e15d92b946/sist-ets-300-916-e3-2003>

Contents

Foreword	7
1 Scope	9
2 References	9
3 Abbreviations and definitions	11
3.1 Abbreviations	11
3.2 Definitions	12
4 AT command syntax	12
4.1 Command line	12
4.2 Information responses and result codes	13
4.3 ITU-T V.25ter [14] TE-TA interface commands	13
5 General commands	14
5.1 Request manufacturer identification +CGMI	14
5.2 Request model identification +CGMM	14
5.3 Request revision identification +CGMR	15
5.4 Request product serial number identification +CGSN	15
5.5 Select TE character set +CSCS	16
5.6 Request international mobile subscriber identity +CIMI	16
5.7 ITU-T V.25ter [14] generic TA control commands	17
5.8 PCCA STD-101 [17] select wireless network +WS46	17
5.9 Informative examples	18
6 Call control commands and methods	19
6.1 Select type of address +CSTA	19
6.2 ITU-T V.25ter [14] dial command D	19
6.3 Direct dialling from phonebooks	20
6.4 Call mode +CMOD	20
6.5 Hangup call +CHUP	21
6.6 Alternating mode call control method	21
6.7 Select bearer service type +CBST	23
6.8 Radio link protocol +CRLP	25
6.9 Service reporting control +CR	25
6.10 Extended error report +CEER	26
6.11 Cellular result codes +CRC	27
6.12 HSCSD device parameters +CHSD	27
6.13 HSCSD transparent call configuration +CHST	28
6.14 HSCSD non-transparent call configuration +CHSN	28
6.15 HSCSD current call parameters +CHSC	29
6.16 Single numbering scheme +CSNS	30
6.17 ITU-T V.25ter [14] call control commands	30
6.18 ITU-T V.25ter [14] data compression commands	31
6.19 Informative examples	31
7 Network service related commands	32
7.1 Subscriber number +CNUM	32
7.2 Network registration +CREG	33
7.3 Operator selection +COPS	34
7.4 Facility lock +CLCK	35
7.5 Change password +CPWD	36
7.6 Calling line identification presentation +CLIP	37
7.7 Calling line identification restriction +CLIR	37
7.8 Connected line identification presentation +COLP	38
7.9 Closed user group +CCUG	39

7.10	Call forwarding number and conditions +CCFC	40
7.11	Call waiting +CCWA	41
7.12	Call related supplementary services +CHLD	42
7.13	Call deflection +CTFR	42
7.14	Unstructured supplementary service data +CUSD	43
7.15	Advice of Charge +CAOC	44
7.16	Supplementary service notifications +CSSN	45
7.17	List current calls +CLCC	46
7.18	Informative examples	47
8	Mobile Equipment control and status commands	48
8.1	Phone activity status +CPAS	49
8.2	Set phone functionality +CFUN	50
8.3	Enter PIN +CPIN	51
8.4	Battery charge +CBC	52
8.5	Signal quality +CSQ	52
8.6	Mobile Equipment control mode +CMEC	53
8.7	Keypad control +CKPD	53
8.8	Display control +CDIS	55
8.9	Indicator control +CIND	55
8.10	Mobile Equipment event reporting +CMER	56
8.11	Select phonebook memory storage +CPBS	58
8.12	Read phonebook entries +CPBR	58
8.13	Find phonebook entries +CPBF	59
8.14	Write phonebook entry +CPBW	60
8.15	Clock +CCLK	61
8.16	Alarm +CALA	61
8.17	Generic SIM access +CSIM	62
8.18	Restricted SIM access +CRSM	63
8.19	Secure control command +CSCC	64
8.20	Informative examples	64
9	Mobile Equipment errors	68
9.1	Report Mobile Equipment error +CMEE	68
9.2	Mobile Equipment error result code +CME ERROR	68
9.3	Informative examples	69
Annex A (normative):	Summary of commands from other standards	70
Annex B (normative):	Summary of result codes	72
Annex C (informative):	Commands from TIA IS-101	73
C.1	Introduction	73
C.2	Commands	74
C.2.1	Select mode +FCLASS	74
C.2.2	Buffer threshold setting +VBT	74
C.2.3	Calling number ID presentation +VCID	74
C.2.4	Receive gain selection +VGR	75
C.2.5	Transmit gain selection +VGT	75
C.2.6	Initialise voice parameters +VIP	75
C.2.7	Inactivity timer +VIT	75
C.2.8	Line selection +VLS	76
C.2.9	Receive data state +VRX	77
C.2.10	Select compression method +VSM	77
C.2.11	DTMF and tone generation +VTS	78
C.2.12	Tone duration +VTD	78
C.2.13	Transmit data state +VTX	79
Annex D (informative):	Bibliography	80
Annex E (informative):	Mobile originated alternating voice/data call example	81
Annex F (informative):	Mobile terminated voice followed by data call example	82

Annex G (informative):	Voice call example.....	83
Annex H (informative):	Change History	84
History.....		85

iTeh STANDARD PREVIEW (standards.iteh.ai)

[SIST ETS 300 916 E3:2003](https://standards.iteh.ai/catalog/standards/sist/a91f7fd1-0e3e-464e-958b-c7e15d92b946/sist-ets-300-916-e3-2003)

<https://standards.iteh.ai/catalog/standards/sist/a91f7fd1-0e3e-464e-958b-c7e15d92b946/sist-ets-300-916-e3-2003>

Blank page

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 916 E3:2003](https://standards.iteh.ai/catalog/standards/sist/a91f7fd1-0e3e-464e-958b-c7e15d92b946/sist-ets-300-916-e3-2003)

<https://standards.iteh.ai/catalog/standards/sist/a91f7fd1-0e3e-464e-958b-c7e15d92b946/sist-ets-300-916-e3-2003>

Foreword

This European Telecommunication Standard (ETS) has been produced by the Special Mobile Group (SMG) of the European Telecommunications Standards Institute (ETSI).

This ETS specifies the AT command for terminal equipments being used within the digital cellular telecommunications system.

The contents of this ETS is subject to continuing work within SMG and may change following formal SMG approval. Should SMG modify the contents of this ETS, it will be resubmitted for OAP by ETSI with an identifying change of release date and an increase in version number as follows:

Version 5.x.y

where:

- y the third digit is incremented when editorial only changes have been incorporated in the specification;
- x the second digit is incremented for all other types of changes, i.e. technical enhancements, corrections, updates, etc.

Transposition dates	
Date of adoption of this ETS:	2 January 1998
Date of latest announcement of this ETS (doa):	30 April 1998
Date of latest publication of new National Standard or endorsement of this ETS (dop/e):	31 October 1998
Date of withdrawal of any conflicting National Standard (dow):	31 October 1998

[SIST ETS 300 916 E3:2003](https://standards.iteh.ai/catalog/standards/sist/a91f7fd1-0e3e-464e-958b-c7e15d92b946/sist-ets-300-916-e3-2003)

<https://standards.iteh.ai/catalog/standards/sist/a91f7fd1-0e3e-464e-958b-c7e15d92b946/sist-ets-300-916-e3-2003>

Blank page

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[SIST ETS 300 916 E3:2003](https://standards.iteh.ai/catalog/standards/sist/a91f7fd1-0e3e-464e-958b-c7e15d92b946/sist-ets-300-916-e3-2003)

<https://standards.iteh.ai/catalog/standards/sist/a91f7fd1-0e3e-464e-958b-c7e15d92b946/sist-ets-300-916-e3-2003>

1 Scope

This European Telecommunication Standard (ETS) specifies a profile of AT commands and recommends that this profile be used for controlling Mobile Equipment (ME) functions and GSM network services from a Terminal Equipment (TE) through Terminal Adaptor (TA). The command prefix +C is reserved for Digital Cellular in ITU-T Recommendation V.25ter [14]. This ETS has also the syntax details used to construct these extended GSM commands. Commands from ITU-T Recommendation V.25ter [14] and existing digital cellular standards (TIA IS-99 [15] and TIA IS-135 [16]) are used whenever applicable. Some of the new commands are defined such way that they can be easily applied to ME of networks other than GSM. ITU-T T.31 [11] and T.32 [12] fax AT commands may be used for GSM fax transmission from TE. GSM Short Message Service AT commands are defined in GSM 07.05 [24].

This ETS assumes an abstract architecture comprising a TE (e.g. a computer) and a ME interfaced by a TA (see figure 1). The span of control of the defined commands should allow to handle any physical implementation that this abstract architecture may lead to:

- TA, ME and TE as three separate entities;
- TA integrated under the ME cover, and the TE implemented as a separate entity;
- TA integrated under the TE cover, and the ME implemented as a separate entity;
- TA and ME integrated under the TE cover as a single entity.

The commands described in this ETS may be observed on the link between the TE and the TA. However, most of the commands retrieve information about the ME, not about the TA.

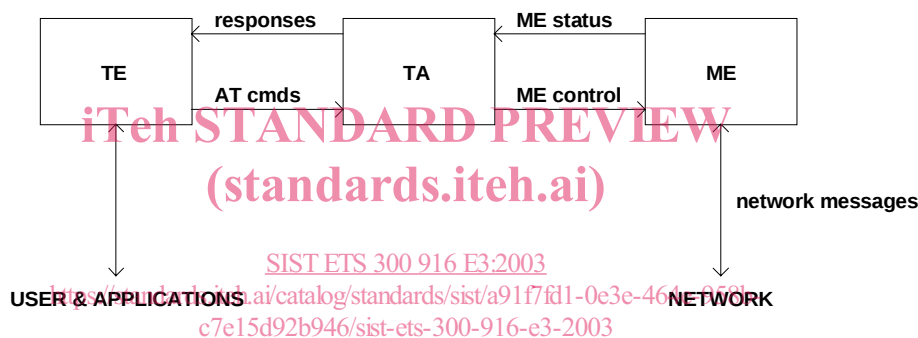


Figure 1: Setup

Interface between TE and TA is intended to operate over existing serial (ITU-T Recommendation V.24) cables, infrared link, and all link types with similar behaviour. For correct operation many of the defined commands require eight bit data and therefore it is recommended that TE-TA link is set to eight bits/ byte mode. (For infrared operation implementation refer informative references IrDA. For embedding AT commands and data during on-line data state refer TIA-617/ITU-T V.80.) Interface between TA and ME is dependent on the interface in the ME.

2 References

This ETS incorporates by dated and undated reference, provisions from other publications. These normative references are cited at the appropriate places in the text and the publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these publications apply to this ETS only when incorporated in it by amendment or revision. For undated references the latest edition of the publication referred to applies.

- [1] GSM 02.02 (ETS 300 904): "Digital cellular telecommunication system (Phase 2+); Bearer Services (BS) supported by a GSM Public Land Mobile Network (PLMN)".
- [2] GSM 02.03 (ETS 300 905): "Digital cellular telecommunication system (Phase 2+); Teleservices supported by a GSM Public Land Mobile Network (PLMN)".
- [3] GSM 02.81: "Digital cellular telecommunication system; Line identification supplementary services - Stage 1".

- [4] GSM 02.82: "Digital cellular telecommunication system; Call Forwarding (CF) supplementary services - Stage 1".
- [5] GSM 02.83: "Digital cellular telecommunication system; Call Waiting (CW) and Call Hold (HOLD) supplementary services - Stage 1".
- [6] GSM 02.88: "Digital cellular telecommunication system; Call Barring (CB) supplementary services - Stage 1".
- [7] GSM 03.03 (ETS 300 927): "Digital cellular telecommunication system (Phase 2+); Numbering, addressing and identification".
- [8] GSM 04.08 (ETS 300 940): "Digital cellular telecommunication system (Phase 2+); Mobile radio interface layer 3 specification".
- [9] GSM MoU SE.13, GSM MoU Permanent Reference Document SE.13: "GSM Mobile Network Codes and Names".
- [10] ITU-T Recommendation E.212: "Identification plan for land mobile stations".
- [11] ITU-T Recommendation T.31: "Asynchronous facsimile DCE control, service class 1".
- [12] ITU-T Recommendation T.32: "Asynchronous facsimile DCE control, service class 2".
- [13] ITU-T Recommendation T.50: "International Reference Alphabet (IRA) (Formerly International Alphabet No. 5 or IA5) - Information technology - 7-bit coded character set for information exchange".
- [14] ITU-T Draft new Recommendation V.25ter: "Serial asynchronous automatic dialling and control".
- [15] Telecommunications Industry Association TIA IS-99: "Data Services Option Standard for Wideband Spread Spectrum Digital Cellular System".
- [16] Telecommunications Industry Association TIA IS-135: "800 MHz Cellular Systems, TDMA Services, Async Data and Fax".
- [17] Portable Computer and Communications Association PCCA STD-101 Data Transmission Systems and Equipment: "Serial Asynchronous Automatic Dialling and Control for Character Mode DCE on Wireless Data Services".
- [18] GSM 04.22 (ETS 300 946): "Digital cellular telecommunication system (Phase 2+); Radio Link Protocol (RLP) for data and telematic services on the Mobile Station - Base Station System (MS - BSS) interface and the Base Station System - Mobile-services Switching Centre (BSS - MSC) interface".
- [19] GSM 02.30 (ETS 300 907): "Digital cellular telecommunication system (Phase 2+); Man Machine Interface (MMI) of the Mobile Station (MS)".
- [20] GSM 05.08 (ETS 300 578): "Digital cellular telecommunication system (Phase 2); Radiosubsystem link control".
- [21] GSM 02.85: "Digital cellular telecommunication system; Closed User Group (CUG) supplementary services - Stage 1".
- [22] GSM 02.84: "Digital cellular telecommunication system; MultiParty (MPPTY) supplementary services - Stage 1".
- [23] GSM 02.90: "Digital cellular telecommunication system; Stage 1 description of Unstructured Supplementary Service Data (USSD)".

- [24] GSM 07.05: "Digital cellular telecommunication system (Phase 2+); Use of Data Terminal Equipment - Data Circuit terminating Equipment (DTE - DCE) interface for Short Message Service (SMS) and Cell Broadcast Service (CBS)".
- [25] GSM 03.38 (ETS 300 900): "Digital cellular telecommunication system (Phase 2+); Alphabet and language specific information".
- [26] GSM 02.24 (ETS 300 923): "Digital cellular telecommunication system; Description of Charge Advice Information (CAI)".
- [27] GSM 02.86: "Digital cellular telecommunication system; Advice of Charge (AoC) supplementary services - Stage 1".
- [28] GSM 11.11 (ETS 300 977): "Digital cellular telecommunication system (Phase 2+); Specification of the Subscriber Identity Module - Mobile Equipment (SIM-ME) interface".
- [29] GSM 02.34: "Digital cellular telecommunication system (Phase 2+); High Speed Circuit Switched Data (HSCSD) - Stage 1".
- [30] GSM 02.91: "Digital cellular telecommunication system (Phase 2+); Explicit Call Transfer (ECT) supplementary service - Stage 1".
- [31] GSM 02.72: "Digital cellular telecommunication system (Phase 2+); Call Deflection (CD) supplementary service - Stage 1".
- [32] ISO/IEC10646: "Universal Multiple-Octet Coded Character Set (UCS)"; UCS2, 16 bit coding.
- [33] GSM 02.22: "Digital cellular telecommunication system (Phase 2+); Personalisation of GSM Mobile Equipment (ME) Mobile functionality specification".

item STANDARD PREVIEW

(standards.itec.it)

<https://standards.itec.it/standards/sist/a91f7fd1-0e3e-464e-958b-c7e15d92b946/sist-ets-300-916-e3-2003>

3 Abbreviations and definitions

3.1 Abbreviations

For the purposes of this ETS, the following abbreviations apply:

AT	ATtention; this two-character abbreviation is always used to start a command line to be sent from TE to TA
BCD	Binary Coded Decimal
ETSI	European Telecommunications Standards Institute
HSCSD	High Speed Circuit Switched Data
IMEI	International Mobile Station Equipment Identity
IRA	International Reference Alphabet (ITU-T T.50 [13])
IrDA	Infrared Data Association
ISO	International Standards Organisation
ITU-T	International Telecommunication Union - Telecommunications Standardization Sector
ME	Mobile Equipment, e.g. a GSM phone (equal to MS; Mobile Station)
MoU	Memorandum of Understanding (GSM operator joint)
PCCA	Portable Computer and Communications Association
RDI	Restricted Digital Information
RLP	Radio Link Protocol
SIM	Subscriber Identity Module
TA	Terminal Adaptor, e.g. a GSM data card (equal to DCE; Data Circuit terminating Equipment)
TE	Terminal Equipment, e.g. a computer (equal to DTE; Data Terminal Equipment)
TIA	Telecommunications Industry Association
UDI	Unrestricted Digital Information

3.2 Definitions

For the purposes of this ETS, the following syntactical definitions apply (refer also clause 4):

<CR>	Carriage return character, which value is specified with command S3.
<LF>	Linefeed character, which value is specified with command S4.
<...>	Name enclosed in angle brackets is a syntactical element. Brackets themselves do not appear in the command line.
[...]	Optional subparameter of a command or an optional part of TA information response is enclosed in square brackets. Brackets themselves do not appear in the command line. When subparameter is not given in <i>parameter type</i> commands, new value equals to its previous value. In <i>action type</i> commands, action should be done on the basis of the recommended default setting of the subparameter.
<u>underline</u>	Underlined defined subparameter value is the recommended default setting of this subparameter. In <i>parameter type</i> commands, this value should be used in factory settings which are configured by V.25ter [14] command &F0. In <i>action type</i> commands, this value should be used when subparameter is not given.

4 AT command syntax

This clause summarizes general aspects on AT commands and issues related to them. For further information refer ITU-T Recommendation V.25ter [14].

4.1 Command line

See figure 2 for general structure of a command line. Standardized *basic* commands are found only in V.25ter [14]. GSM commands use syntax rules of *extended* commands. Every extended command has a *test command* (trailing =?) to test the existence of the command and to give information about the type of its subparameters. *Parameter type* commands also have a *read command* (trailing ?) to check the current values of subparameters. *Action type* commands do not store the values of any of their possible subparameters, and therefore do not have a read command.

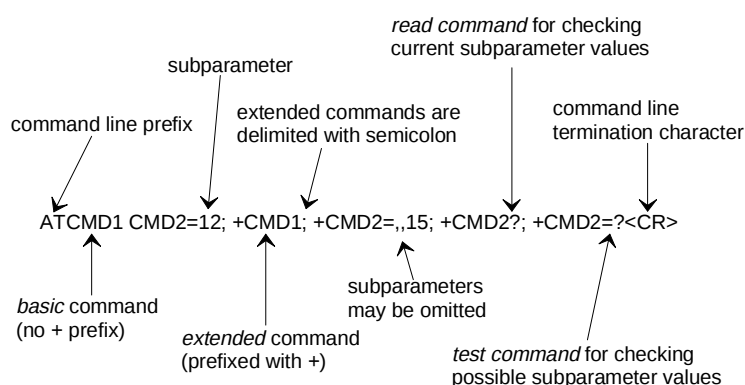


Figure 2: Basic structure of a command line

If verbose responses are enabled with command V1 and all commands in a command line has been performed successfully, result code <CR><LF>OK<CR><LF> is sent from the TA to the TE. If numeric responses are enabled with command V0, result code 0<CR> is sent instead.

If verbose responses are enabled with command V1 and subparameter values of a command are not accepted by the TA (or command itself is invalid, or command cannot be performed for some reason), result code <CR><LF>ERROR<CR><LF> is sent to the TE and no subsequent commands in the command line are processed. If numeric responses are enabled with command V0, result code 4<CR> is sent

instead. ERROR (or 4) response may be replaced by +CME ERROR: <err> (refer clause 9) when command was not processed due to an error related to ME operation.

4.2 Information responses and result codes

The TA response for the example command line of figure 2 could be as shown in figure 3. Here, verbose response format is enabled with command V1. If numeric format V0 would have been used, <CR><LF> headers of *information responses* would have been left out and *final result code* changed to 0<CR>.

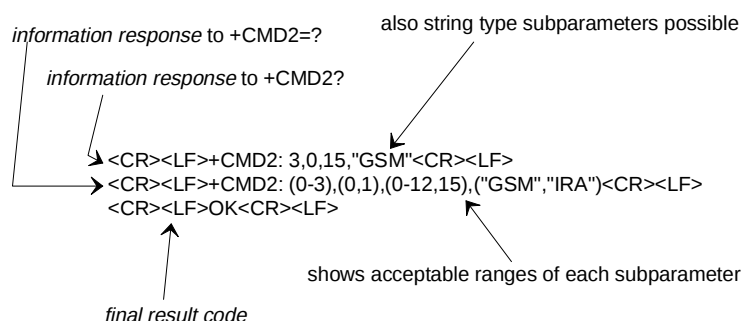


Figure 3: Response to a command line

So called *intermediate result codes* inform about progress of TA operation (e.g. connection establishment CONNECT), and so called *unsolicited result codes* indicate occurrence of an event not directly associated with issuance of a command from TE (e.g. ring indication RING).

4.3 ITU-T V.25ter [14] TE-TA interface commands

Table 1 summarizes V.25ter [14] commands relating to command line and response formatting, and TA-TE interface operation. All are applicable to GSM terminals.

Table 1: V.25ter commands relating to TE-TA interface

Command	Section	Impl.	Use in GSM
S3=[<value>]	6.2.1	mand.	command line termination character (mandatory default setting IRA 13)
S4=[<value>]	6.2.2	mand.	response formatting character (recommended default IRA 10)
S5=[<value>]	6.2.3	mand.	command line editing character (recommended default IRA 8)
E[<value>]	6.2.4	mand.	command echo (recommended default 1 i.e. TA echoes commands back)
Q[<value>]	6.2.5	mand.	result code suppression (recommended default 0 i.e. TA transmits result codes)
V[<value>]	6.2.6	mand.	TA response format (recommended default 1 i.e. verbose format)
X[<value>]	6.2.7	mand.	defines CONNECT result code format; values manufacturer specific
&C[<value>]	6.2.8	mand.	determines how ITU-T V.24 circuit 109 (or equivalent) relates to the detection of received line signal from remote end (recommended default 1 i.e. 109 operation relates to detection of received signal)
&D[<value>]	6.2.9	mand.	determines how TA responds when ITU-T V.24 circuit 108/2 (or equivalent) is changed from ON to OFF condition during online data state
+IPR=[<value>]	6.2.10	opt.	fixed TE data rate (recommended default 0 i.e. automatic detection)
+ICF=[<format>[,<parity>]]	6.2.11	opt.	TE-TA character framing (recommended default 3,3 i.e. eight data bits, no parity, 1 stop bit)
+IFC=[<by_te>[,<by_ta>]]	6.2.12	opt.	TE-TA local flow control (recommended default 2,2 i.e. TE uses ITU-T V.24 circuit 133 (or equivalent), and TA circuit 106 (or equivalent))
+ILRR=[<value>]	6.2.13	opt.	determines whether the used local TE-TA data rate is informed using intermediate result code +ILRR: <rate> before going online data state after call answering or originating