
**Methods for the calibration of
vibration and shock transducers —
Part 33:
Testing of magnetic field sensitivity**

*Méthodes pour l'étalonnage des transducteurs de vibrations et de
chocs —*

iTeh STANDARD PREVIEW
Partie 33: Essai de sensibilité aux vibrations transversale
(standards.iteh.ai)

[ISO 16063-33:2017](https://standards.iteh.ai/catalog/standards/sist/0e255253-c571-458d-9eb2-790df626d539/iso-16063-33-2017)

<https://standards.iteh.ai/catalog/standards/sist/0e255253-c571-458d-9eb2-790df626d539/iso-16063-33-2017>



iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 16063-33:2017](https://standards.iteh.ai/catalog/standards/sist/0e255253-c571-458d-9eb2-790df626d539/iso-16063-33-2017)

<https://standards.iteh.ai/catalog/standards/sist/0e255253-c571-458d-9eb2-790df626d539/iso-16063-33-2017>



COPYRIGHT PROTECTED DOCUMENT

© ISO 2017, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

	Page
Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Uncertainty of measurement	1
5 Requirements for apparatus	2
5.1 General	2
5.2 Magnetic field sensitivity tester	2
5.3 Conditioning amplifier	3
5.4 Voltmeter	4
5.5 Teslameter	4
6 Ambient conditions	4
7 Method	4
7.1 Apparatus setup	4
7.2 Adjusting test magnetic field	5
7.3 Mounting transducer	5
7.4 Test procedure	5
7.5 Expression of results	6
Annex A (informative) Automatic test system of magnetic field sensitivity	7
Annex B (informative) Alternative procedure with three orthogonal coils	9

[ISO 16063-33:2017](https://standards.iteh.ai/catalog/standards/sist/0e255253-c571-458d-9eb2-790df626d539/iso-16063-33-2017)

<https://standards.iteh.ai/catalog/standards/sist/0e255253-c571-458d-9eb2-790df626d539/iso-16063-33-2017>

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see the following URL: www.iso.org/iso/foreword.html. (standards.iteh.ai)

This document was prepared by Technical Committee ISO/TC 108, *Mechanical vibration, shock and condition monitoring*, Subcommittee SC 3, *Use and calibration of vibration and shock measuring instruments*.
ISO 16063-33:2017
https://standards.iteh.ai/catalog/standards/sist/0e255253-c571-458d-9eb2-790df626d539/iso-16063-33-2017

This second edition cancels and replaces the first edition (ISO 5347-19:1993), which has been technically revised.

A list of all the parts in the ISO 16063 series can be found on the ISO website.

Methods for the calibration of vibration and shock transducers —

Part 33: Testing of magnetic field sensitivity

1 Scope

This document specifies a method, procedures and the specifications for an apparatus to be used for testing the magnetic field sensitivity of vibration and shock transducers. It is applicable to all kinds of vibration and shock transducers.

This document is applicable for a reference test sinusoidal magnetic field having a root mean square (r.m.s.) value more than 10^{-3} T at 50 Hz or 60 Hz. Typically, a test magnetic field of 10^{-2} T at 50 Hz or 60 Hz is used.

This document is primarily intended for those who are required to meet internationally standardized methods for the measurement of magnetic field sensitivity under laboratory conditions.

NOTE 1 T (tesla) = 1 Wb/m².

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 16063-1:1998, *Methods for the calibration of vibration and shock transducers — Part 1: Basic concepts*

3 Terms and definitions

No terms and definitions are listed in this document.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

4 Uncertainty of measurement

Uncertainty of measurements can be expressed as relative expanded uncertainty. If the test signal is big and the signal-to-noise ratio (SNR) is more than 20 dB, ignoring the influence of the ambient vibration and apparatus background noise, a relative expanded uncertainty of 10 % (coverage factor $k = 2$) or less can be achieved according to this document. However, when the test signal is small and the SNR is not more than 20 dB, the uncertainty components caused by ambient vibration and apparatus background noise cannot be ignored. Conversely, it shall be taken into account carefully because it has now become as a main part of the uncertainty.

All users of this document shall assess and report the uncertainty of measurement according to ISO 16063-1:1998, Annex A. The uncertainty of measurement is expressed as expanded uncertainty for

a coverage factor of 2 or a confidence level of 95 %. It is the responsibility of the laboratory or end user to make sure that the reported values of uncertainty are credible.

5 Requirements for apparatus

5.1 General


This clause gives specifications for the apparatus necessary to comply with this document and notably to obtain the uncertainties of [Clause 4](#).

5.2 Magnetic field sensitivity tester

The magnetic field sensitivity of the transducer is expressed as the maximum output of the transducer in a test magnetic field divided by the magnetic flux density of this test magnetic field, see [Formula \(2\)](#). In order to get the magnetic field sensitivity, S_B , observe and do the following.

- Ensure that the test magnetic field passes through the transducer in all directions.
- Test and obtain all the output data of the transducer from each direction.
- Compare all of these output data and find out the maximum one, that is $X_{B,max}$.
- Calculate the magnetic field sensitivity, S_B , according to [Formula \(2\)](#).

An apparatus named “magnetic field sensitivity tester” is specially manufactured for magnetic field sensitivity testing. The structural schematic diagram of the tester is shown in [Figure 1](#).

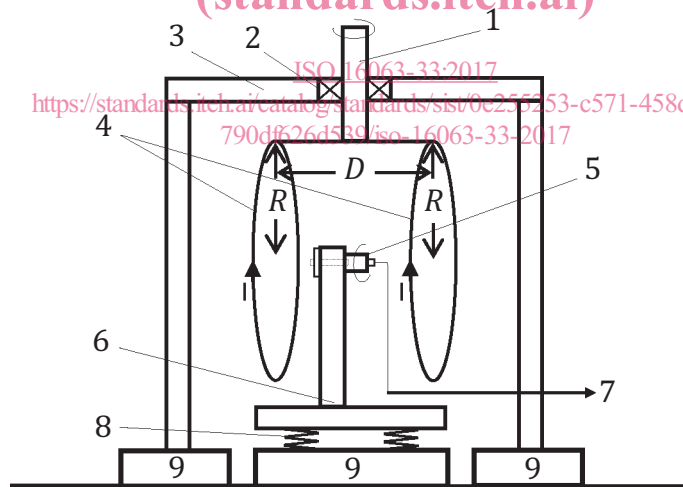

Key

- | | |
|---------------------------|---|
| 1 rotation axis | 7 transducer output |
| 2 bearing | 8 vibration isolation system |
| 3 support | 9 base |
| 4 two coils | D distances between the planes of two coils |
| 5 transducer to be tested | R radius of coils |
| 6 test platform | |

Figure 1 — Structural schematic diagram of a magnetic field sensitivity tester

The magnetic field sensitivity tester shall meet the following specifications.

- a) A pair of coils (two coils) is symmetrically mounted above the test platform. It can be rotated horizontally around its vertical rotation axis. The distances between the planes of the two coils shall be equal to their radius (that is, $D = R$, see [Figure 1](#)).
- b) The test platform used for mounting the transducer to be tested shall be made of non-ferromagnetic material. The transducer can be horizontally mounted on the test platform and shall be at the centre of the two coils. Furthermore, it shall at least be able to be rotated 180° freely around its own geometric axis sensitivity, and the mass of the test platform shall be more than 50 times that of the transducer to be tested.

NOTE 1 The centre of the two coils means the centre of gravity of the two coils.

- c) The vibration isolation system is used to reduce the ambient vibration. The eigenfrequency of the vibration isolation system should be less than 30 Hz.
- d) Produce an adjustable alternating current (AC) of 50 Hz or 60 Hz that flows through the two coils in the same direction and generates a needed test magnetic field.
- e) In the area the transducer occupied, the magnetic field shall be within the needed test magnetic flux density with a relative tolerance of $\pm 3\%$.

NOTE 2 Due to the magnetic field generated by two coils being superimposed and compensated for each other, the magnetic field is uniform near the centre of two coils where the transducer is mounted.

The flux density of the magnetic field in the centre of two coils can be calculated by [Formula \(1\)](#):

$$B = \mu_0 \times I \times N \times \frac{R^2}{(R^2 + 0,25D^2)^{1,5}} \quad (1)$$

where

<https://standards.iteh.ai/catalog/standards/sist/0e255253-c571-458d-9eb2-790df626d539/iso-16063-33-2017>

B is the r.m.s. value of the magnetic flux density of the magnetic field in the centre of the two coils, in tesla;

μ_0 is equal to $4\pi \cdot 10^{-7} \text{ T} \cdot \text{m/A} = 1,257 \cdot 10^{-6} \text{ T} \cdot \text{m/A}$;

I is the r.m.s. value of the current, in amperes;

N is the number of turns;

R is the radius of each coil, in metres;

D is the distance between the two planes of the two coils, in metres.

EXAMPLE 1 Two coils: $D = R = 150 \text{ mm}$, $N = 333$. When $I = 5,0 \text{ A}$, at the centre of two coils, $B = 10^{-2} \text{ T}$.

EXAMPLE 2 Two coils: $D = R = 250 \text{ mm}$, $N = 333$. When $I = 8,35 \text{ A}$, at the centre of two coils, $B = 10^{-2} \text{ T}$.

5.3 Conditioning amplifier

The conditioning amplifier shall have a low background noise, with low-pass and high-pass filters used to cut unwanted signals during the test.

Maximum expanded uncertainty ($k = 2$): 1 % of gain.

During the measurement operation, a ground loop among the transducer, test platform (see [Figure 2](#)), the amplifier and the read out device should be prevented.

5.4 Voltmeter

A true r.m.s. voltmeter shall be used.

Maximum expanded uncertainty ($k=2$): 1 % of reading.

NOTE Other instruments with the same or smaller uncertainty, such as a signal analyzer, etc., can also be used in place of a voltmeter.

5.5 Teslameter

A r.m.s. teslameter shall be used.

Maximum expanded uncertainty ($k=2$): 2 % of reading.

6 Ambient conditions

Testing shall be carried out under the following conditions:

- a) room temperature, (23 ± 5) °C;
- b) relative humidity, 75 % max.;
- c) signal-to-noise ratio, $SNR \geq 20$ dB. If the $SNR < 20$ dB (for example, some transducers have a very weak output in magnetic field and $SNR < 20$ dB), the uncertainty components caused by ambient vibration and apparatus background noise cannot be ignored and shall be taken into account.


iTech STANDARD PREVIEW
(standards.iteh.ai)

7 Method

[ISO 16063-33:2017](https://standards.iteh.ai/catalog/standards/sist/0e255253-c571-458d-9eb2-790df626d539/iso-16063-33-2017)

7.1 Apparatus setup <https://standards.iteh.ai/catalog/standards/sist/0e255253-c571-458d-9eb2-790df626d539/iso-16063-33-2017>

The magnetic field sensitivity tester, conditioning amplifier and voltmeter are connected as shown in [Figure 2](#). Appropriate measurement ranges and band-pass filter settings shall be carefully chosen for improving the SNR.

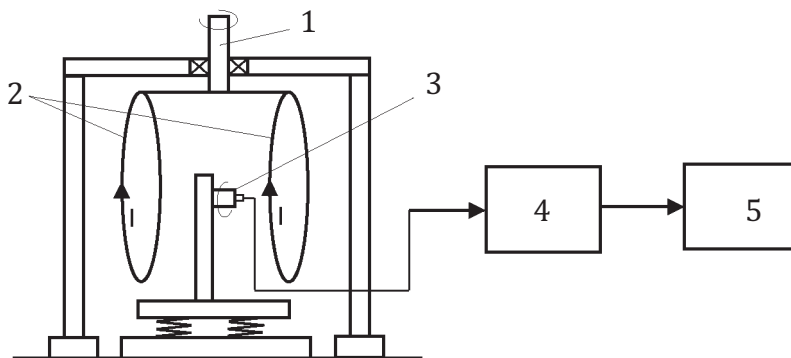

Key

- 1 rotation axis
- 2 two coils
- 3 transducer to be tested
- 4 conditioning amplifier
- 5 voltmeter

Figure 2 — Schematic of apparatus connection

- a) Use low-noise conditioning amplifier and input cables.
- b) Select appropriate ranges for the conditioning amplifier and voltmeter.
- c) Check and try to improve the signal-to-noise ratio SNR by turning on/off the magnetic field by repeating step a) and step b).
- d) Avoid any vibration and noise around the tester during testing.

7.2 Adjusting test magnetic field

Obtain a needed magnetic flux density by adjusting the current and measuring the magnetic flux density using a teslameter.

The teslameter probe is very sensitive to the direction of the test magnetic field. Read the instruction manual carefully for correct use.

7.3 Mounting transducer

Mount the transducer to be tested horizontally in the test platform using a non-magnetic mounting stud. The output of the transducer shall be connected to the voltmeter via a conditioning amplifier. Any ferro-magnetic material should not be allowed to get close to the volume between the two coils. Ferro-magnetic material outside the coil also influences the magnetic field inside the coils.

First, adjust the test magnetic field and then mount the transducer. In some cases, the magnetic field may have a slight change after the transducer is mounted. That is because these transducers are partly made of the ferro-magnetic material.

7.4 Test procedure

- a) Slowly rotate the two coils 360° while carefully observing the voltmeter. Locate the transducer maximum output in this test plane and record it.
- b) Change test plane. Rotate the transducer around its own geometric sensitivity axis in small angle increments (e.g. 15°).
- c) Repeat step a) and step b), until the transducer is rotated 180° around its own geometric sensitivity axis. A series of maximum output values are thus obtained and recorded.
- d) Compare all of these maximum output values and select the biggest one as the transducer maximum output, $X_{B,max}$.

The above test procedures can also be achieved automatically with the assistance of a computer (see [Annex A](#)). [Annex B](#) provides an alternative procedure using three orthogonal coils.

It is important to eliminate ambient vibration and apparatus background noise in the test procedures.

NOTE 1 The test plane is the plane formed by the vector of magnetic field (through the centre line of coils) while the coil is rotating during test.

During measurement, the current can change due to thermal heating. In this case, the current shall be observed and controlled to the nominal value over time.

NOTE 2 Prevent the danger of overheating the magnetic coils by long-term operation.

7.5 Expression of results

The magnetic field sensitivity of the transducer, S_B , can be calculated using [Formula \(2\)](#):

$$S_B = \frac{X_{B,\max}}{B} \quad (2)$$

where

$X_{B,\max}$ is the transducer maximum output in the magnetic field as the equivalent based on its sensitivity. For the acceleration transducer r.m.s. values, the unit is m/s^2 , for velocity transducer r.m.s. values, the unit is mm/s and for displacement transducer r.m.s. values, the unit is mm .

B is the magnetic flux density r.m.s. value of the test magnetic field, in T.

The output of the transducer in the magnetic field may have some harmonic components and the fundamental frequency (testing frequency).

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ISO 16063-33:2017](#)


<https://standards.iteh.ai/catalog/standards/sist/0e255253-c571-458d-9eb2-790df626d539/iso-16063-33-2017>

Annex A (informative)

Automatic test system of magnetic field sensitivity

A.1 Apparatus and automatic test system

The magnetic field sensitivity tester and other apparatus are connected to a computer via a bus. The specifications for all the apparatus to be used are as same as those given in [Clause 5](#). An automatic testing system for the magnetic field sensitivity is shown in [Figure A.1](#).

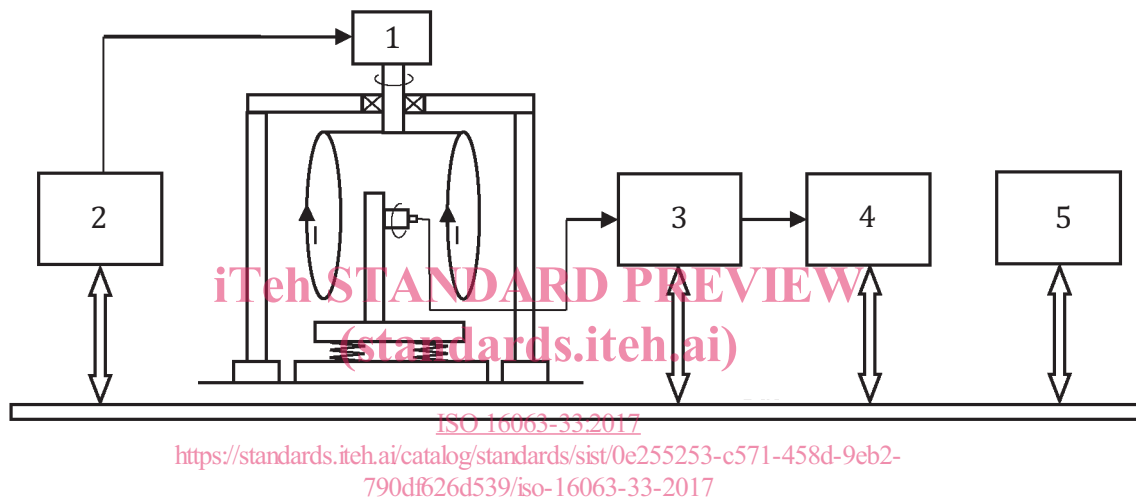

Key

- 1 stepper motor
- 2 stepper motor driver/controller
- 3 conditioning amplifier
- 4 voltmeter
- 5 computer

Figure A.1 — Schematic of the automatic test system of magnetic field sensitivity

A.2 Adjusting test magnetic field and mounting transducer

Adjust the magnetic field to a needed value, as given in [7.2](#).

Mount the tested transducer on the test platform, as given in [7.3](#).

A.3 Test procedures and expression of results

A.3.1 A computer controls the stepper motor to rotate the two coils by a small angle (such as 1°). Meanwhile, the voltmeter obtains data synchronously. While the two coils are rotated by 360° , the test in this plane is completed and an output curve of the transducer in the magnetic field can be obtained as shown in [Figure A.2](#).

Type: BJ No. 0043, $J = 45^\circ$

$K = 3^\circ$, $V_{B,\max} = 0,887 \text{ m} \cdot \text{s}^{-2}$, $B = 0,01\text{T}$