

# ETSI TS 129 217 V14.3.0 (2019-10)



**Universal Mobile Telecommunications System (UMTS);  
LTE;  
Policy and Charging Control (PCC);  
Congestion reporting over Np reference point  
(3GPP TS 29.217 version 14.3.0 Release 14)**

STANDARD PREVIEW  
https://standards.iteh.ai/en/standards/etsi/etsi-ts-129-217-v14-3-0-2019-10/4373-b38e-a344530f6576



---

**Reference**RTS/TSGC-0329217ve30

---

**Keywords**LTE,UMTS

---

**ETSI**

650 Route des Lucioles  
F-06921 Sophia Antipolis Cedex - FRANCE

---

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C  
Association à but non lucratif enregistrée à la  
Sous-Préfecture de Grasse (06) N° 7803/88

---

**Important notice**

---

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at [www.etsi.org/deliver](http://www.etsi.org/deliver).

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommiteeSupportStaff.aspx>

---

**Copyright Notification**

---

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2019.

All rights reserved.

**DECT™**, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.

**3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

**oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners.

**GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

---

# Intellectual Property Rights

## Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

## Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

---

# Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under <http://webapp.etsi.org/key/queryform.asp>.

---

# Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

# Contents

Intellectual Property Rights .....	2
Legal Notice .....	2
Modal verbs terminology.....	2
Foreword.....	5
1 Scope .....	6
2 References .....	6
3 Definitions and abbreviations.....	7
3.1 Definitions .....	7
3.2 Abbreviations .....	7
4 Np reference point .....	7
4.1 Overview .....	7
4.2 Np reference model .....	8
4.3 Functional elements.....	8
4.3.1 RCAF.....	8
4.3.2 PCRF .....	9
4.3.3 H-PCRF .....	9
4.3.4 V-PCRF .....	9
4.4 Procedures over Np reference point .....	9
4.4.1 RUCI Report.....	9
4.4.1.1 General .....	9
4.4.1.2 Non-aggregated RUCI report .....	10
4.4.1.3 Aggregated RUCI report .....	10
4.4.2 Reporting Restriction Provisioning.....	10
4.4.3 UE mobility between RCAFs .....	11
4.4.4 Removal of UE context .....	11
4.4.5 Race condition handling .....	12
5 Np protocol.....	12
5.1 Protocol support .....	12
5.2 Initialization, maintenance and termination of connection and session.....	12
5.3 Np specific AVPs .....	13
5.3.1 General.....	13
5.3.2 Aggregated-Congestion-Info AVP .....	13
5.3.3 Aggregated-RUCI-Report AVP.....	13
5.3.4 Congestion-Level-Definition AVP .....	14
5.3.5 Congestion-Level-Range AVP .....	14
5.3.6 Congestion-Level-Set-Id AVP.....	14
5.3.7 Congestion-Level-Value AVP .....	14
5.3.8 Congestion-Location-Id AVP .....	15
5.3.9 Conditional-Restriction AVP.....	15
5.3.10 eNodeB-Id AVP.....	15
5.3.11 IMSI-List AVP .....	15
5.3.12 RCAF-Id AVP .....	16
5.3.13 Reporting-Restriction AVP.....	16
5.3.14 RUCI-Action AVP.....	16
5.3.15 Extended-eNodeB-Id AVP .....	17
5.4 Np re-used AVPs.....	17
5.4.1 General.....	17
5.4.2 Use of the Supported-Features AVP on the Np reference point .....	18
5.5 Np specific Experimental-Result-Code AVP values .....	19
5.5.1 General.....	19
5.5.2 Success.....	19
5.5.3 Permanent Failures .....	19
5.5.4 Transient Failures .....	19

5.6 Np messages ..... 19

5.6.0 Command-Code Values ..... 19

5.6.1 Non-Aggregated-RUCI-Report-Request (NRR) command ..... 20

5.6.2 Non-Aggregated-RUCI-Report-Answer (NRA) command ..... 20

5.6.3 Aggregated-RUCI-Report-Request (ARR) command ..... 21

5.6.4 Aggregated-RUCI-Report-Answer (ARA) command ..... 21

5.6.5 Modify-Uecontext-Request (MUR) command ..... 21

5.6.6 Modify-Uecontext-Answer (MUA) command ..... 22

**Annex A (informative): Change history ..... 23**

History ..... 24

**ITeH STANDARD PREVIEW**  
 (standards.iteh.ai)  
 Full standard:  
<https://standards.iteh.ai/catalog/standards/sist/a87317cf-6ff2-4373-b38e-a344530f657d/etsi-ts-129-217-v14.3.0-2019-10>

---

# Foreword

This Technical Specification has been produced by the 3<sup>rd</sup> Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- Y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

**PREVIEW**  
**STANDARD**  
**ETSI**  
**(standards.iteh.ai)**  
Full standard:  
<https://standards.iteh.ai/catalog/standards/sist/a87317cf-6f12-4373-b38e-a344530f657d/etsi-ts-129-217-v14.3.0-2019-10>

---

# 1 Scope

The present document provides the stage 3 specification of the Np reference point. The functional requirements and the stage 2 specifications of the Np reference point are contained in 3GPP TS 23.203 [2]. The Np reference point lies between the RAN Congestion Awareness Function (RCAF) and the Policy and Charging Rules Function (PCRF) for the non-roaming case, between the RCAF and the H-PCRF for the home-routed scenario and between the RCAF and the V-PCRF for the visited access scenario.

NOTE: If not specified explicitly, the PCRF also means H-PCRF for the home-routed scenario or V-PCRF in the visited access scenario in the specification.

---

# 2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

- [1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".
- [2] 3GPP TS 23.203: "Policy and charging control architecture".
- [3] 3GPP TS 29.213: "Policy and Charging Control signalling flows and QoS parameter mapping".
- [4] IETF RFC 4005: "Diameter Network Access Server Application".
- [5] IETF RFC 4006: "Diameter Credit Control Application".
- [6] 3GPP TS 29.229: "Cx and Dx interfaces based on Diameter protocol; Protocol details".
- [7] IETF RFC 3588: "Diameter Base Protocol".
- [8] 3GPP TS 23.401: "GPRS enhancements for E-UTRAN access".
- [9] 3GPP TS 23.060: "General Packet Radio Service (GPRS); Service description; Stage 2".
- [10] 3GPP TS 29.215: "Policy and Charging Control (PCC) over S9 reference point; Stage 3".
- [11] 3GPP TS 29.061: "Interworking between the Public Land Mobile Network (PLMN) supporting packet based services and Packet Data Networks (PDN)".
- [12] 3GPP TS 29.274: "3GPP Evolved Packet System. Evolved GPRS Tunnelling Protocol for EPS (GTPv2)".
- [13] ITU-T Recommendation E.212: "The international identification plan for mobile terminals and mobile users".
- [14] 3GPP TS 29.212: "Policy and Charging Control (PCC); Reference points".
- [15] IETF RFC 7683: "Diameter Overload Indication Conveyance".
- [16] IETF RFC 7944: "Diameter Routing Message Priority".
- [17] IETF RFC8583: "Diameter Load Information Conveyance".
- [18] IETF RFC 6733: "Diameter Base Protocol".

- [19] IETF RFC 5719: "Updated IANA Considerations for Diameter Command Code Allocations".
- [20] IETF RFC 2234: "Augmented BNF for syntax specifications".

---

## 3 Definitions and abbreviations

### 3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

**Home Routed Access:** Roaming scenario where the PCEF is located in the HPLMN. In a Home Routed roaming scenario, the UE obtains access to the packet data network from the HPLMN.

**RAN user plane congestion:** RAN user plane congestion occurs when the demand for RAN resources exceeds the available RAN capacity to deliver the user data for a prolonged period of time.

NOTE: Short-duration traffic bursts is a normal condition at any traffic load level, and is not considered to be RAN user plane congestion. Likewise, a high-level of utilization of RAN resources (based on operator configuration) is considered a normal mode of operation and might not be RAN user plane congestion.

**Visited Access (also known as local breakout):** Roaming scenario where the PCEF is located in the VPLMN. In a Visited Access Roaming scenario, the UE obtains access to the packet data network from the VPLMN.

### 3.2 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

AF	Application Function
ARR	Aggregated RUCI Report Request
ARA	Aggregated RUCI Report Answer
DRMP	Diameter Routing Message Priority
H-PCRF	Home PCRF
MUR	Modify Uecontext Request
MUA	Modify Uecontext Answer
NRR	Non-Aggregated RUCI Report Request
NRA	Non-Aggregated RUCI Report Answer
PCC	Policy and Charging Control
PCRF	Policy and Charging Rule Function
RCAF	RAN Congestion Awareness Function
RUCI	RAN User Plane Congestion Information
V-PCRF	Visited PCRF

---

## 4 Np reference point

### 4.1 Overview

The Np reference point is located between the RCAF and the PCRF for the non-roaming scenario, between the RCAF and the H-PCRF for the home-routed scenario and between the RCAF and the V-PCRF for the visited access scenario. The Np reference point is used for:

- Reporting the RUCI from the RCAF to the PCRF;
- Provisioning the Reporting Restriction from the PCRF to the RCAF;



- The User Equipment (UE) mobility between RCAFs;
- The removal of the UE context in the RCAF.

The stage 2 level requirements for the Np reference point are defined in 3GPP TS 23.203 [2].

Signalling flows related to Np interface are specified in 3GPP TS 29.213 [3].


Refer to Annex G of 3GPP TS 29.213 [3] for Diameter overload control procedures over the Np interface.

Refer to Annex J of 3GPP TS 29.213 [3] for Diameter message priority mechanism procedures over the Np interface.

Refer to Annex **K** of 3GPP TS 29.213 [3] for Diameter load control procedures over the Np interface.

## 4.2 Np reference model

The relationships between the involved functional entities are depicted in figure 4.2.1. The overall PCC architecture is depicted in clause 3a of 3GPP TS 29.213 [3].

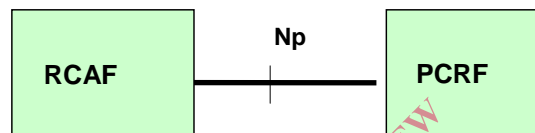

**Figure 4.2.1: Np reference model**

NOTE: For the home-routed access scenario, the RCAF interacts with the H-PCRf. For the visited access scenario, the RCAF interacts with the V-PCRf.

**Figure 4.2.2: Void**

**Figure 4.2.3: Void**

## 4.3 Functional elements

### 4.3.1 RCAF

The RCAF is a functional element which reports RAN User Plane Congestion Information (RUCI) via the Np interface to the PCRf to enable the PCRf to take the RAN user plane congestion status into account for policy decisions. RUCI includes the following information:

- The user id (e.g. IMSI) identifying the UE impacted by congestion;
- PDN ID for which congestion information is reported;
- Congestion level information (either congestion level value or congestion level set id) of the UE impacted by congestion;
- eNodeB identifier, ECGI or SAI identifying the eNodeB, E-UTRAN cell or Service Area respectively, serving the UE if a conditional restriction to restrict location reporting is not enabled.

NOTE 1: In case of E-UTRAN, whether the eNodeB identifier or the ECGI are included in the RUCI is up to operator configuration in the RCAF.

The RCAF sends the RUCI to the PCRfs serving the UEs' PDN connections as follows:

- For a PDN connection in a non-roaming scenario the RCAF reports the RUCI to the PCRf;
- For a PDN connection in a local breakout scenario, based on operator configuration, the RCAF reports the RUCI to the V-PCRf;

- For a PDN connection in a home routed scenario, based on the roaming agreement with the HPLMN and operator configuration, the RCAF reports the RUCI to the H-PCRF

NOTE 2: Reporting of congestion information to the HPLMN may be used e.g. in case of a group of PLMNs which belong to a single business entity.

The RCAF determines whether a given PDN connection is served in a local breakout or a home routed roaming scenario based on the APN operator identifier received as part of the APN information from the MME or the SGSN as documented in 3GPP TS 23.401 [8] and 3GPP TS 23.060 [9], respectively.

NOTE 3: Operator configuration can be used to limit RUCI reporting on the Np interface to certain APNs only.

The RCAF maintains a context per user id and APN. The context is identified by the IMSI and the APN. It contains the following information:

- The previously reported congestion level over the Np reference point;
- The reporting restrictions received from the PCRF. The reporting restrictions are stored by the RCAF until the PCRF explicitly signals to remove the reporting restrictions.
- The logical PCRF id received from the PCRF to identify the PCRF that is the Np destination for the RCAF when sending aggregate messages.

## 4.3.2 PCRF

The PCRF is a functional element that encompasses policy control decision and flow based charging control functionalities.

The PCRF may receive RUCI from the RCAF as input for policy decisions of congestion mitigation. The PCRF may provide, update or remove the reporting restrictions of RUCI, or stop or enable RUCI reporting for a given user id and PDN ID. The PCRF may enable or disable the reporting of congestion location identifier as part of RUCI. The PCRF may also remove the context at the RCAF for a given user id and PDN ID.

NOTE: Depending on the RUCI reporting interval configured in the RCAF, a UE can move outside the area indicated without the RCAF immediately notifying the PCRF. In case the PCRF receives information about the cell currently serving a UE via Np and Gx when the location change reporting is enabled, then the information received via Gx is expected to take precedence.

## 4.3.3 H-PCRF

Functionality defined in clause 4.3.2 shall apply if UE is roaming with home-routed access scenario.

NOTE: Reporting of congestion information to the HPLMN can be used e.g. in case of a group of PLMNs which belong to a single business entity.

## 4.3.4 V-PCRF

Functionality defined in clause 4.3.2 shall apply if UE is roaming with visited access scenario.

# 4.4 Procedures over Np reference point

## 4.4.1 RUCI Report

### 4.4.1.1 General

The RCAF shall perform the RUCI reporting to the PCRF when at least one of the following conditions applies:

- the RCAF detects a UE in the congestion area for the first time;
- a reporting restriction is enabled and the congestion level set id is changed;