

ETSI TS 103 636-3 V1.3.1 (2021-12)



**DECT-2020 New Radio (NR);
Part 3: Physical layer;
Release 1**

(<https://standards.iteh.ai>)
Document Preview

[ETSI TS 103 636-3 V1.3.1 \(2021-12\)](https://standards.iteh.ai/catalog/standards/sist/4c74e85d-7bd0-4d13-af5c-f68c1d2aa833/etsi-ts-103-636-3-v1-3-1-2021-12)

<https://standards.iteh.ai/catalog/standards/sist/4c74e85d-7bd0-4d13-af5c-f68c1d2aa833/etsi-ts-103-636-3-v1-3-1-2021-12>

Reference

RTS/DECT-00372

Keywords

channel coding, DECT, DECT-2020, IMT-2020,
modulation, NR, OFDM, physical layer, radio

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://portal.etsi.org/People/CommitteeSupportStaff.aspx>

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2021.
All rights reserved.

Contents

Intellectual Property Rights	6
Foreword.....	6
Modal verbs terminology.....	6
1 Scope	7
2 References	7
2.1 Normative references	7
2.2 Informative references.....	7
3 Definition of terms, symbols and abbreviations.....	7
3.1 Terms.....	7
3.2 Symbols.....	8
3.3 Abbreviations	8
4 Physical layer principles.....	9
4.1 General description of Physical layer.....	9
4.2 Multiple access	10
4.3 Numerologies	10
4.4 Frame structure.....	11
4.5 Physical resources	12
5 Physical layer transmissions.....	15
5.1 Transmission packet structure	15
5.2 Physical resource mapping	16
5.2.1 Guard Interval (GI)	16
5.2.2 Synchronization Training Field (STF).....	16
5.2.3 Demodulation Reference Signal (DRS).....	17
5.2.4 Physical Control Channel (PCC)	17
5.2.5 Physical Data Channel (PDC).....	18
5.3 Transport block size	19
6 Generic procedures.....	20
6.1 Channel coding, rate-matching and interleaving	20
6.1.1 Overview	20
6.1.2 CRC calculation.....	20
6.1.3 Code block segmentation.....	20
6.1.4 Channel coding	22
6.1.4.1 Introduction.....	22
6.1.4.2 Turbo coding.....	22
6.1.4.2.1 Turbo encoder.....	22
6.1.4.2.2 Trellis termination for turbo encoder.....	23
6.1.4.2.3 Turbo code internal interleaver.....	24
6.1.5 Rate matching	25
6.1.5.1 Rate matching for turbo coded transport channels	25
6.1.5.2 Sub-block interleaver	25
6.1.5.3 Bit collection, selection and transmission	26
6.1.6 Code block concatenation.....	27
6.2 Pseudo-random sequence generation.....	28
6.3 Modulation	28
6.3.1 Symbol mapping.....	28
6.3.1.1 Overview	28
6.3.1.2 BPSK.....	28
6.3.1.3 QPSK	28
6.3.1.4 16-QAM.....	29
6.3.1.5 64-QAM.....	29
6.3.1.6 256-QAM.....	29
6.3.1.7 1024-QAM.....	29
6.3.2 Spatial multiplexing.....	29

6.3.3	Transmit stream mapping	30
6.3.3.1	Transmit stream mapping for spatial multiplexing and for single antenna	30
6.3.3.2	Transmit diversity precoding	30
6.3.4	Beamforming and antenna port mapping.....	32
6.3.5	OFDM signal generation	35
6.3.6	Cyclic prefix insertion	35
7	Transmission encoding.....	35
7.1	Transmitter block diagram	35
7.2	Transmission modes.....	36
7.3	Synchronization Training Field (STF) beamforming	37
7.4	Demodulation Reference Signal (DRS) beamforming.....	37
7.5	Physical Control Channel (PCC) encoding	37
7.5.1	Overall description.....	37
7.5.2	CRC calculation.....	38
7.5.2.1	Parity bit calculation	38
7.5.2.2	CRC Masking for MIMO closed loop.....	38
7.5.2.3	CRC Masking for beamforming.....	38
7.5.2.4	CRC attachment	38
7.5.3	Channel coding & rate matching	38
7.5.4	Scrambling	38
7.5.5	Symbol mapping.....	38
7.5.6	Spatial multiplexing	38
7.5.7	Transmit stream mapping	38
7.5.8	Beamforming.....	39
7.5.9	Subcarrier mapping.....	39
7.6	Physical Data Channel (PDC) encoding.....	39
7.6.1	Overall description.....	39
7.6.2	CRC calculation.....	39
7.6.3	Code block segmentation.....	39
7.6.4	Channel coding & rate matching	39
7.6.5	Code block concatenation.....	40
7.6.6	Scrambling	40
7.6.7	Symbol mapping.....	40
7.6.8	Spatial multiplexing	40
7.6.9	Transmit stream mapping	40
7.6.10	Beamforming and antenna port mapping.....	40
7.6.11	Subcarrier mapping.....	40
Annex A (normative):	Modulation and coding schemes.....	41
Annex B (normative):	Physical layer requirements for radio device classes.....	42
B.1	Introduction	42
B.2	Radio device class (μ , β , NSS, A) = (1.1.1.A)	42
B.2.1	Transmission bandwidth.....	42
B.2.2	Transmission modes.....	42
B.2.3	Modulation and coding scheme.....	42
B.2.3.1	Modulation and coding	42
B.2.3.2	Hybrid ARQ processes	42
B.2.3.3	Soft buffer size.....	42
B.2.3.4	Code block segment size.....	42
Annex C (informative):	Examples of transport block sizes and maximum achievable data rates	43
C.1	Introduction	43
C.2	Single slot transmission, single spatial stream	43
C.3	Dual slot transmission, single spatial stream.....	46
C.4	Quad slot transmission, single spatial stream.....	48

Annex D (informative): Change History50
History51

iTeh Standards
(<https://standards.iteh.ai>)
Document Preview

[ETSI TS 103 636-3 V1.3.1 \(2021-12\)](https://standards.iteh.ai/catalog/standards/sist/4c74e85d-7bd0-4d13-af5c-f68c1d2aa833/etsi-ts-103-636-3-v1-3-1-2021-12)
<https://standards.iteh.ai/catalog/standards/sist/4c74e85d-7bd0-4d13-af5c-f68c1d2aa833/etsi-ts-103-636-3-v1-3-1-2021-12>

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee Digital Enhanced Cordless Telecommunications (DECT).

The present document is part 3 of a multi-part deliverable covering the DECT-2020 New Radio (NR) technology. Full details of the entire series can be found in part 1 [1].

DECT-2020 NR is recognized in Recommendation ITU-R M.2150 [i.1] as a component RIT fulfilling the IMT-2020 requirements of the IMT-2020 use scenarios URLLC and mMTC. The Set of Radio Interface Technology (SRIT) called "DECT 5G SRIT" is involving 3GPP NR and DECT-2020 NR.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

1 Scope

The present document is one of the parts of the specification of the DECT-2020 New Radio (NR).

The present document specifies the Physical layer and interaction between PHY and MAC layer.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <https://docbox.etsi.org/Reference>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] ETSI TS 103 636-1: "DECT-2020 New Radio (NR); Part 1: Overview; Release 1".
- [2] ETSI TS 103 636-2: "DECT-2020 New Radio (NR); Part 2: Radio reception and transmission requirements; Release 1".
- [3] ETSI TS 103 636-4: "DECT-2020 New Radio (NR); Part 4: MAC layer; Release 1".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] Recommendation ITU-R M.2150: "Detailed specifications of the terrestrial radio interfaces of International Mobile Telecommunications-2020 (IMT-2020)".

3 Definition of terms, symbols and abbreviations

3.1 Terms

Void.

3.2 Symbols

For the purposes of the present document, the following symbols apply:

$\forall$	Mathematical notation for "for all"
$\wedge$	Mathematical notation for "and"
$\lfloor x \rfloor$	Mathematical notation for "floor of x" i.e. rounding towards zero
$\lceil x \rceil$	Mathematical notation for "ceiling of x" i.e. rounding towards infinity
β	Fourier transform scaling factor
μ	Subcarrier scaling factor
Δ_f^μ	Subcarrier spacing for given subcarrier scaling factor
$f_s^{\mu,\beta}$	Sample frequency
k_{OCC}^β	Occupied subcarriers for given transform scaling factor
$B_{DFT}^{\mu,\beta}$	Nominal bandwidth
$B_{TX}^{\mu,\beta}$	Transmission bandwidth
GI^μ	Guard interval for given subcarrier scaling factor
M_{symb}^{stream}	Number of modulated symbols in a spatial stream
M_{symb}	Number of modulated symbols
N_{CP}^β	Cyclic Prefix size for given transform scaling factor
N_{DFT}^β	Discrete Fourier Transform size for given Fourier transform scaling factor
N_{OCC}^β	Number of occupied subcarriers for given Fourier transform scaling factor
N_{symb}^{SLOT}	Number OFDM symbols in a slot
$N_{subslot}^{SLOT}$	Number of subslots in a slot
N_{slot}^{FRAME}	Number of slots in a frame
N_{symb}^{PACKET}	Number of OFDM symbols in a transmission packet
N_{TX}	Number of transmission antennas
N_{TX}^{eff}	Effective number of transmission antennas
N_{TS}	Number of transmit streams
N_{SS}	Number of spatial streams
N_{bps}	Number of bits per symbol for given modulation
T_{frame}	Duration of a frame
T_{slot}	Duration of a slot
$T_s^{\mu,\beta}$	Sample time interval
T_{symb}^μ	Duration of OFDM symbol for given subcarrier scaling factor

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in ETSI TS 103 636-1 [1] and the following apply:

NOTE: An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in ETSI TS 103 636-1 [1].

ARQ	Automatic Repeat reQuest
BPSK	Binary Phase Shift Keying
CP	Cyclic Prefix
CRC	Cyclic Redundancy Check
DC	Zero or DC Subcarrier
DECT	Digital Enhanced Cordless Telecommunications
DF	Data Field
DFT	Discrete Fourier Transform
DRS	Demodulation Reference Signal
FDMA	Frequency Division Multiple Access
GF	Galois Field
GI	Guard Interval
HARQ	Hybrid ARQ
MAC	Medium Access Control
OFDM	Orthogonal Frequency Division Multiplexing

PCC	Physical Control Channel
PCCC	Parallel Concatenated Convolutional Code
PDC	Physical Data Channel
PDU	Protocol Data Unit
PHY	Physical layer
QAM	Quadrature Amplitude Modulation
QPSK	Quadrature Phase Shift Keying
RD	Radio Device
SAP	Service Access Point
SS	Spatial Stream
STF	Synchronization Training Field
TDD	Time Division Duplex
TDMA	Time Division Multiple Access
TS	Transmit Stream
TX	Transmission

4 Physical layer principles

4.1 General description of Physical layer

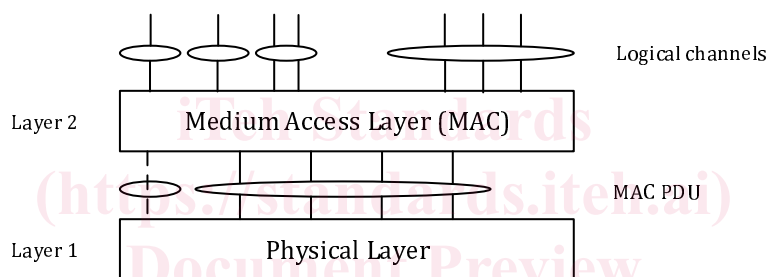


Figure 4.1-1: Radio interface protocol architecture around the Physical layer

Figure 4.1-1 shows the DECT-2020 radio interface protocol architecture around the Physical layer (PHY). The physical layer interfaces the Medium Access Control (MAC) layer. The circles between different layer/sub-layers indicate Service Access Points (SAPs). The physical layer offers Physical Control Channel (PCC) and Physical Data Channel (PDC) to transmit MAC PDU(s). Different physical channels are characterized by how the information is transferred over the radio interface within single transmission packet.

The physical layer performs the following functions in order to provide the data transport service:

- Error detection on the physical channels and indication to higher layers
- FEC encoding/decoding of the physical channels
- Hybrid ARQ soft-combining
- Rate matching of the coded physical channel data to physical channels
- Mapping of the coded physical channel data onto physical channels
- Modulation and demodulation of physical channels
- Frequency and time synchronization
- Radio characteristics measurements and indication to higher layers
- Multiple Input Multiple Output (MIMO) antenna processing
- Transmit Diversity (TX diversity)
- Beamforming

The physical channels defined are:

- the Physical Control Channel (PCC);
- the Physical Data Channel (PDC).

The modulation schemes supported are:

- BPSK;
- QPSK;
- 16-QAM;
- 64-QAM;
- 256-QAM; and
- 1024-QAM.

The channel coding scheme for transport blocks in all physical channels is Turbo Coding with a coding rate of $R=1/3$, two 8-state constituent encoders and a turbo code internal interleaver. Trellis termination is used for the turbo coding. Before the turbo coding, transport blocks are segmented into byte aligned segments with a maximum codeblock size. Error detection is supported by the use of 16 or 24 bit CRC as specified for a given physical channel.

4.2 Multiple access

The multiple access scheme for the DECT-2020 physical layer is based on Time Division Duplex (TDD) combined with Frequency Division Multiple Access (FDMA) and Time Division Multiple Access (TDMA). The physical layer operates with non-overlapping channels in frequency domain and non-overlapping transmission slots in time domain. Radio channel spacing is defined in ETSI TS 103 636-2 [2].

The modulation within the transmitted packets is Orthogonal Frequency Division Multiplexing (OFDM) with a Cyclic Prefix (CP).

Both frame duration (10 ms) and slot duration (0,41667 ms) ensure coexistence with legacy DECT systems.

4.3 Numerologies

In the present document, unless otherwise noted, the size of various fields in the time domain are expressed in terms of basic parameters. Subcarrier spacing is defined by the subcarrier scaling factor μ , resulting either in 27 kHz, 54 kHz, 108 kHz or 216 kHz OFDM subcarriers spacing Δ_f^μ . In addition, the Fourier transform scaling factor β can be set to allow different transmission bandwidths for each configuration of the subcarrier spacing. The numerologies listed in table 4.3-1 support multiple throughput and latency configurations for the network. In the table $B_{DFT}^{\mu,\beta}$ denotes the nominal bandwidth, $B_{TX}^{\mu,\beta}$ denotes the transmission bandwidth consisting of N_{OCC}^β occupied subcarriers and the empty DC carrier in the center of the transmission bandwidth, $T_s^{\mu,\beta}$ denotes the critical sample rate, N_{DFT}^β the Fourier transform size, N_{CP}^β denotes the cyclic prefix size in samples.

Table 4.3-1: Supported transmission numerologies

μ	β	$B_{DFT}^{\mu,\beta}$ [kHz]	$T_s^{\mu,\beta}$	N_{DFT}^{β}	N_{CP}^{β}	N_{OCC}^{β}	$B_{TX}^{\mu,\beta}$ [kHz]
μ	1	1 728	5,7870E-07	64	8	56	1 539
Δ_f^{μ} [kHz]	27	3 456	2,8935E-07	128	16	112	3 051
T_{symb}^{μ} [us]	41,667	6 912	1,4468E-07	256	32	224	6 075
$N_{symb}^{SLOT,\mu}$	10	8	7,2338E-08	512	64	448	12 123
$N_{subslot}^{SLOT,\mu}$	2	12	20 736	4,8225E-08	768	96	672
GI^{μ} [us]	18,52	16	27 648	3,6169E-08	1 024	128	896
μ	2	3 456	2,8935E-07	64	8	56	3 078
Δ_f^{μ} [kHz]	54	6 912	1,4468E-07	128	16	112	6 102
T_{symb}^{μ} [us]	20,833	4	13 824	7,2338E-08	256	32	224
$N_{symb}^{SLOT,\mu}$	20	8	27 648	3,6169E-08	512	64	448
$N_{subslot}^{SLOT,\mu}$	4	12	41 472	2,4113E-08	768	96	672
GI^{μ} [us]	20,83	16	55 296	1,8084E-08	1 024	128	896
μ	4	6 912	1,4468E-07	64	8	56	6 156
Δ_f^{μ} [kHz]	108	13 824	7,2338E-08	128	16	112	12 204
T_{symb}^{μ} [us]	10,417	4	27 648	3,6169E-08	256	32	224
$N_{symb}^{SLOT,\mu}$	40	8	55 296	1,8084E-08	512	64	448
$N_{subslot}^{SLOT,\mu}$	8	12	82 944	1,2056E-08	768	96	672
GI^{μ} [us]	10,42	16	110 592	9,0422E-09	1 024	128	896
μ	8	13 824	7,2338E-08	64	8	56	12 312
Δ_f^{μ} [kHz]	216	27 648	3,6169E-08	128	16	112	24 408
T_{symb}^{μ} [us]	5,208	4	55 296	1,8084E-08	256	32	224
$N_{symb}^{SLOT,\mu}$	80	8	110 592	9,0422E-09	512	64	448
$N_{subslot}^{SLOT,\mu}$	16	12	165 888	6,0282E-09	768	96	672
GI^{μ} [us]	10,42	16	221 184	4,5211E-09	1 024	128	896

4.4 Frame structure

The radio frame has a duration of $T_{frame} = 10\text{ ms}$ and consists of $N_{slot}^{FRAME} = 24$ slots with a slot duration of $T_{slot} = 0,41667\text{ ms}$ as depicted in figure 4.4-1.

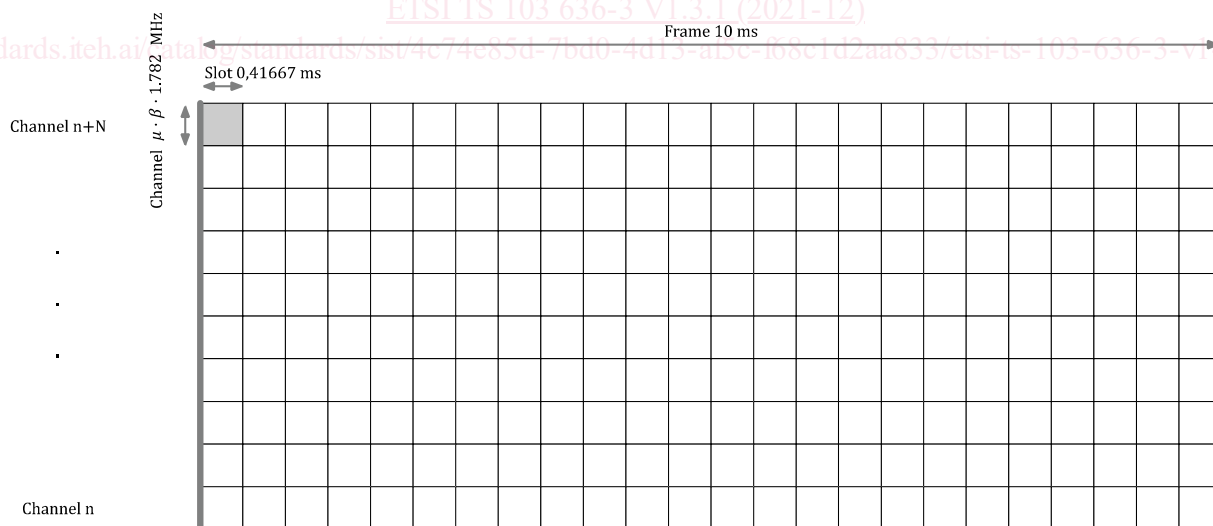


Figure 4.4-1: DECT-2020 frame structure

Each slot consists of $N_{symb}^{SLOT,\mu} = 10, 20, 40$ or 80 OFDM symbols depending on subcarrier scaling factor μ . Slot is further divided into $N_{subslot}^{SLOT,\mu}$ subslots according to the table 4.3-1 for each subcarrier scaling μ . Packet transmission duration is integer multiple of subslots.

Basic channel width is 1,728 MHz. Multiple adjacent basic channels can be aggregated with β and μ to form a wider transmission bandwidth ranging from 1,728 MHz to 221,184 MHz. Channel raster and numbering is specified in ETSI TS 103 636-2 [2].

4.5 Physical resources

Physical resources are mapped to frequency domain OFDM symbol $(s, k, l)_\beta$, where s may denote either transmit stream or spatial stream index, k denotes the subcarrier index and l denotes the OFDM symbol position in the time domain relative to the start of the transmission packet as depicted in figure 4.5-1. The occupied subcarriers indices are:

$$k_{occ}^\beta = \left[-\frac{N_{occ}^\beta}{2}, \dots, -1, 1, \dots, \frac{N_{occ}^\beta}{2} \right]$$

The remaining subcarriers are the guard bands and the zero carrier (or DC carrier) which are not used for data transmission. Example of resource mappings are depicted in figures 4.5-2 and 4.5-3.

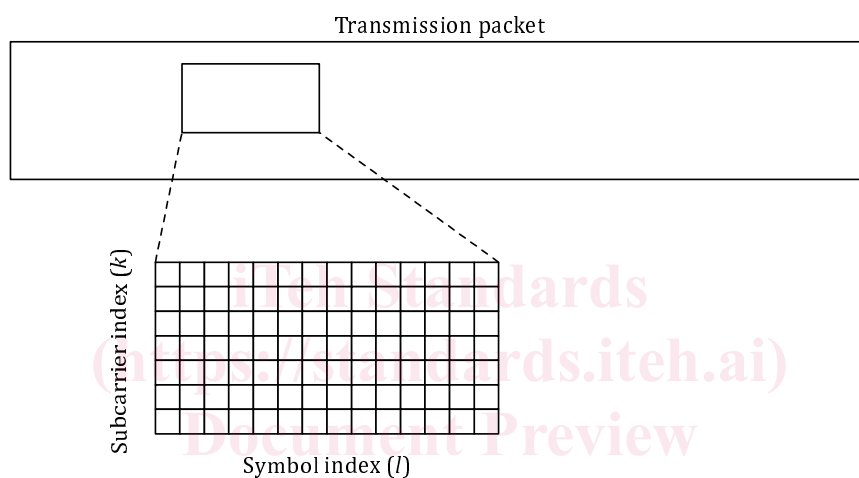


Figure 4.5-1: Resource grid and indexing

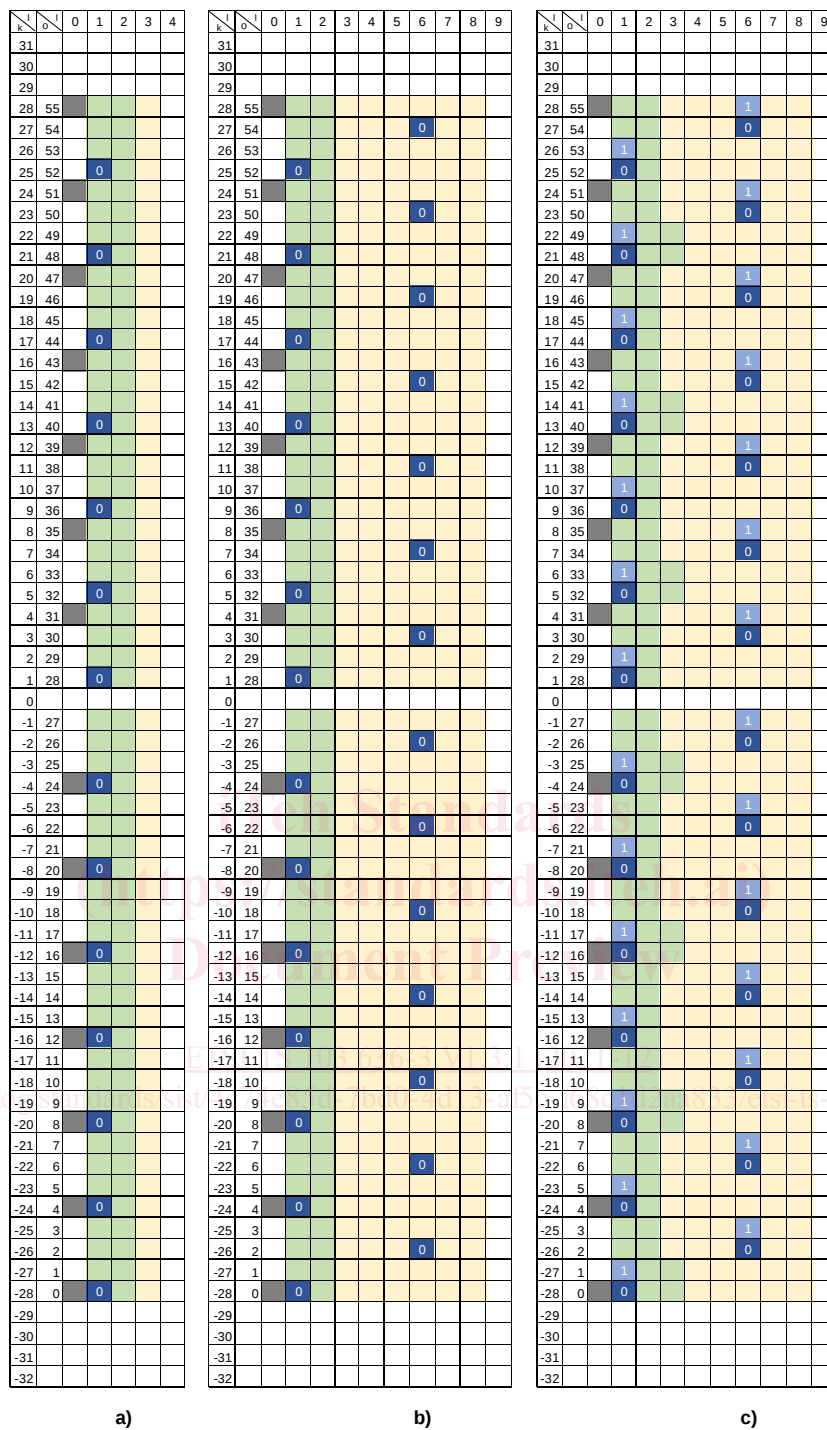


Figure 4.5-2: Resource mapping for $(\mu, \beta) = (*, 1)$
a) Transmission from single effective antenna of one subslot duration
b) Transmission from single effective antenna of two subslots duration
c) Transmission from two effective antennas of two subslots duration

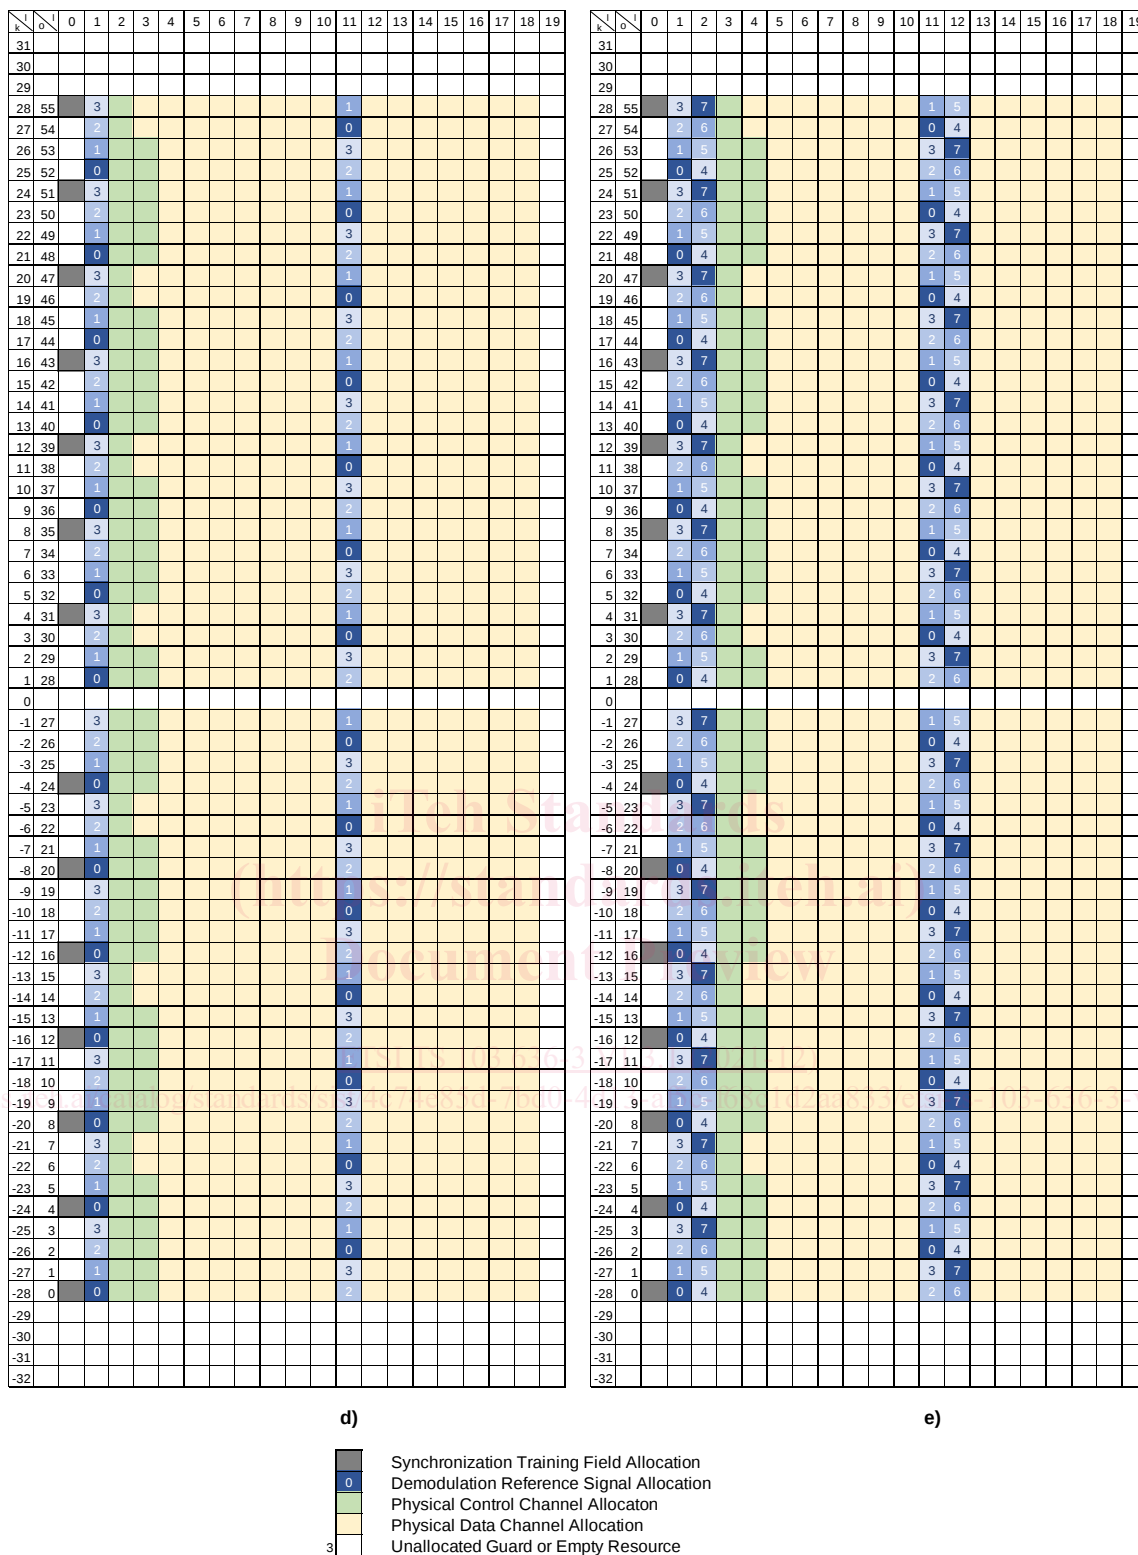


Figure 4.5-3: Resource mapping for $(\mu, \beta) = (*, 1)$
d) Transmission from four effective antennas of four subslots duration
e) Transmission from eight effective antennas of four subslots duration