

ETSI EN 300 132-2 V2.7.1 (2022-09)



**Environmental Engineering (EE);
Power supply interface at the input of
Information and Communication Technology (ICT) equipment;
Part 2: -48 V Direct Current (DC)**

[ETSI EN 300 132-2 V2.7.1 \(2022-09\)](https://standards.iteh.ai/catalog/standards/sist/e12c6242-7737-4ff7-8a2d-4598685b2744/etsi-en-300-132-2-v2-7-1-2022-09)

<https://standards.iteh.ai/catalog/standards/sist/e12c6242-7737-4ff7-8a2d-4598685b2744/etsi-en-300-132-2-v2-7-1-2022-09>

Reference

REN/EE-02101

Keywords

interface, power supply

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from:

<http://www.etsi.org/standards-search>

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at

<https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx>

If you find errors in the present document, please send your comment to one of the following services:

<https://standards.etsi.org/People/CommitteeSupportStaff.aspx>

If you find a security vulnerability in the present document, please report it through our

Coordinated Vulnerability Disclosure Program:

<https://www.etsi.org/standards/coordinated-vulnerability-disclosure>

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.

The content of the PDF version shall not be modified without the written authorization of ETSI.

The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2022.
All rights reserved.

Contents

Intellectual Property Rights	5
Foreword.....	5
Modal verbs terminology.....	6
1 Scope	7
2 References	7
2.1 Normative references	7
2.2 Informative references.....	8
3 Definition of terms, symbols and abbreviations.....	9
3.1 Terms.....	9
3.2 Symbols.....	10
3.3 Abbreviations	10
4 Requirements.....	10
4.0 Power interface "A"	10
4.1 Nominal voltage	11
4.2 Normal service voltage range at interface "A"	11
4.3 Abnormal service voltage range at interface "A"	12
4.3.1 Abnormal service voltage range under steady state conditions	12
4.3.2 Abnormal conditions: voltage variations, dips and short interruptions.....	12
4.3.3 Voltage transients	13
4.3.3.1 Voltage transient due to short-circuit and protective device clearance	13
4.3.3.2 Short voltage transient due to switching and lightning	13
4.3.4 Recovery from voltage transients	14
4.4 Voltage changes due to the regulation of the power supply	15
4.5 Power supply protection at interface "A"	15
4.6 Maximum current drain.....	15
4.7 Inrush Current on connection of interface "A"	16
4.7.1 Limits.....	16
4.7.2 Measurements	17
4.8 Conducted immunity requirements of the ICT equipment at interface "A": narrowband noise.....	18
4.9 Conducted emissions requirements of the ICT equipment at interface "A"	20
5 Earthing and bonding	21
Annex A (informative): Identification of interface "A"	22
Annex B (informative): -60 VDC systems	23
Annex C (informative): Guide for measuring inrush current and for transferring the recorded pulses onto the limit chart.....	24
C.1 Measurement	24
C.2 Pulse waveform transformation.....	24
C.3 Measurement of inrush current with filter capacitor current pulses.....	27
Annex D (informative): Test arrangements for the injection of electrical noise at interface "A"	30
Annex E (informative): Wideband noise.....	31
E.0 Wideband noise	31
E.1 Emission of wideband noise.....	31
E.1.0 General	31
E.1.1 Assessment of wideband noise	31

E.2	How to calculate wideband emission	31
Annex F (informative):	Protection dimensioning.....	35
Annex G (informative):	Effects of protective device operation transients in the power distribution	36
Annex H (normative):	Verification of measurement network defined in clause 4.9	37
Annex I (informative):	Bibliography	38
History		39

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ETSI EN 300 132-2 V2.7.1 \(2022-09\)](https://standards.iteh.ai/catalog/standards/sist/e12c6242-7737-4ff7-8a2d-4598685b2744/etsi-en-300-132-2-v2-7-1-2022-09)

<https://standards.iteh.ai/catalog/standards/sist/e12c6242-7737-4ff7-8a2d-4598685b2744/etsi-en-300-132-2-v2-7-1-2022-09>

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "*Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards*", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<https://ipr.etsi.org/>).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM®** and the GSM logo are trademarks registered and owned by the GSM Association.

Foreword

This European Standard (EN) has been produced by ETSI Technical Committee Environmental Engineering (EE).

The present document concerns the requirements for the interface between ICT equipment and its power supply, and includes requirements relating to its stability and measurement. Various other references and detailed measurement and test arrangements are contained in informative annexes.

The present document is part 2 of a multi-part deliverable covering Environmental Engineering (EE); Power supply interface at the input to Information and Communication Technology (ICT) equipment, as identified below:

- Part 1: "Alternating Current (AC)";
- Part 2: "-48 V Direct Current (DC)";**
- Part 3: "Up to 400 V Direct Current (DC)".

National transposition dates	
Date of adoption of this EN:	12 September 2022
Date of latest announcement of this EN (doa):	31 December 2022
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	30 June 2023
Date of withdrawal of any conflicting National Standard (dow):	30 June 2023

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the [ETSI Drafting Rules](#) (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

iTeh STANDARD PREVIEW
(standards.iteh.ai)

[ETSI EN 300 132-2 V2.7.1 \(2022-09\)](#)

<https://standards.iteh.ai/catalog/standards/sist/e12c6242-7737-4ff7-8a2d-4598685b2744/etsi-en-300-132-2-v2-7-1-2022-09>

1 Scope

The present document contains requirements and measurements methods for the physical interface "A" that is situated between the power supply system(s) and the power consuming ICT equipment.

The nominal voltage at power interface "A" of ICT equipment defined in the present document is DC voltage -48 V.

The DC power can be supplied by a DC output power system (e.g. based on AC rectifiers on grid or DC/DC converters on solar system, fuel cell, DC engine or fuel cell generator) and also directly supplied by a battery backup in this DC power system. The purpose of the present document is to be able to use a power supply system with the same characteristics for all ICT equipment defined in the area of application:

- to facilitate inter working of different types of load units;
- to facilitate the standardization of ICT equipment;
- to facilitate the installation, operation and maintenance in the same network of ICT equipment and systems from different origins.

The present document aims at providing electrical compatibility between the power supply equipment and the power consuming ICT equipment, between different system blocks and loads connected to the same power supply feeding the interface "A" (e.g. control/monitoring, cooling system, etc.).

The requirements are defined for:

- the power supply input of any type of ICT equipment installed at telecommunication centres that are connected to interface "A" powered by DC;
- any type of ICT equipment, installed in access networks and customers' premises, the DC interface "A" of which is also used by equipment requiring a DC supply source;
- any type of ICT equipment powered by DC, used in the fixed and mobile networks installed in different locations such as buildings, shelters, street cabinets, outdoor installations.

Disturbances on the power supply interface "A" relating to the continuous wave phenomena below 20 kHz are covered within the present document.

The present document does not cover safety requirements, they are covered by relevant safety standards.

The present document does not cover EMC requirements, they are covered by relevant EMC standards.

NOTE: Annex B gives guidance on -60 VDC supply systems.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at <https://docbox.etsi.org/Reference/>.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

- [1] ETSI EN 300 253: "Environmental Engineering (EE); Earthing and bonding of ICT equipment powered by -48 VDC in telecom and data centres".

- [2] Void.
- [3] Void.
- [4] Void.
- [5] EN 61000-4-5: "Electromagnetic compatibility (EMC) - Part 4-5: Testing and measurement techniques - Surge immunity test" (produced by CENELEC).
- [6] Void.
- [7] EN 61000-4-29: "Electromagnetic compatibility (EMC) - Part 4-29: Testing and measurement techniques - Voltage dips, short interruptions and voltage variations on d.c. input power port immunity tests" (produced by CENELEC).

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

- [i.1] Recommendation ITU-T Q.551: "Transmission characteristics of digital exchanges".
- [i.2] Recommendation ITU-T Q.552: "Transmission characteristics at 2-wire analogue interfaces of digital exchanges".
- [i.3] Recommendation ITU-T Q.553: "Transmission characteristics at 4-wire analogue interfaces of digital exchanges".
- [i.4] Recommendation ITU-T Q.554: "Transmission characteristics at digital interfaces of digital exchanges".
- [i.5] ETSI TR 100 283: "Environmental Engineering (EE); Transient voltages at Interface "A" on telecommunications direct current (dc) power distributions".
- [i.6] US Department of Defence MIL-STD-461E: "Requirements for the control of electromagnetic interference characteristics of subsystems and equipment".
- [i.7] Void.
- [i.8] Recommendation ITU-T O.41: "Psophometer for use on telephone-type circuits".
- [i.9] IEC 60050-601: "International Electrotechnical Vocabulary. Chapter 601: Generation, transmission and distribution of electricity - General" (Area 826 "Electrical installations", section 826-11 "Voltages and currents").
- [i.10] EN 60269-1: "Low-voltage fuses - Part 1: General requirements" (produced by CENELEC).
- [i.11] EN 60934: "Circuit-breakers for equipment (CBE)" (produced by CENELEC).
- [i.12] IEC 60050-351: 2013: "International Electrotechnical Vocabulary. Part 351: Control technology".

3 Definition of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the following terms apply:

abnormal service voltage range: range of steady state voltage over which the equipment will not be expected to maintain normal service but will survive undamaged

customer premises: location which is the sole responsibility of the customer

DC power return conductor: 0 V power supply conductor

NOTE: Also called "battery return".

fully equipped equipment: configuration that corresponds to the maximum power consumption measured at -48 VDC with the equipment in operating conditions (e.g. not in standby mode)

NOTE: When there are several fully equipped configurations because of different combinations of possible boards, the configuration with the boards that gives the highest power consumption should be considered.

ICT equipment: device, in the telecommunication network infrastructure, that provides an ICT service

interface "A": terminals at which the power supply is connected to the system block

NOTE 1: See also figure 1 and annex A.

NOTE 2: This is a functional definition and not an exact depiction of the physical location.

malfunction: termination of the normal service

maximum steady state input current (I_m): maximum steady state input current, stated by the manufacturer, for a fully equipped equipment under test connected to interface "A" at nominal voltage

nominal voltage: value of the voltage by which the electrical installation or part of the electrical installation is designated and identified

NOTE: As defined in IEC 60050-601 [i.9].

normal service: service mode where ICT equipment operates within its specification which includes a defined restart time after malfunction or full interruption

normal service voltage range: range of steady state voltages over which the equipment will maintain normal service

power supply: power source to which ICT equipment is intended to be connected

service voltage: value of the voltage under normal conditions, at a given instant and a given point of the system

NOTE: As defined in IEC 60050-601 [i.9].

steady-state: state of a system at which all state and output variables remain constant in time while all input variables are constant

NOTE: This is definition 351-45-10 in IEC 60050-351:2013 [i.12].

system block: functional group of equipment depending for its operation and performance on its connection to the same power supply

NOTE: A system block may consist of equipment or a functional group of equipment. Different examples of configurations at interface "A" are given in annex A.

telecommunication centre: location where ICT equipment is installed and which is the sole responsibility of the operator

3.2 Symbols

For the purposes of the present document, the following symbols apply:

I_t	instantaneous inrush current
I_m	maximum steady state input current
L	inductance of inductive element of LISN
R	resistance of resistive element of LISN
t	time
$U_{\text{ps},\text{eff}}$	effective psophometric voltage
U_{rms}	RMS voltage
Z_c	capacitive impedance of immunity measurement circuit
Z_m	resistive impedance of immunity measurement circuit
μs	microsecond

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

AC	Alternating Current
DC	Direct Current

NOTE: Also when used as a suffix to units of measurement.

EMC	ElectroMagnetic Compatibility
ESR	Equivalent Series Resistance
EUT	Equipment Under Test
HOD	High-Ohmic Distributions
ICT	Information and Communication Technology
IL	Insertion Loss
LISN	Line Impedance Stabilization Network
LOD	Low-Ohmic Distributions
RF	Radio Frequency
rms	root mean square
TR	Technical Report
VDC	Voltage Direct Current

NOTE: Also when used as a suffix to units of measurement.

4 Requirements

4.0 Power interface "A"

The power supply interface, interface "A" of figure 1, is a physical point to which all the requirements are related.

This point is situated between the power supply system(s) and the power consuming ICT equipment.

An example of a configuration in which interface "A" is identified is given in annex A.

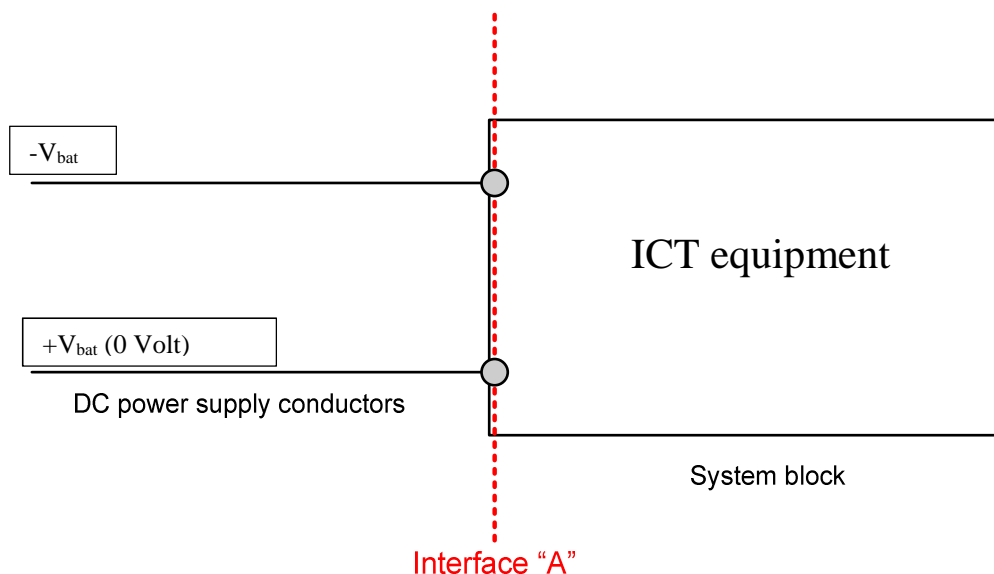


Figure 1: Identification of interface "A"

4.1 Nominal voltage

The nominal voltage at interface "A" shall be -48 VDC with positive conductor connected to earth as defined in ETSI EN 300 253 [1].

NOTE 1: The positive conductor, also called DC return, can be (see ETSI EN 300 253 [1]):

- Isolated DC return: this is a DC power system in which the DC power return conductor has a single point connection to the bonding network. Equipment intended for this power distribution has a floating DC power at the power input terminal.
- Common DC return: this is a DC power system in which the return conductor is connected to the bonding network at many points. Equipment intended for this power distribution can have the DC return earthed at the power input terminal.

NOTE 2: In most cases the nominal voltage of interface "A" is based on a 24 cells lead-acid battery. Use of other technologies, such as Lithium-ion batteries, are increasing and are compatible with the requirements of the present document

4.2 Normal service voltage range at interface "A"

The normal service voltage range for the -48 VDC nominal supply at interface "A" shall be from -40,5 VDC to -57,0 VDC.

NOTE 1: The maximum voltage is based on a 0,3 V drop in the distribution loop and a battery voltage of 2,35 V/cell plus 0,5 % for regulation.

There shall be no degradation of service performance when ICT equipment is operating at voltages within the normal service voltage range including voltage variation inside the normal voltage range.

This requirement shall be verified by applying at interface "A" a voltage step test with specification and parameters defined in table 1. The testing and measurement techniques are described in EN 61000-4-29 [7].

The test shall apply to equipment with single and multiple power supply "A" interface inputs.

Table 1

Test level of Normal service voltage step variation	Voltage step duration	Basic standard for testing	Rise and fall time of voltage step	Performance criteria
From -40,5 V to -57,0 VDC and from -57 VDC to -40,5 VDC	0,1 s	EN 61000-4-29 [7]	Between 1 μ s and 50 μ s on 100 Ω resistive load (see basic standard for test generator)	No degradation in the service performance during and after the test
From -57,0 V to -40,5 VDC and from -40,5 VDC to -57 VDC	0,1 s			

In the case of ICT equipment with power supply input redundancy (e.g. Input 1 and Input 2), this test shall be performed:

- with Inputs 1 and 2 powered simultaneously and applying the test in table 1 on both inputs simultaneously;
- with Inputs 1 and 2 powered simultaneously and applying the test in table 1 on one input (either Input 1 or 2);
- with either Input 1 or 2 powered and no power on the other power input and applying the test in table 1 on the powered input.

NOTE 2: The minimum voltage is based on the voltage drop in the distribution network and a battery cell end of discharge voltage.

NOTE 3: The voltages specified are measured at interface "A". It should be noted that if interface "A" is at any point other than the ICT equipment interface as presented in annex A, there will be a voltage drop between interface "A" and the equipment terminals.

4.3 Abnormal service voltage range at interface "A"

4.3.1 Abnormal service voltage range under steady state conditions

ICT equipment designed to work at 48 VDC nominal voltage at the interface "A" shall not suffer any damage when subjected to the following voltage ranges defined in table 2.

Table 2

0,0 V	to	-40,5 VDC
-57,0 VDC	to	-60,0 VDC

Following the restoration of the supply to the normal voltage range, the power conversion and management systems on the load side of interface "A" shall automatically restore normal service. The ICT equipment shall then resume operation according to its specifications. The abnormal service voltage shall not lead to the disconnection of the power supply e.g. by causing circuit breakers, fuses or other such devices to operate.

NOTE: It is acceptable that the system may restart when the voltage is -40,5 VDC or anywhere within the nominal service voltage range and/or after a time delay.

4.3.2 Abnormal conditions: voltage variations, dips and short interruptions

ICT equipment shall comply with the requirements defined in this clause when subject to the abnormal voltage range defined in table 3 that can be present at the interface "A".

This requirement shall be verified by applying at interface "A" a voltage step test with specification and parameters defined in table 3. The testing and measurement techniques are described in EN 61000-4-29 [7].

The test shall apply to equipment with single and multiple power supply inputs.