

# INTERNATIONAL STANDARD



## AMENDMENT 1

**Information technology – Implementation and operation of customer premises cabling –**

**Part 3: Testing of optical fibre cabling**

**Document Preview**

[ISO/IEC 14763-3:2014/Amd.1:2018](https://standards.iteh.ai/iso/IEC/14763-3/2014/Amd.1/2018)

<https://standards.iteh.ai/catalog/standards/iso/b40c8ea3-759a-4d80-9d93-f4997077bc47/iso-iec-14763-3-2014-amd-1-2018>



**THIS PUBLICATION IS COPYRIGHT PROTECTED**  
**Copyright © 2018 ISO/IEC, Geneva, Switzerland**

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about ISO/IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

IEC Central Office  
3, rue de Varembé  
CH-1211 Geneva 20  
Switzerland

Tel.: +41 22 919 02 11  
[info@iec.ch](mailto:info@iec.ch)  
[www.iec.ch](http://www.iec.ch)

**About the IEC**

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

**About IEC publications**

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigenda or an amendment might have been published.

**IEC Catalogue - [webstore.iec.ch/catalogue](http://webstore.iec.ch/catalogue)**

The stand-alone application for consulting the entire bibliographical information on IEC International Standards, Technical Specifications, Technical Reports and other documents. Available for PC, Mac OS, Android Tablets and iPad.

**IEC publications search - [webstore.iec.ch/advsearchform](http://webstore.iec.ch/advsearchform)**

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee,...). It also gives information on projects, replaced and withdrawn publications.

**IEC Just Published - [webstore.iec.ch/justpublished](http://webstore.iec.ch/justpublished)**

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and also once a month by email.

**Electropedia - [www.electropedia.org](http://www.electropedia.org)**

The world's leading online dictionary of electronic and electrical terms containing 21 000 terms and definitions in English and French, with equivalent terms in 16 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.

**IEC Glossary - [std.iec.ch/glossary](http://std.iec.ch/glossary)**

67 000 electrotechnical terminology entries in English and French extracted from the Terms and Definitions clause of IEC publications issued since 2002. Some entries have been collected from earlier publications of IEC TC 37, 77, 86 and CISPR.

**IEC Customer Service Centre - [webstore.iec.ch/csc](http://webstore.iec.ch/csc)**

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: [sales@iec.ch](mailto:sales@iec.ch).

[ISO/IEC 14763-3:2014/Amd 1:2018](http://www.iec.ch/14763-3-2014/amd-1-2018)

<https://standards.iteh.ai/catalog/standards/iso/b40c8ea3-759a-4d80-9d93-f4997077bc47/iso-iec-14763-3-2014-amd-1-2018>

# INTERNATIONAL STANDARD



## AMENDMENT 1

Information technology – Implementation and operation of customer premises  
cabling –  
Part 3: Testing of optical fibre cabling  
*(<https://standards.iteh.ai>)*  
Document Preview

[ISO/IEC 14763-3:2014/Amd 1:2018](https://standards.iteh.ai/catalog/standards/iso/b40c8ea3-759a-4d80-9d93-f4997077bc47/iso-iec-14763-3-2014-amd-1-2018)

<https://standards.iteh.ai/catalog/standards/iso/b40c8ea3-759a-4d80-9d93-f4997077bc47/iso-iec-14763-3-2014-amd-1-2018>

INTERNATIONAL  
ELECTROTECHNICAL  
COMMISSION

ICS 35.200

ISBN 978-2-8322-5976-4

**Warning! Make sure that you obtained this publication from an authorized distributor.**

## FOREWORD

This amendment has been prepared by subcommittee SC 25: Interconnection of information technology equipment, of ISO/IEC joint technical committee 1: Information technology.

This document has been approved by vote of the member bodies, and the voting results may be obtained from the address given on the second title page.

**IMPORTANT – The 'colour inside' logo on the cover page of this publication indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.**

## INTRODUCTION to the amendment

This document contains information for inspecting end faces of the different kinds of installed fibre optic cabling interfaces and connectors of test cords and recommendations for cleaning these interfaces, and replaces the normative Annex B and deletes the informative Annex H of ISO/IEC 14763-3:2014.

## Document Preview

Additional information regarding channel and link testing is provided to Annex E.

[ISO/IEC 14763-3:2014/Amd 1:2018](#)


<https://standards.iteh.ai/catalog/standards/iso/b40c8ea3-759a-4d80-9d93-f4997077bc47/iso-iec-14763-3-2014-amd-1-2018>

### Introduction

*Replace paragraphs 1 to 3, including Figure 1, with the following:*

This International Standard has been prepared in support of International Standard series ISO/IEC 11801.

Figure 1 below shows the inter-relationship between the ISO/IEC 11801 series and other International Standards and for cabling systems with related standards.

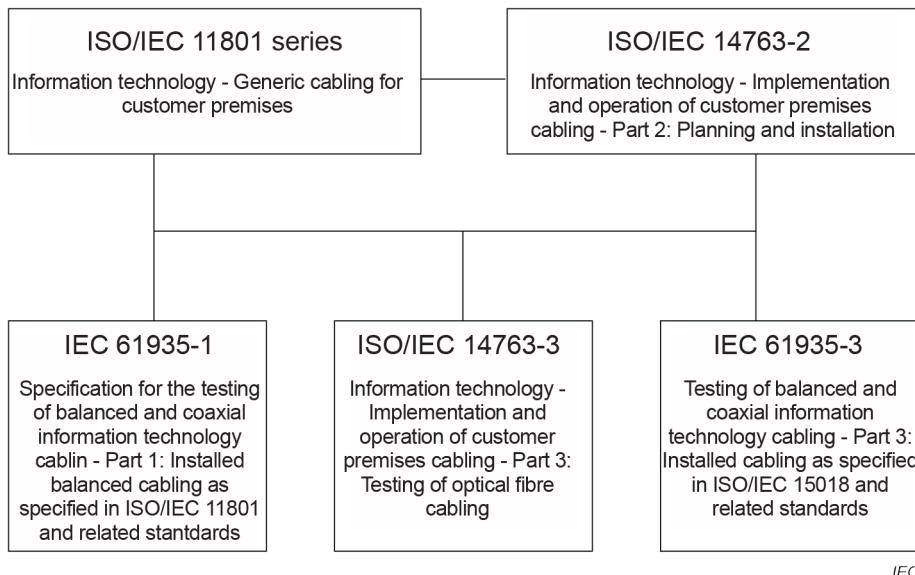

NOTE ISO/IEC 15018 has been replaced by ISO/IEC 11801-4.

**Figure 1 – Relationship of related International Standards**

ISO/IEC 14763-3 details the inspection and test procedures for optical fibre cabling,

- a) designed in accordance with premises cabling standards including the ISO/IEC 11801 series, and
- b) installed according to the requirements and recommendations of ISO/IEC 14763-2.

*In the NOTE, replace "ISO/IEC 11801" with "ISO/IEC 11801-1".*

[ISO/IEC 14763-3:2014/Amd 1:2018](https://standards.iec.ch/IEC/IEC%2014763-3%202014%20Amd%201%202018.pdf)

<https://standards.iec.ch/IEC/IEC%2014763-3%202014%20Amd%201%202018.pdf>

*Replace "ISO/IEC 11801, ISO/IEC 24764, ISO/IEC 24702 and ISO/IEC 15018" with "the ISO/IEC 11801 series".*

## 2 Normative references

*Replace the reference to ISO/IEC 11801 with the following new reference:*

ISO/IEC 11801-1, *Information technology – Generic cabling for customer premises – Part 1: General requirements*

*Replace the reference to IEC 61300-3-35:2009 with the following new reference:*

IEC 61300-3-35, *Fibre optic interconnecting devices and passive components – Basic test and measurement procedures – Part 3-35: Examinations and measurements – Visual inspection of fibre optic connectors and fibre-stub transceivers*

## Clauses 3, 6, 8, 9, 10, E.1, F.1, G.1 and G.2

*Replace all instances of "ISO/IEC 11801" in these clauses with "ISO/IEC 11801-1".*

### 3.1 Terms and definitions

Add the following new terms and definitions:

#### 3.1.25

##### **defect**

surface feature such as pits, chips and loose debris

#### 3.1.26

##### **loose debris**

particles and debris on the surface that can be removed by cleaning

#### 3.1.27

##### **pit**

permanent non-linear surface damage

#### 3.1.28

##### **scratch**

permanent linear surface damage

### 3.2 Abbreviations

Add the following new abbreviation:

LC LC connector

Replace the existing MPO abbreviation with the following:

MPO Multi-fibre Push On connector (based on rectangular ferrule)

#### 9.1.1.1 General

[ISO/IEC 14763-3:2014/Amd 1:2018](https://standards.iteh.ai/iso/iec/14763-3-2014/amd-1-2018)

Add the following new paragraphs after the first paragraph:

According to ISO/IEC 11801-1, a channel does not include the connector on the equipment cords that interfaces with the network equipment. The optical attenuation limits specified for network equipment take into account the attenuation associated with the connections of the equipment to the installed cabling.

The testing of a channel utilizes the customer's equipment cords at both ends of the channel and these cords are left in place after testing. The channel test method is normally used to measure the attenuation of a channel at the time of service implementation or maintenance.

The channel and link test method requires a new reference for any change of connection at the light source and/or the power meter between tests since the connection between source and connected cord should never be disturbed after a reference measurement has been taken.

Inspect and clean when necessary the connector interfaces of the source, the launch test cord, the tail test cord and substitution test cord.

Allow sufficient time for light source stabilization in accordance with light source manufacturer's recommendations.

### 9.1.1.2 Enhanced three-test-cord attenuation measurement test method of installed channels

Replace 9.1.1.2 with the following:

#### 9.1.1.2 Channel test method

The procedure for channel testing is as follows.

a) Connect the launch test cord (LTC) to the light source (LS) at one end and to the equipment (EQP) cord at the other end. Connect equipment cord to the power meter (PM). Allow sufficient time for the light source stabilization in accordance with light source manufacturer's recommendations. (See Figure 8). Since this reference measurement is carried out with a near end EQP cord, the defect of near end EQP cord may not be found. When this test method is used, the quality of the near end EQP cord shall comply with the requirement.

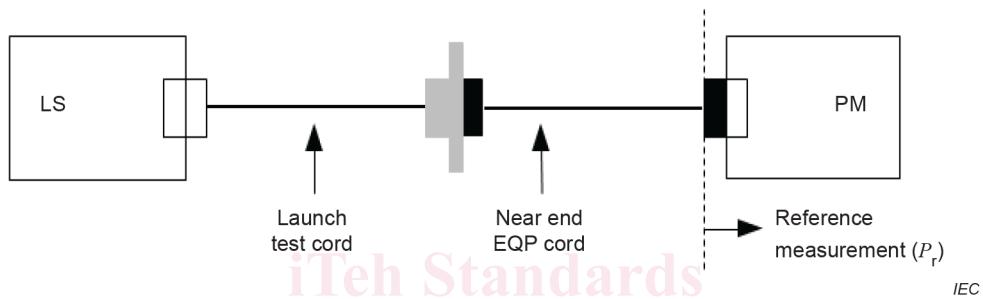


Figure 8 – Connection of LS – LTC – Near end EQP cord – PM for reference setting

b) The reference measurement,  $P_r$ , shall be recorded in watts (W) or decibel-milliwatts (dBm).

c) The near end EQP cord is disconnected from the power meter and the LTC-EQP cord combination is reconnected to the fixed cable of the channel under test.

d) At the far end of the channel, connect the far end EQP cord to the power meter, see Figure 20).

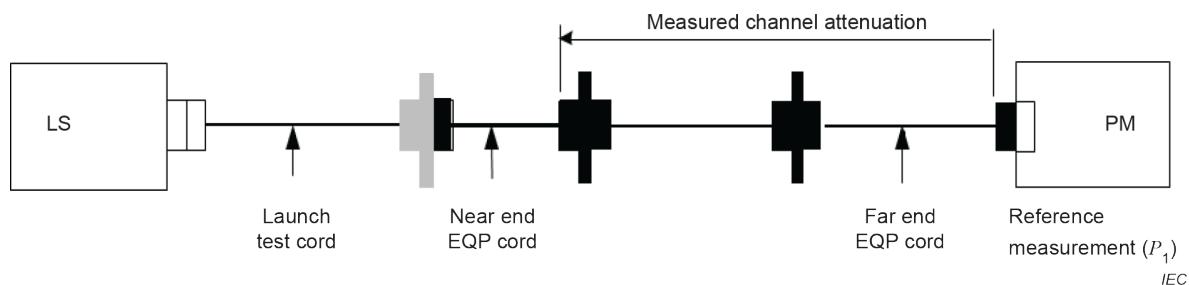


Figure 20 – Connections to channel test for attenuation measurement

e) The power  $P_1$  is measured directly at the far end EQP cord. The measurement,  $P_1$ , shall be recorded in watts (W) or decibel-milliwatts (dBm).

f) The attenuation of the channel is:

$$A = P_r - P_1 \quad (\text{dB}) \quad (1)$$

where  $P_1$  and  $P_r$  are expressed in dBm.

If  $P_1$  and  $P_r$  are expressed in W, then the measured attenuation can be calculated as follows:

$$A = -10 \lg(P_1/P_r) \quad (\text{dB}) \quad (2)$$

The channel testing is carried out in one direction only.

For this method, the measurement uncertainties at 95 % confidence level are as follows.

SMF:  $\pm 0,16$  dB for fibre length  $< 2$  km.

MMF:  $\pm 0,19$  dB when measured attenuation  $\leq 1,4$  dB.

MMF:  $\pm 0,14 \times$  measured attenuation when measured attenuation  $> 1,4$  dB.

NOTE Measurement uncertainties are determined using IEC TR 61282-14 and representative system data. See IEC TR 61282-14 for more details.

#### **9.1.1.3 Test method for links using the one-test-cord reference method**

*Replace the subclause title with the following:*

#### **9.1.1.3 Link test method using the one-cord method and enhanced-three-test-cord reference method**

#### **Annex B (normative) Visual inspection criteria for connectors**

*Replace Annex B with the following:*

**iteh Standards**  
**(<https://standards.iteh.ai>)**  
**Document Preview**

[ISO/IEC 14763-3:2014/Amd 1:2018](https://standards.iteh.ai/catalog/standards/iso/b40c8ea3-759a-4d80-9d93-f4997077bc47/iso-iec-14763-3-2014-amd-1-2018)

<https://standards.iteh.ai/catalog/standards/iso/b40c8ea3-759a-4d80-9d93-f4997077bc47/iso-iec-14763-3-2014-amd-1-2018>

## Annex B (normative)

### Visual inspection and cleaning of optical fibre cabling interfaces

#### B.1 Specified optical fibre cabling interfaces

The different international cabling standards specify the following optical fibre cabling interfaces:

- a) LC connector simplex and duplex connectors both in multimode and single-mode PC and single mode APC configuration and adapters;
- b) MPO connectors (male and female) in multimode PC and single-mode APC configuration and adapters.

Since different configurations are possible, Annex B explains the visual inspection criteria and cleaning recommendations for each configuration of the LC and MPO cabling interface.

#### B.2 The inspection equipment

The inspection equipment that shall be used is specified in IEC 61300-3-35.

All possible connectors in multimode and single-mode fibre configurations specified in structured cabling standards shall be inspected with a low-resolution microscope.

Low resolution means that the microscope shall have a field of view of at least 250 microns. The fibre shall be maximum 50 % of the image on the microscope in the vertical axis.

The capability of the microscope for detecting 2 µm targets and the correct field of view can be determined by use of, for example, a chrome on glass artefact with 2 µm targets and a 250 µm circle. The user should contact the equipment supplier for such an artefact. Other artefacts that determine the capability of the microscopes to detect 2 µm defects/scratches may be used.

There are different types of microscopes available on the market.

Direct viewing microscopes are in general lower cost. Very important with this type of equipment is that the microscope shall contain a built-in laser safety filter.


The laser filter is to control the energy which is directed into the eye from active sources in the cabling. When direct viewing is used one should ensure that no laser or equipment with lasers is active on the cabling. See IEC 60825-2 for regulations regarding laser safety of optical fibre communication systems.

Video microscopes contain a lens which transfers via a camera the magnified image on a display. Video microscopes provide more laser safety than direct viewing microscopes.


Low resolution microscopes as specified in IEC 61300-3-35 with automated analysis are available on the market.

All microscope systems show system-to-system variability and a 100 % match between inspection results of multiple microscopes according to IEC 61300-3-35 is not achievable at this moment. This is even the case when microscopes of the same brand and type are compared.

NOTE Some microscopes are available with floodlight (side illumination); these are particular handy when inspecting MPOs for dirt.

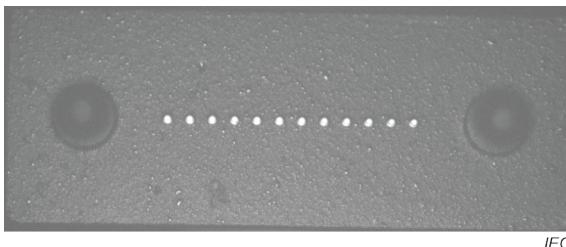

**Figure B.1 – Normal illumination of male MPO**

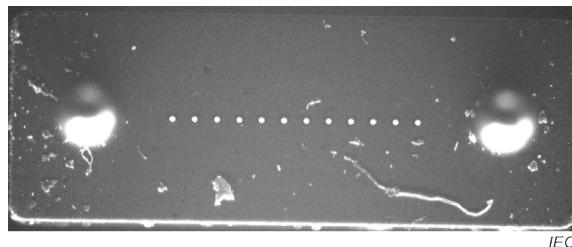

**Figure B.2 – Same ferrule with floodlight**

### B.3 Return loss requirements for cabling interfaces

#### B.3.1 General

Cabling interfaces have 3 major sets of requirements:

- multimode 20 dB for cylindrical (LC) and rectangular ferrules (MPO);
- single-mode 35 dB PC for cylindrical ferrules only (LC);
- single-mode 60 dB APC for cylindrical (LC) and rectangular ferrules (MPO).

For each of these 3 sets, Annex B shows the requirements, and the cleaning recommendations both as free connector (channel) and connector inside an adapter (link).

#### B.3.2 Multimode cylindrical and rectangular ferrules (20 dB return loss)

##### B.3.2.1 General requirements

The following inspection zones and requirements shall be followed when the end faces of multimode connectors are inspected. The inspection shall be carried out in accordance with IEC 61300-3-35.

The contact zones of all connector types shall be inspected for dirt and loose particles, for MPO cabling interfaces the contact zone is the complete ferrule end face. This inspection becomes very easy when microscopes with very low resolution with floodlight are used, see Figure B.1 and Figure B.2. Inspection for dirt shall always be followed by low-resolution inspection of the polished fibres for scratches and defects according to Table B.1. Scratches and defects are counted separately.

The inspection requirements of IEC 61300-3-35 apply. For the convenience of the user, Table B.1 contains the requirements of IEC 61300-3-35:2015 (which is the current standard at the time of publication of this document). At the time of inspection, users of this document shall verify if Table B.1 is in line with the requirements of the then valid IEC 61300-3-35.