

---

---

**Road vehicles — In-vehicle Ethernet —  
Part 6:  
Electrical 100-Mbit/s physical entity  
requirements and conformance test  
plan**

**iTeh STANDARD PREVIEW**  
*Véhicules routiers — Ethernet embarqué —  
Partie 6: Exigences et plan de tests de conformité de l'entité physique  
à 100-Mbit/s électrique*  
(standards.iteh.ai)

[ISO 21111-6:2021](https://standards.iteh.ai/catalog/standards/sist/8ea4a4e5-4180-42b1-9ca1-b18b1c19a749/iso-21111-6-2021)

[https://standards.iteh.ai/catalog/standards/sist/8ea4a4e5-4180-42b1-9ca1-  
b18b1c19a749/iso-21111-6-2021](https://standards.iteh.ai/catalog/standards/sist/8ea4a4e5-4180-42b1-9ca1-b18b1c19a749/iso-21111-6-2021)



## iTeh STANDARD PREVIEW (standards.iteh.ai)

ISO 21111-6:2021

<https://standards.iteh.ai/catalog/standards/sist/8ea4a4e5-4180-42b1-9ca1-b18b1c19a749/iso-21111-6-2021>



### **COPYRIGHT PROTECTED DOCUMENT**

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

	Page
Foreword.....	vi
Introduction.....	vii
<b>1 Scope.....</b>	<b>1</b>
<b>2 Normative references.....</b>	<b>1</b>
<b>3 Terms and definitions.....</b>	<b>1</b>
<b>4 Symbols and abbreviated terms.....</b>	<b>2</b>
4.1 Symbols.....	2
4.2 Abbreviated terms.....	2
<b>5 Conventions.....</b>	<b>4</b>
<b>6 Wake-up and sleep features.....</b>	<b>4</b>
6.1 Extension of physical coding sub-layer.....	4
6.2 Service primitives and interfaces.....	6
6.3 Power sequencing states.....	7
6.4 Command definitions.....	8
6.4.1 General.....	8
6.4.2 Low power sleep (LPS).....	8
6.4.3 Wake-up request (WUR).....	9
6.4.4 Wake-up pulse (WUP).....	9
6.5 Generation of scrambling bits $sen[2:0]$ .....	9
6.6 PCS PHY control state diagram.....	10
<b>7 CTP test system and CTC structure.....</b>	<b>12</b>
7.1 General.....	12
7.2 Test system set-up – Transmit test system.....	13
7.3 Test system set-up – Receive test system.....	14
7.4 CTC structure.....	15
<b>8 PHY – Control IUT conformance test plan (with MII access).....</b>	<b>16</b>
8.1 PHY – Group 1: PHY control and timers (with MII access).....	16
8.1.1 Overview.....	16
8.1.2 CTC_4.1.1 – PMA reset (with MII access).....	16
8.1.3 CTC_4.1.2 – Value of <code>minwait_timer</code> – <code>minwait_timer</code> in TRAINING state (with MII access).....	17
8.1.4 CTC_4.1.3 – Value of <code>maxwait_timer</code> (with MII access).....	21
8.1.5 CTC_4.1.4 – Value of <code>stabilize_timer</code> (with MII access).....	22
8.2 PHY – Group 2: PHY control state diagram (with MII access).....	23
8.2.1 Overview.....	23
8.2.2 CTC_4.2.1 – PHY control state diagram - DISABLE TRANSMITTER state (with MII access).....	23
8.2.3 CTC_4.2.2 – PHY control state diagram - SLAVE SILENT state (with MII access).....	24
8.2.4 CTC_4.2.3 – PHY control state diagram – TRAINING state (with MII access).....	25
8.2.5 CTC_4.2.4 – PHY control state diagram – SEND IDLE state (with MII access).....	28
8.2.6 CTC_4.2.5 – PHY control state diagram – SEND IDLE OR DATA state (with MII access).....	31
8.3 PHY – Group 3: PHY link monitor state diagram (with MII access).....	35
8.3.1 Overview.....	35
8.3.2 CTC_4.3.1 – Link monitor state diagram – IUT does not enter the LINK OK state (with MII access).....	36
<b>9 PCS – IUT conformance test plan (with MII access).....</b>	<b>38</b>
9.1 PCS – Group 1: PCS transmit (with MII access).....	38
9.1.1 Overview.....	38
9.1.2 CTC_3.1.1 – PCS signalling (with MII access).....	39

9.1.3	CTC_3.1.2 – PCS reset (with MII access)	41
9.1.4	CTC_3.1.3 – PCS transmit proper <b>SSD</b> (with MII access)	41
9.1.5	CTC_3.1.4 – PCS transmit proper <b>ESD</b> (with MII access)	42
9.1.6	CTC_3.1.5 – PCS transmit <b>ESD</b> with <b>tx_error</b> (with MII access)	43
9.1.7	CTC_3.1.6 – PCS transmission of stuff bits (with MII access)	44
9.1.8	CTC_3.1.7 – PCS <b>tx_error</b> (with MII access)	44
9.2	PCS – Group 2: PCS transmit state diagram (with MII access)	46
9.2.1	Overview	46
9.2.2	CTC_3.2.1 – PCS transmit state diagram - <b>SEND IDLE</b> state (with MII access)	46
9.2.3	CTC_3.2.2 – PCS transmit state diagram - <b>SSD1 VECTOR</b> and <b>SSD2 VECTOR</b> states (with MII access)	47
9.2.4	CTC_3.2.3 – PCS transmit state diagram - <b>SSD3 VECTOR</b> state (with MII access)	47
9.2.5	CTC_3.2.4 – PCS transmit state diagram - <b>TRANSMIT DATA</b> state (with MII access)	49
9.2.6	CTC_3.2.5 – PCS transmit state diagram - <b>ESD1 VECTOR</b> state (with MII access)	50
9.2.7	CTC_3.2.6 – PCS transmit state diagram - <b>ESD2 VECTOR</b> state (with MII access)	50
9.2.8	CTC_3.2.7 – PCS transmit state diagram - <b>ESD3 VECTOR</b> state (with MII access)	51
9.2.9	CTC_3.2.8 – PCS transmit state diagram - <b>ERR ESD1 VECTOR</b> state (with MII access)	52
9.2.10	CTC_3.2.9 – PCS transmit state diagram - <b>ERR ESD2 VECTOR</b> state (with MII access)	53
9.2.11	CTC_3.2.10 – PCS transmit state diagram - <b>ERR ESD3 VECTOR</b> state (with MII access)	54
9.3	PCS – Group 3: PCS receive (with MII access)	54
9.3.1	Overview	54
9.3.2	CTC_3.3.1 – PCS receive signalling (with MII access)	54
9.3.3	CTC_3.3.2 – PCS automatic polarity detection (with MII access)	55
9.3.4	CTC_3.3.3 – PCS receive <b>SSD</b> (with MII access)	56
9.3.5	CTC_3.3.4 – PCS receive <b>ESD</b> (with MII access)	57
9.3.6	CTC_3.3.5 – PCS receive <b>ERR ESD3</b> (with MII access)	57
9.3.7	CTC_3.3.6 – PCS reception of stuff bits (with MII access)	58
9.3.8	CTC_3.3.7 – PCS de-interleave ternary pairs (with MII access)	59
9.4	PCS – Group 4: PCS receive state diagram (with MII access)	59
9.4.1	Overview	59
9.4.2	CTC_3.4.1 – PCS receive state diagram (with MII access) - <b>IDLE</b> state	59
9.4.3	CTC_3.4.2 – PCS receive state diagram (with MII access) - <b>CHECK SSD2</b> state	60
9.4.4	CTC_3.4.3 – PCS receive state diagram (with MII access) - <b>CHECK SSD3</b> state	61
9.4.5	CTC_3.4.4 – PCS receive state diagram (with MII access) - <b>SSD</b> state	61
9.4.6	CTC_3.4.5 – PCS receive state diagram (with MII access) - <b>BAD SSD</b> state	62
9.4.7	CTC_3.4.6 – PCS receive state diagram (with MII access) - <b>FIRST SSD</b> state	63
9.4.8	CTC_3.4.7 – PCS receive state diagram (with MII access) - <b>SECOND SSD</b> state	64
9.4.9	CTC_3.4.8 – PCS receive state diagram (with MII access) - <b>THIRD SSD</b> state	65
9.4.10	CTC_3.4.9 – PCS receive state diagram (with MII access) - <b>DATA</b> state	65
9.4.11	CTC_3.4.10 – PCS receive state diagram (with MII access) - <b>CHECK ESD2</b> state	66
9.4.12	CTC_3.4.11 – PCS receive state diagram (with MII access) - <b>CHECK ESD3</b> state	67
9.4.13	CTC_3.4.12 – PCS receive state diagram (with MII access) - <b>BAD ESD2</b> state	68
9.4.14	CTC_3.4.13 – PCS receive state diagram (with MII access) - <b>BAD END</b> and <b>RX ERROR</b> states	69
9.5	PCS – Group 5: PCS JAB state diagram (with MII access)	70
9.5.1	Overview	70
9.5.2	CTC_3.5.1 – PCS JAB state diagram (with MII access) - <b>rcv_max_timer</b>	70
<b>10</b>	<b>PMA – IUT requirements and conformance test plan (with MII access)</b>	<b>71</b>

10.1	PMA – Group 1: PMA electrical measurements (with MII access).....	71
10.1.1	Overview .....	71
10.1.2	CTC_5.1.1 – PMA maximum transmitter output droop (with MII access).....	71
10.1.3	CTC_5.1.2 – PMA transmitter distortion (with MII access).....	72
10.1.4	CTC_5.1.3 – PMA transmitter timing jitter (with MII access).....	73
10.1.5	CTC_5.1.4 – PMA transmitter power spectral density (PSD) (with MII access).....	74
10.1.6	CTC_5.1.5 – PMA transmit clock frequency (with MII access).....	76
10.1.7	CTC_5.1.6 – PMA MDI return loss (with MII access).....	77
10.1.8	CTC_5.1.7 – PMA MDI mode conversion loss (with MII access).....	79
10.1.9	CTC_5.1.8 – PMA transmitter peak differential output (with MII access).....	82
10.2	PMA – Group 2: PMA receive tests (with MII access).....	83
10.2.1	Group 2 overview.....	83
10.2.2	CTC_5.2.1 – PMA bit error rate verification (with MII access).....	83
10.2.3	CTC_5.2.2 – PMA receiver frequency tolerance (with MII access).....	84
10.2.4	CTC_5.2.3 – PMA alien crosstalk noise rejection (with MII access).....	85
	<b>Annex A (informative) PHY control – Test suite.....</b>	<b>87</b>
	<b>Annex B (normative) PCS – Test suite.....</b>	<b>91</b>
	<b>Annex C (normative) PMA – Test system set-ups.....</b>	<b>110</b>
	<b>Bibliography.....</b>	<b>123</b>

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO 21111-6:2021](https://standards.iteh.ai/catalog/standards/sist/8ea4a4e5-4180-42b1-9ca1-b18b1c19a749/iso-21111-6-2021)

<https://standards.iteh.ai/catalog/standards/sist/8ea4a4e5-4180-42b1-9ca1-b18b1c19a749/iso-21111-6-2021>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 31, *Data communication*.

A list of all parts in the ISO 21111 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

## Introduction

The ISO 21111 series includes in-vehicle Ethernet requirements and test plans that are disseminated in other International Standards and complements them with additional test methods and requirements. The resulting requirement and test plans are structured in different documents following the Open Systems Interconnection (OSI) reference model and grouping the documents that depend on the physical media and bit rate used.

In general, the Ethernet requirements are specified in ISO/IEC/IEEE 8802-3. The ISO 21111 series provides supplemental specifications (e.g. wake-up, I/O functionality), which are required for in-vehicle Ethernet applications. In road vehicles, Ethernet networks are used for different purposes requiring different bit-rates. Currently, the ISO 21111 series specifies the 1-Gbit/s optical and 100-Mbit/s electrical physical layer.

The ISO 21111 series contains requirement specifications and test methods related to the in-vehicle Ethernet. This includes requirement specifications for physical layer entity (e.g. connectors, physical layer implementations) providers, device (e.g. electronic control units, gateway units) suppliers, and system (e.g. network systems) designers. Additionally, there are test methods specified for conformance testing and for interoperability testing.

Safety (electrical safety, protection, fire, etc.) and electromagnetic compatibility (EMC) requirements are out of the scope of the ISO 21111 series.

The structure of the specifications given in the ISO 21111 series complies with the Open Systems Interconnection (OSI) reference model as specified in ISO/IEC 7498-1<sup>[1]</sup> and ISO/IEC 10731<sup>[3]</sup>.

ISO 21111-1 defines the terms which are used in this series of standards and provides an overview of the standards for in-vehicle Ethernet including the complementary relations to ISO/IEC/IEEE 8802-3 and the amendments, the document structure, type of physical entities, in-vehicle Ethernet specific functionalities, and so on.

ISO 21111-2 specifies the interface between reconciliation sublayer and physical entity including reduced gigabit media independent interface (RGMII), and the common physical entity wake-up and synchronised link sleep functionalities, independent from physical media and bit rate.

ISO 21111-3 specifies supplemental requirements to a physical layer capable of transmitting 1-Gbit/s over plastic optical fibre compliant with ISO/IEC/IEEE 8802-3, with specific application to communications inside road vehicles, and a test plan for physical entity conformance testing.

ISO 21111-4<sup>[3]</sup> specifies the optical components requirements and test methods for 1-Gbit/s optical in-vehicle Ethernet.

ISO 21111-5 specifies, for 1-Gbit/s optical in-vehicle Ethernet, requirements on the physical layer at system level, requirements on the interoperability test set-ups, the interoperability test plan that checks the requirements for the physical layer at system level, requirements on the device-level physical layer conformance test set-ups, and device-level physical layer conformance test plan that checks a set of requirements for the OSI physical layer that are relevant for device vendors.

This document specifies advanced features of an ISO/IEC/IEEE 8802-3 in-vehicle Ethernet physical layer (often also called transceiver), e.g. for diagnostic purposes for in-vehicle Ethernet physical layers. It specifies advanced physical layer features, wake-up and sleep features, physical layer test suite, physical layer control requirements and conformance test plan, physical sublayers test suite, and physical sublayers requirements and conformance test plan.

ISO 21111-7 specifies the implementation for ISO/IEC/IEEE 8802-3, which defines the interface implementation for automotive applications together with requirements on components used to realize this Bus Interface Network (BIN). ISO 21111-7 also defines further testing and system requirements for systems implemented according to the system specification. In addition, ISO 21111-7 defines the channels for tests of transceivers with a test wiring harness that simulates various electrical communication channels.



# ISO 21111-6:2021(E)

ISO 21111-8 specifies the transmission media, the channel performance, and the tests for an ISO/IEC/IEEE 8802-3 in-vehicle Ethernet.

ISO 21111-9 specifies the data link layer requirements and conformance test plan. It specifies the requirements and test plan for devices and systems with bridge functionality.

ISO 21111-10 specifies the application to session layer requirements and conformance test plan. It specifies the requirements and conformance test plan for devices and systems that include functionality related with OSI layers from 7 to 5.

ISO 21111-11 specifies the transport to network layer requirements and conformance test plan. It specifies the requirements and conformance test plan for devices and systems that include functionality related with OSI layers from 4 and 3.

Figure 1 shows the parts of the ISO 21111 series and the document structure.

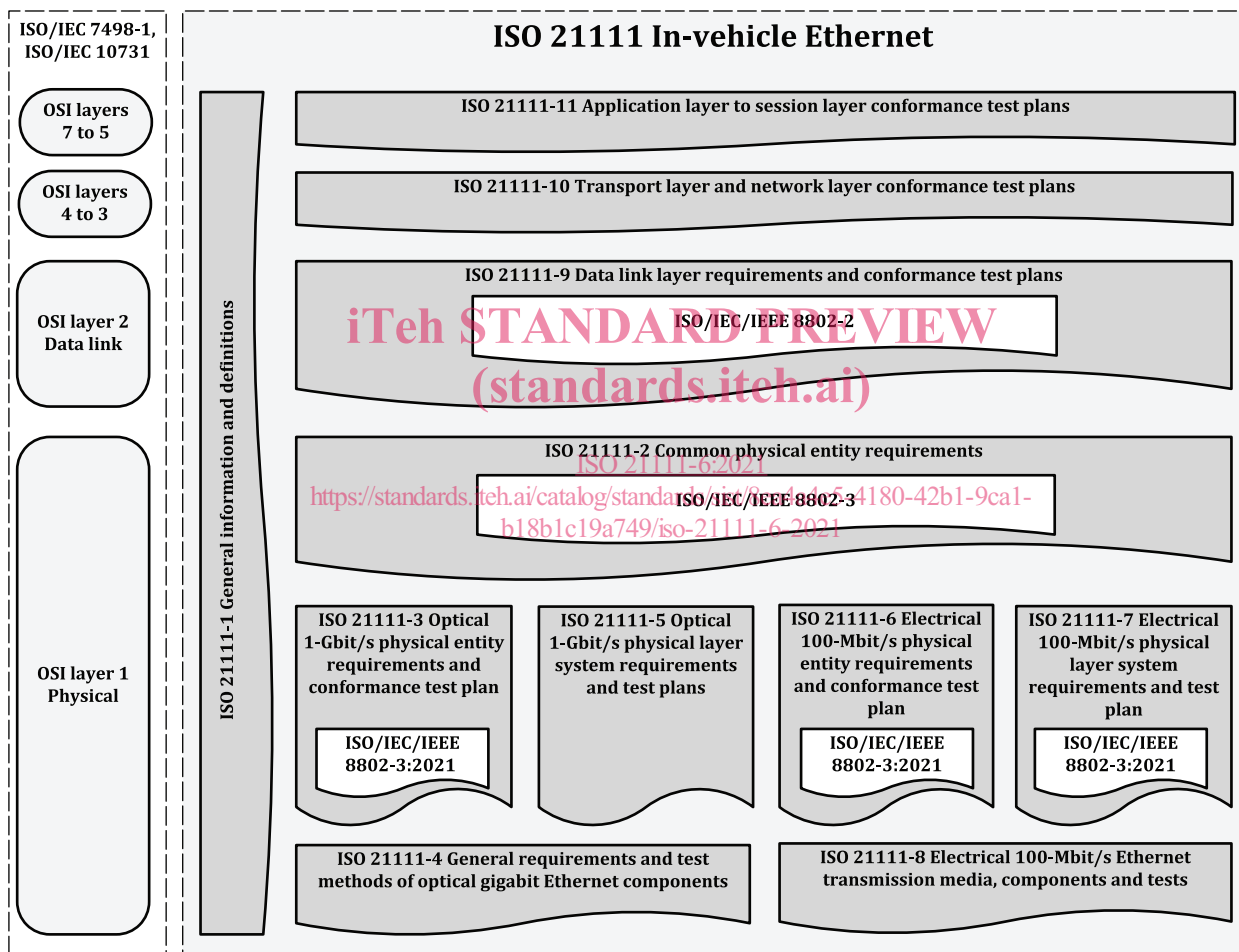


Figure 1 — In-vehicle Ethernet document reference according to OSI model



# Road vehicles — In-vehicle Ethernet —

## Part 6:

# Electrical 100-Mbit/s physical entity requirements and conformance test plan

## 1 Scope

This document specifies advanced features of an ISO/IEC/IEEE 8802-3 automotive Ethernet PHY (often also called transceiver), e.g. for diagnostic purposes for automotive Ethernet PHYs.

This document specifies:

- advanced PHY features;
- wake-up and sleep features;
- PHY test suite;
- PHY control IUT requirements and conformance test plan;
- PCS test suite;
- PCS IUT requirements and conformance test plan;
- PMA test suite; and
- PMA IUT requirements and conformance test plan.

## 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO/IEC 9646-1, *Information technology — Open Systems Interconnection — Conformance testing methodology and framework — Part 1: General concepts*

ISO 21111-1, *Road vehicles — In-vehicle Ethernet — Part 1: General information and definitions*

ISO 21111-2, *Road vehicles — In-vehicle Ethernet — Part 2: Common physical entity requirements*

ISO/IEC/IEEE 8802-3:2021, *Telecommunications and exchange between information technology systems — Requirements for local and metropolitan area networks — Part 3: Standard for Ethernet*

## 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 21111-1, ISO/IEC 9646-1 and the following apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <https://www.electropedia.org/>

**3.1  
automotive cable**

balanced 100-Ω one pair cable having characteristics defined in ISO/IEC/IEEE 8802-3:2021, 96.7 physical layer specifications and management parameters for 100-Mbit/s operation over a single balanced twisted pair cable

**3.2  
short automotive cable**

cable complying with *automotive cable* (3.1) used for test purposes and limited in length to reduce the amount of loss between the IUT transmitter and test and measurement equipment

**3.3  
PHY frame**

normal data transmission consisting of SEND\_N code groups defined in ISO/IEC/IEEE 8802-3:2021, 96.3.3.3.7 and which begins with a valid start-of-stream delimiter (SSD) and ends with a valid end-of-stream delimiter (ESD)

**3.4  
monitor**

test system used to capture and decode the transmissions from the IUT

Note 1 to entry: See B.2.

**4 Symbols and abbreviated terms**

iTeh STANDARD PREVIEW  
(standards.iteh.ai)

**4.1 Symbols**

–	empty table cell or feature undefined
$L_{CL}$	longitudinal conversion loss $(\frac{S_{dc11}}{S_{dc22}})$
$L_{CTL}$	longitudinal conversion transmission loss
$P_{SD}$	power spectral density
$T_{CL}$	transverse conversion loss
$T_{CTL}$	transverse conversion transmission loss
$x_2$	binary wild card value representation

**4.2 Abbreviated terms**

ADC	analogue to digital converter
AFEXTDC	alien far end cross conversion loss common to differential
ANEXTDC	alien near end cross conversion loss common to differential
AWGN	additive white Gaussian noise
BER	bit error rate
BI_DA	bi-directional data signal pair A
COM	communication ready (status bit)
COR	polarity correct

CTC	conformance test case
CTP	conformance test plan
Cvt	convention
DCQ	dynamic channel quality
DD	defect distance
DET	polarity detection
DSP	digital signal processing
ECU	electronic control unit
GMI	gigabit media independent interface
HDD	harness defect detection
ICMP	Internet Control Message Protocol
IOL	interoperability laboratory
IUT	implementation under test
LCL	longitudinal conversion loss
LCTL	longitudinal conversion transmission loss
LFL	link failures and losses
LP	link partner
LPF	low-pass filter
LQ	link quality
LRT	local receiver time
LTT	link-training time
LU	link-up time
M	mandatory
MAC	media access control
MDC	management data clock
MDI	medium dependent interface
MII	media independent interface
MSE	mean square error
MSE_WC	mean square error_worst-case
O	optional
OS	OPEN/SHORT detection

## ISO 21111-6:2021(E)

PAM3	pulse amplitude modulation (3 level)
PCB	printed circuit board
PCS	physical coding sub-layer
PEC	pulse error correction
PHY	physical layer
pMSE	peak MSE
PLL	phase locked loop
POL	polarity (detection and correction)
PSAACRF	power sum attenuations to alien crosstalk ratio far end
PSANEXT	power sum alien near end crosstalk loss
PSD	power spectral density
RBW	resolution bandwidth
RGMII	reduced gigabit media independent interface
RRT	remote receiver time
SA	RF spectral analyser
SNR	signal to noise ratio
SQI	signal quality index
TDR	time domain reflectometer
TIE	time interval error
UI	unit interval
VBW	video bandwidth
VNA	RF network analyser

STANDARD PREVIEW  
(standards.iteh.ai)

[ISO 21111-6:2021](https://standards.iteh.ai/catalog/standards/sist/8ea4a4e5-4180-42b1-9ca1-b18b1c19a749/iso-21111-6-2021)

<https://standards.iteh.ai/catalog/standards/sist/8ea4a4e5-4180-42b1-9ca1-b18b1c19a749/iso-21111-6-2021>

## 5 Conventions


This document is based on OSI service conventions as specified in ISO/IEC 10731<sup>[2]</sup>.

## 6 Wake-up and sleep features

### 6.1 Extension of physical coding sub-layer

This subclause describes the modification of the physical coding sub-layer of ISO/IEC/IEEE 8802-3:2021.

<b>REQ</b>	<b>1.1 Wake-up and sleep features – Extension of physical coding sub-layer</b>
<a href="#">Figure 2</a> specifies the state diagram of the power state machine, which implements the two-way handshake protocol.	

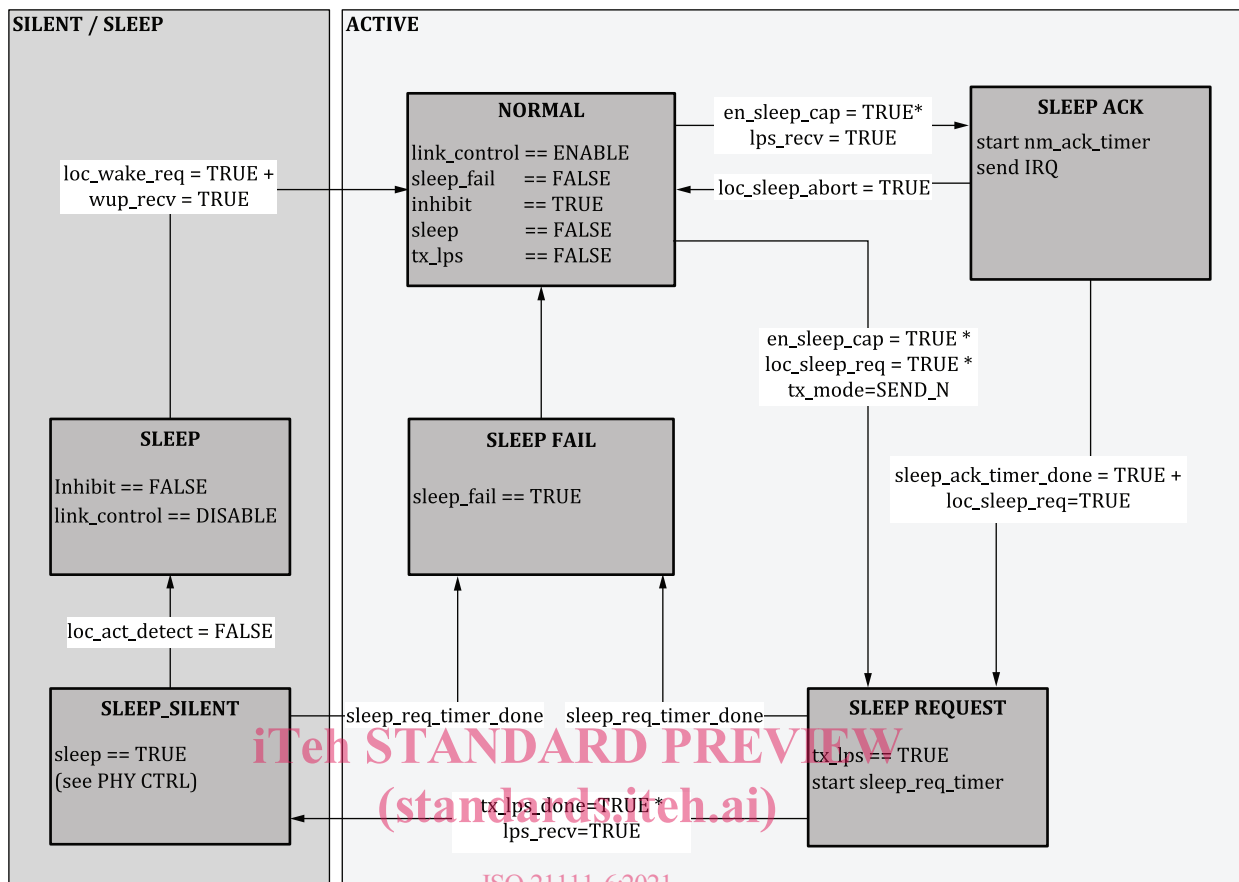

ISO 21111-6:2021  
<https://standards.itech.ai/catalog/standards/sist/8ea4a4e5-4180-42b1-9ca1->  
**Figure 2 — Power sequencing ISO/IEC/IEEE 8802-3:2021**

In case the link is up ( $tx\_mode = SEND\_N$ ) and `Sleep.request` is asserted, the PHY enters the `Sleep.Request` state and sends LPS commands. The link partner receiving those LPS commands enters `SLEEP_ACK` state and starts `sleep_ack_timer`. If `loc_sleep_abort` is asserted, the sleep is aborted because of an incoming data message. If sleep reject is not done, the link partner enters `SLEEP_REQUEST` state and sends LPS commands. If the PHY detects that it sends and receives LPS commands, it transits to `SLEEP_SILENT` state and eventually to `SLEEP`. On the other hand, if the handshaking is not done before the `sleep_req_timer` timeout, the PHY enters `SLEEP_FAIL` and transits back to `SEND_IDLE_OR_DATA` state.

The signalling of a `Wakeup.request` depends on the state of the link. If the link is up ( $tx\_mode = SEND\_N$ ) the PHY transmits a WUR command over the active link during `IDLE` times. If the link is down ( $tx\_mode = SEND\_Z$ ) the PHY transmits a WUP pulse. If the link is not yet established ( $!loc\_rcvr\_status$ ), for instance because the link is still in training ( $tx\_mode = SEND\_I$ ), the link is first established, then a WUR command is sent.

<b>REQ</b>	<b>1.2 Wake-up and sleep features - Selective wake-up forwarding mechanism</b>
	Multi-PHY devices (e.g. switches) shall implement a selective wake-up forwarding mechanism. If a multi-PHY device detects a <code>Wakeup.request</code> (either WUR or WUP) on one port, it shall be possible to forward the request to other PHYs of the device and to any other Single-PHY or Multi-PHY device.

<b>REQ</b>	<b>1.3 Wake-up and sleep features - Selective wake-up forwarding mechanism Single PHY device</b>
------------	--

Single-PHY devices shall implement a selective wake-up forwarding mechanism. If a Single-PHY device detects a Wakeup.request (either WUR or WUP), it shall be possible to forward the request to other Single-PHY or Multi-PHY devices.

**REQ 1.4 Wake-up and sleep features – wake-up over a passive link (WUP) and active link (WUR)**

It shall be possible to forward a wake-up over a passive link (WUP) as well as a wake-up over an active link (WUR) immediately to another port (or PHY).

The `Wakeup.indicate` should be generated upon wake-up events. In case the link is down, this service primitive is generated upon the reception of WUP pulses (`wup_recv`) or if a local wake-up request (`loc_wake_req`) or a WUR is received (`wur_recv`). The implementation of the energy detection process is left to the PHY vendor.

**REQ 1.5 Wake-up and sleep features – Energy detection**

The energy detection process shall not take longer than 2 ms.

**REQ 1.6 Wake-up and sleep features – IDLE pattern on the link triggers the energy detection**

It shall be ensured that any transmitted IDLE pattern on the link triggers the energy detection (`wup_recv = TRUE`).

iTech STANDARD PREVIEW  
(standards.itech.ai)

**REQ 1.7 Wake-up and sleep features – PHY detects a wake-up request**

If the PHY detects a wake-up request while the sleep process has already been started, going into sleep shall be terminated and the wake-up shall be processed if possible.

**REQ 1.8 Wake-up and sleep features – Entering the SLEEP state**

If the PHY detects a wake-up request while the transit into SLEEP state is irreversible, this wake-up request shall be stored and executed immediately upon entering the SLEEP state.

No wakeup request should be lost.

## 6.2 Service primitives and interfaces

Figure 3 shows the ISO/IEC/IEEE 8802-3:2021 service primitives.

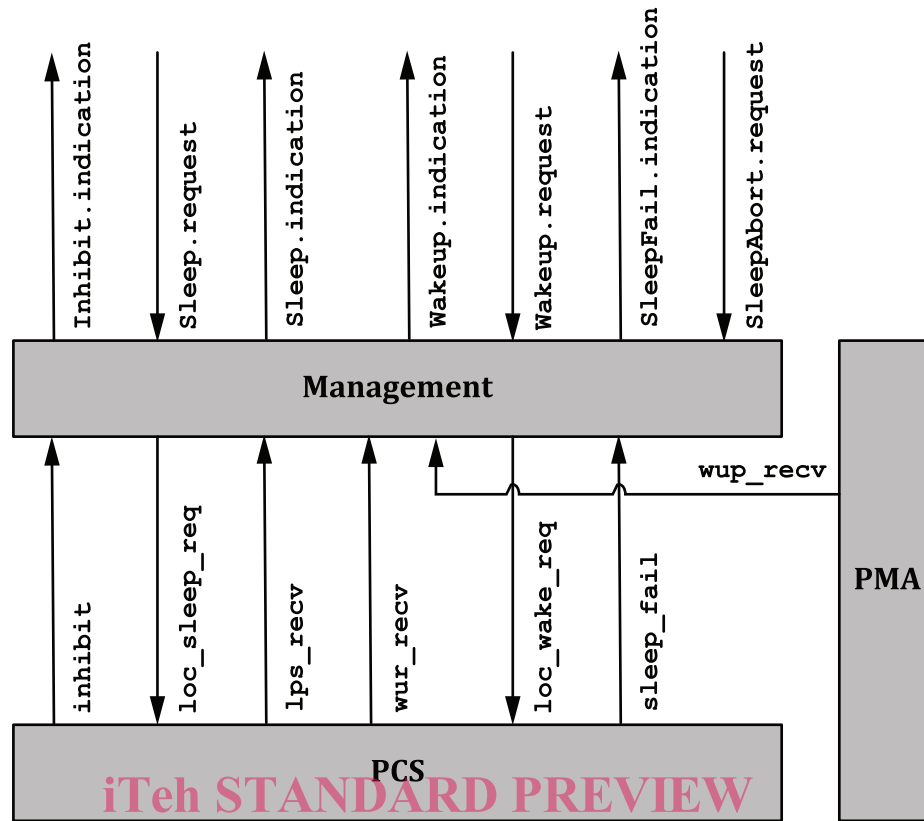


Figure 3 — ISO/IEC/IEEE 8802-3:2021 service primitives

<https://standards.iteh.ai/catalog/standards/sist/8e49de5-4190-42b1-9ca1-b18b1c19a749/iso-21111-6-2021>

<b>REQ</b>	<b>1.9 Wake-up and sleep features – Mapping between this document and ISO 21111-2 service primitives</b>
Table 1 specifies the mapping between this document and ISO 21111-2 service primitives which shall be followed.	

Table 1 — Mapping between this document and ISO 21111-2 service primitives

ISO 21111-6 (this document) service primitives	ISO 21111-2 service primitives
SleepConfig.request	PHY_ConfigSleepReject.request
Inhibit.indication	PHY_SleepStatus.indication
Sleep.request	PHY_LinkSleep.request
Sleep.indication	PHY_LinkSleepRequestEvent.indication
Wakeup.indication	PHY_WakeUp.indication
Wakeup.request	PHY_WakeUp.request
SleepFail.indications	PHY_LinkSleep.indication
SleepAbort.request	PHY_LinkSleepRequestAbort.request

### 6.3 Power sequencing states

The following requirements specify power sequencing states.

<b>REQ</b>	<b>1.10 Wake-up and sleep features – Power sequencing states</b>
The power sequencing states NORMAL, SLEEP_ACK, SLEEP_REQ, SLEEP_SILENT, SLEEP_FAIL and SLEEP shall be implemented as specified in Figure 2.	