

# DRAFT INTERNATIONAL STANDARD

## ISO/DIS 21806-10

ISO/TC 22/SC 31

Secretariat: DIN

Voting begins on:  
2020-09-03

Voting terminates on:  
2020-11-26

---

---

## Road vehicles — Media Oriented Systems Transport (MOST) —

### Part 10: 150-Mbit/s coaxial physical layer

*Véhicules routiers — Système de transport axé sur les médias —  
Partie 10: Couche coaxiale physique de 150-Mbit/s*

ICS: 43.040.15

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

<https://standards.iteh.ai/catalog/standards/sist/03d590b9-b4b6-41aa-a402-8dbe83bba0e3/iso-dis-21806-10>

THIS DOCUMENT IS A DRAFT CIRCULATED FOR COMMENT AND APPROVAL. IT IS THEREFORE SUBJECT TO CHANGE AND MAY NOT BE REFERRED TO AS AN INTERNATIONAL STANDARD UNTIL PUBLISHED AS SUCH.

IN ADDITION TO THEIR EVALUATION AS BEING ACCEPTABLE FOR INDUSTRIAL, TECHNOLOGICAL, COMMERCIAL AND USER PURPOSES, DRAFT INTERNATIONAL STANDARDS MAY ON OCCASION HAVE TO BE CONSIDERED IN THE LIGHT OF THEIR POTENTIAL TO BECOME STANDARDS TO WHICH REFERENCE MAY BE MADE IN NATIONAL REGULATIONS.

RECIPIENTS OF THIS DRAFT ARE INVITED TO SUBMIT, WITH THEIR COMMENTS, NOTIFICATION OF ANY RELEVANT PATENT RIGHTS OF WHICH THEY ARE AWARE AND TO PROVIDE SUPPORTING DOCUMENTATION.

This document is circulated as received from the committee secretariat.



Reference number  
ISO/DIS 21806-10:2020(E)

© ISO 2020

**iTeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

ISO/DIS 21806-10  
<https://standards.iteh.ai/catalog/standards/sist/03d590b9-b4b6-41aa-a402-8dbe83bba0e3/iso-dis-21806-10>



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2020

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

	Page
<b>Foreword</b> .....	<b>v</b>
<b>Introduction</b> .....	<b>vi</b>
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative references</b> .....	<b>1</b>
<b>3 Terms and definitions</b> .....	<b>1</b>
<b>4 Symbols and abbreviated terms</b> .....	<b>2</b>
4.1 Symbols.....	2
4.2 Abbreviated terms.....	2
<b>5 Conventions</b> .....	<b>3</b>
<b>6 Physical layer service interface to OSI data link layer</b> .....	<b>3</b>
6.1 Overview.....	3
6.2 Data type definitions.....	3
6.3 Event indications and action requests.....	3
6.3.1 P_EVENT.INDICATE.....	3
6.3.2 P_ACTION.REQUEST.....	3
6.4 Parameters.....	4
6.4.1 PHY_Event.....	4
6.4.2 PHY_Request.....	4
<b>7 Basic physical layer requirements</b> .....	<b>5</b>
7.1 Logic terminology.....	5
7.1.1 Single-ended low-voltage digital signals.....	5
7.1.2 Differential LVDS signals.....	5
7.2 Specification Points (SPs).....	5
7.3 Phase variation.....	6
7.3.1 General.....	6
7.3.2 Wander.....	6
7.3.3 Jitter.....	6
7.3.4 Clock recovery and reference clock.....	7
7.3.5 Link quality.....	8
7.3.6 MOST network quality.....	10
<b>8 MOST150 cPHY requirements</b> .....	<b>13</b>
8.1 General MOST network parameters.....	13
8.1.1 MOST network coding.....	13
8.1.2 Link and interconnect type.....	15
8.1.3 Specification point (SP) details.....	15
8.1.4 Analogue frontend.....	16
8.1.5 Integration of coaxial transceiver.....	17
8.2 Models and measurement methods.....	19
8.2.1 Golden PLL.....	19
8.2.2 Jitter filter.....	19
8.2.3 Retimed bypass mode and stress pattern.....	20
<b>9 Link specifications</b> .....	<b>21</b>
9.1 General.....	21
9.2 Specification point SP1.....	21
9.3 Specification point SP2.....	22
9.4 Coaxial link requirements.....	23
9.4.1 Coaxial interconnect, length and attenuation.....	23
9.4.2 Characteristic impedance and return loss (RL).....	25
9.5 Specification point SP3.....	29
9.6 Specification point SP4.....	29

<b>10</b>	<b>Power-on and power-off</b> .....	<b>30</b>
10.1	Frequency reference and power supply.....	30
10.2	Power supply monitoring circuitry.....	31
10.3	Coaxial transceiver ECC and CEC.....	31
10.3.1	General.....	31
10.3.2	CTR requirements.....	31
10.3.3	ECC requirements.....	31
10.3.4	ECC power-on and power-off sequence.....	33
10.3.5	CEC requirements.....	34
10.3.6	CEC power-on and power-off sequence.....	36
<b>11</b>	<b>MOST network requirements</b> .....	<b>36</b>
11.1	SP4 receiver tolerance.....	36
11.2	TimingMaster delay tolerance.....	37
11.3	Environmental requirements and considerations.....	38
<b>12</b>	<b>Electrical interfaces</b> .....	<b>38</b>
12.1	LVDS.....	38
12.2	Bit rate and frequency tolerance.....	38
<b>13</b>	<b>MOST150 cPHY topologies</b> .....	<b>39</b>
13.1	Daisy chain topologies.....	39
13.2	Daisy chain structure.....	41
13.3	2-port nodes.....	41
13.4	Port1 delay drift.....	42
<b>14</b>	<b>Device connectors</b> .....	<b>44</b>
<b>15</b>	<b>Specification points for cable extensions</b> .....	<b>44</b>
<b>16</b>	<b>Coaxial interconnect attenuation</b> .....	<b>45</b>
<b>Bibliography</b> .....	ISO/DIS 21806-10.....	<b>47</b>
	<a href="https://standards.iteh.ai/catalog/standards/sist/03d590b9-b4b6-41aa-a402-8dbe83bba0e3/iso-dis-21806-10">https://standards.iteh.ai/catalog/standards/sist/03d590b9-b4b6-41aa-a402-8dbe83bba0e3/iso-dis-21806-10</a>	

iTech STANDARD PREVIEW  
(standards.iteh.ai)

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 31, *Data communication*.

A list of all parts in the ISO 21806 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

## Introduction

The Media Oriented Systems Transport (MOST) communication technology was initially developed at the end of the 1990s in order to support complex audio applications in cars. The MOST Cooperation was founded in 1998 with the goal to develop and enable the technology for the automotive industry. Today, MOST<sup>1)</sup> enables the transport of high quality of service (QoS) audio and video together with packet data and real-time control to support modern automotive multimedia and similar applications. MOST is a function-oriented communication technology to network a variety of multimedia devices comprising one or more MOST nodes.

Figure 1 shows a MOST network example.

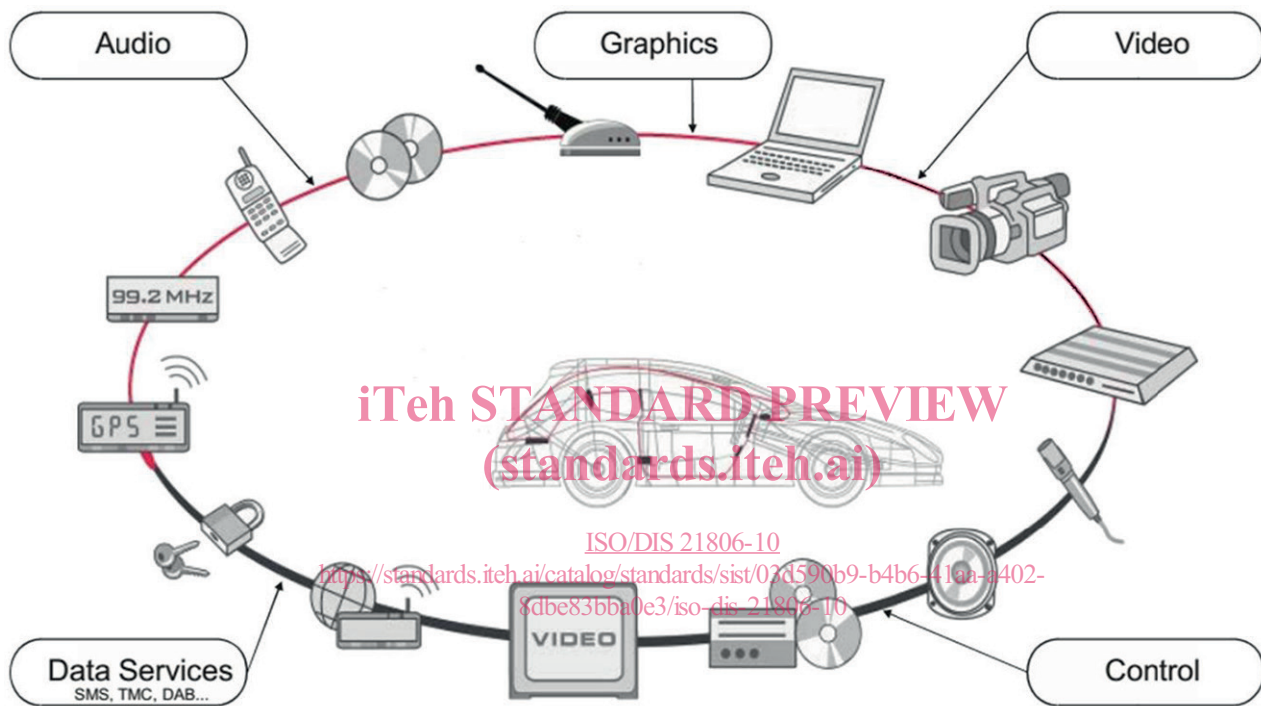


Figure 1 — MOST network example

The MOST communication technology provides:

- synchronous and isochronous streaming,
- small overhead for administrative communication control,
- a functional and hierarchical system model,
- API standardization through a function block (FBlock) framework,
- free partitioning of functionality to real devices,
- service discovery and notification, and
- flexibly scalable automotive-ready Ethernet communication according to ISO/IEC/IEEE 8802-3<sup>[4]</sup>.

MOST is a synchronous time-division-multiplexing (TDM) network that transports different data types on separate channels at low latency. MOST supports different bit rates and physical layers. The network clock is provided with a continuous data signal.

1) MOST® is the registered trademark of Microchip Technology Inc. This information is given for the convenience of users of this document and does not constitute an endorsement by ISO.

Within the synchronous base data signal, the content of multiple streaming connections and control data is transported. For streaming data connections, bandwidth is reserved to avoid interruptions, collisions, or delays in the transport of the data stream.

MOST specifies mechanisms for sending anisochronous, packet-based data in addition to control data and streaming data. The transmission of packet-based data is separated from the transmission of control data and streaming data. None of them interfere with each other.

A MOST network consists of devices that are connected to one common control channel and packet channel.

In summary, MOST is a network that has mechanisms to transport the various signals and data streams that occur in multimedia and infotainment systems.

The ISO Standards Maintenance Portal (<https://standards.iso.org/iso/>) provides references to MOST specifications implemented in today's road vehicles because easy access via hyperlinks to these specifications is necessary. It references documents that are normative or informative for the MOST versions 4V0, 3V1, 3V0, and 2V5.

The ISO 21806 series has been established in order to specify requirements and recommendations for implementing the MOST communication technology into multimedia devices and to provide conformance test plans for implementing related test tools and test procedures.

To achieve this, the ISO 21806 series is based on the open systems interconnection (OSI) basic reference model in accordance with ISO/IEC 7498-1<sup>[1]</sup> and ISO/IEC 10731<sup>[3]</sup>, which structures communication systems into seven layers as shown in [Figure 2](#). Stream transmission applications use a direct stream data interface (transparent) to the data link layer.

IT&I STANDARD PREVIEW  
(standards.iteh.ai)

[ISO/DIS 21806-10](#)

<https://standards.iteh.ai/catalog/standards/sist/03d590b9-b4b6-41aa-a402-8dbe83bba0e3/iso-dis-21806-10>

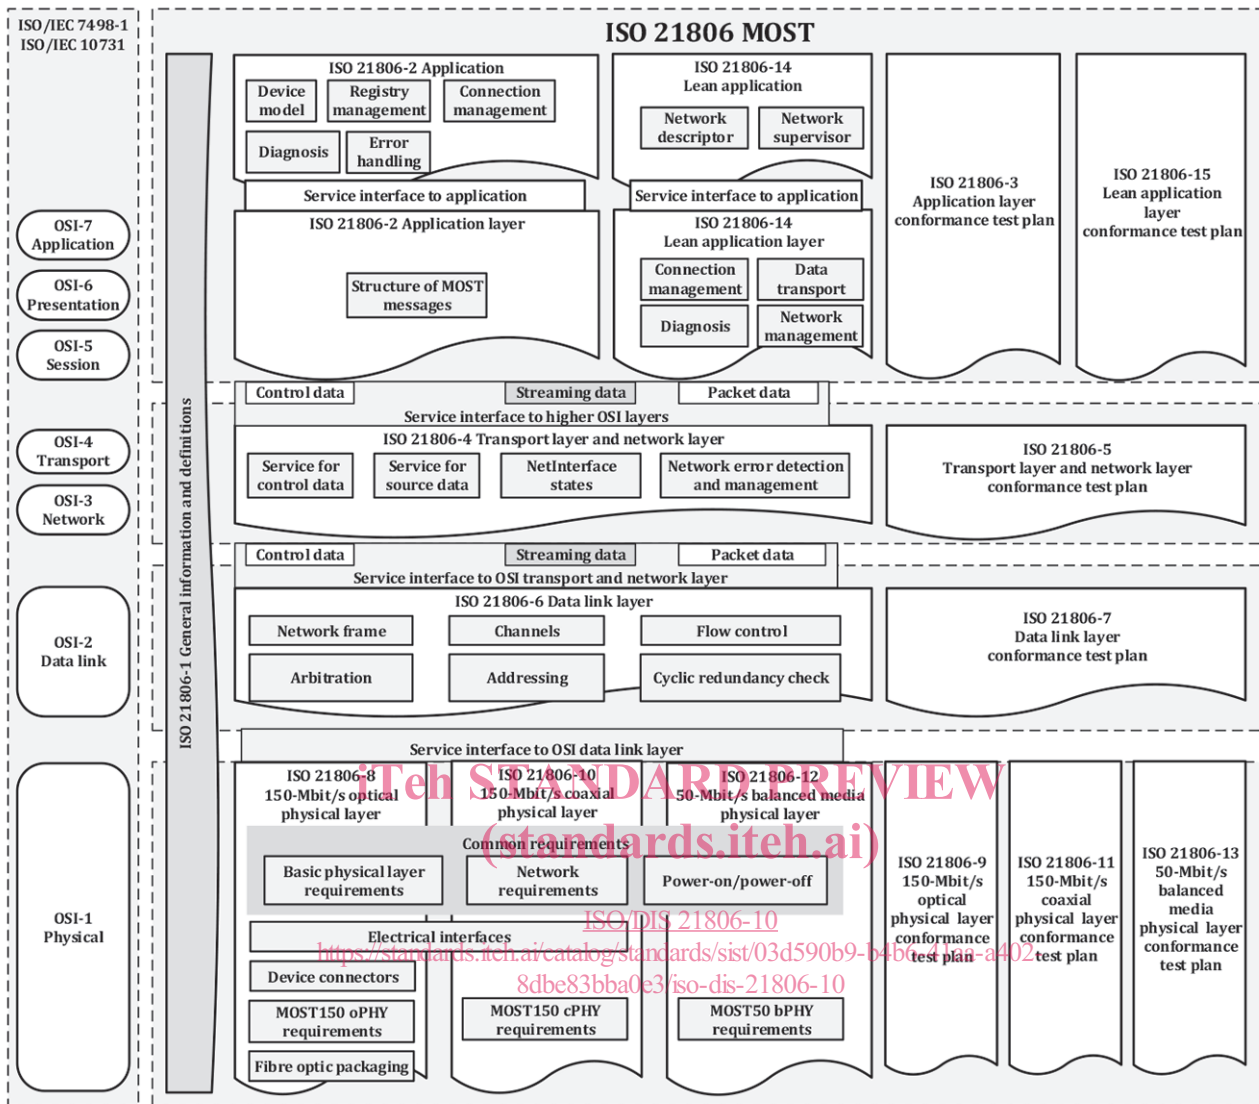


Figure 2 — ISO 21806 documents reference according to the OSI model



# Road vehicles — Media Oriented Systems Transport (MOST) —

## Part 10: 150-Mbit/s coaxial physical layer

### 1 Scope

This document specifies the 150-Mbit/s coaxial physical layer for MOST (MOST150 cPHY), a synchronous time-division-multiplexing network.

This document specifies the applicable constraints and defines interfaces and parameters, suitable for the development of products based on MOST150 cPHY. Such products include coaxial links, coaxial receivers, coaxial transmitters, electrical to coaxial converters, and coaxial to electrical converters.

This document also establishes basic measurement techniques and actual parameter values for MOST150 cPHY.

### 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 21806-1, *Road vehicles – Media Oriented Systems Transport (MOST) – Part 1: General information and definitions*

ISO 20860-1:2008, *Road vehicles — 50 ohms impedance radio frequency connection system interface — Part 1: Dimensions and electrical requirements*

AEC-Q100 *Failure Mechanism Based Stress Test Qualification For Integrated Circuits* [SOURCE: <http://www.aecouncil.com/AECDocuments.html>]

No J.E.D.E.C. JESD8C.01, *Interface Standard for Nominal 3 V/3,3 V Supply Digital Integrated Circuits* [SOURCE: <http://www.jedec.org/>]

TIA/EIA-644-A-2001, *Electrical Characteristics of Low Voltage Differential Signaling (LVDS) Interface Circuits* [SOURCE: <https://www.ti.com/lit/zip/tia644a>]

### 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 21806-1, and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <https://www.iso.org/obp>

#### 3.1

##### electrical to coaxial converter

##### ECC

MOST component that converts an electrical signal into a coaxial signal

**3.2**  
**coaxial to electrical converter**  
**CEC**

MOST component that converts a coaxial signal into an electrical signal

**4 Symbols and abbreviated terms**

**4.1 Symbols**

---	empty cell/undefined
$F_s$	network frame rate
$T_A$	ambient temperature
$t_{MDT}$	TimingMaster delay tolerance
$V_{OH}$	output high voltage
$V_{OL}$	output low voltage

**4.2 Abbreviated terms**

AFE	analogue frontend
APWD	average pulse width distortion
BER	bit error rate
BR	bit rate
BPF	bits per frame
Cd[n]	condition
CEC	coaxial to electrical converter
cPHY	coaxial physical layer
CTR	coaxial transceiver
DC	direct current
DCA	DC adaptive
DDJ	data-dependant jitter
DLL	data link layer
DSV	digital sum value
ECU	electronic control unit
ECC	electrical to coaxial converter
EMC	electromagnetic compatibility
EMI	electromagnetic interference

**ITeh STANDARD PREVIEW**  
**(standards.iteh.ai)**

[ISO/DIS 21806-10](https://standards.iteh.ai/catalog/standards/sist/03d590b9-b4b6-41aa-a402-8dbe83bba0e3/iso-dis-21806-10)

<https://standards.iteh.ai/catalog/standards/sist/03d590b9-b4b6-41aa-a402-8dbe83bba0e3/iso-dis-21806-10>

LVDS	Low-Voltage Differential Signalling
N/A	not applicable
MNC	MOST network controller
PCB	printed circuit board
PDF	probability density function
PHY	physical layer
PLL	phase locked loop
RL	return loss
RMS	root mean square
Rx data	encoded digital bit stream being received
SDA	serial data analyser
SP[n]	Specification Point
TDM	time-division-multiplexing
Tx data	encoded digital bit stream being transmitted
UI	unit interval

## 5 Conventions

This document is based on OSI service conventions as specified in ISO/IEC 10731<sup>[3]</sup>.

## 6 Physical layer service interface to OSI data link layer

### 6.1 Overview

The physical layer (PHY) service interface specifies the abstract interface to the OSI data link layer (DLL), see ISO 21806-6<sup>[1]</sup>.

### 6.2 Data type definitions

The data type `Enum` is defined as an 8-bit enumeration.

### 6.3 Event indications and action requests

#### 6.3.1 P\_EVENT.INDICATE

The PHY shall use `P_EVENT.INDICATE` to indicate the occurrence of an event to the DLL.

```
P_EVENT.INDICATE{
    PHY_Event
}
```

#### 6.3.2 P\_ACTION.REQUEST

`P_ACTION.REQUEST` shall trigger the execution of a request.

```
P_ACTION.REQUEST {
    PHY_Request
}
```

## 6.4 Parameters

### 6.4.1 PHY\_Event

[Table 1](#) specifies the `PHY_Event` parameter, which notifies the DLL about events.

**Table 1 — Parameter passed from PHY to DLL**

Parameter	Data type	Description
<code>PHY_Event</code>	Enum {  <code>PHY_Output_Off</code> ,  <code>PHY_Network_Activity</code>  }	An event that is reported to the DLL.

[Table 2](#) specifies the parameter values for the `PHY_Event` Enum.

**Table 2 — PHY\_Event Enum values**

Enum value	Description
<code>PHY_Output_Off</code>	MNC transmit terminal switched off.
<code>PHY_Network_Activity</code>	Network activity detected at the MNC receive terminal.

### 6.4.2 PHY\_Request

[Table 3](#) specifies the `PHY_Request` parameter, which is passed from DLL to PHY.

**Table 3 — Parameter passed from DLL to PHY**

Parameter	Data type	Description
<code>PHY_Request</code>	Enum {  <code>cmd_Output_Off</code> ,  <code>cmd_Output_On</code> ,  <code>cmd_Open_Bypass</code> ,  }	A request from the DLL.

[Table 4](#) specifies the parameter values for the `PHY_Request` Enum.

**Table 4 — PHY\_Request Enum values**

Enum value	Description
<code>cmd_Output_Off</code>	Switching off the MNC transmit terminal requested. By default, it is off.
<code>cmd_Output_On</code>	Switching on the MNC transmit terminal requested. By default, it is off.
<code>cmd_Open_Bypass</code>	Opening the bypass requested. By default, the bypass is closed.

## 7 Basic physical layer requirements

### 7.1 Logic terminology

#### 7.1.1 Single-ended low-voltage digital signals

For the parameters provided in JEDEC No. JESD8C.01, Table 5 defines the corresponding terms for single-ended signals used in this document. These terms are used to describe the logic states of signals /RST and STATUS.

**Table 5 — Terms for single-ended signals**

Term	Corresponding JEDEC parameter
Low	$V_{OL}$ (output low voltage)
Logic 0	
High	$V_{OH}$ (output high voltage)
Logic 1	

#### 7.1.2 Differential LVDS signals

TIA/EIA-644-A-2001 uses the labels A and B for the device output terminals; this document uses P and an N, respectively. Table 6 specifies the terms for LVDS signals. The terms correspond to the TIA/EIA-644-A-2001 specification.

**Table 6 — Terms for LVDS signals**

Term	Corresponding JEDEC parameter
Low	The P terminal shall be negative with respect to the N terminal for a binary 0 state.
Logic 0	
High	The P terminal shall be positive with respect to the N terminal for a binary 1 state.
Logic 1	


Since some of the MOST devices specified in this document use a tri-state LVDS interface, Table 7 specifies the terms for LVDS bus states.

**Table 7 — Terms for LVDS bus states**

Term	Corresponding TIA/EIA description
Disabled	The P and N terminals are in a high impedance state. If small leakage currents exist, they might cause an indeterminate voltage on the line/load.
Off	
Enabled	The P and the N terminals are driving the line/load. The outputs are at valid LVDS logic levels provided the input data is valid.
On	
Valid LVDS signal	Data or LVDS 0, according to LVDS voltage levels.

### 7.2 Specification Points (SPs)

A physical connection of two MOST devices is called a link. Measurements are taken at specific locations along a link. These locations are called SPs. The location of the SPs is shown in Figure 3.

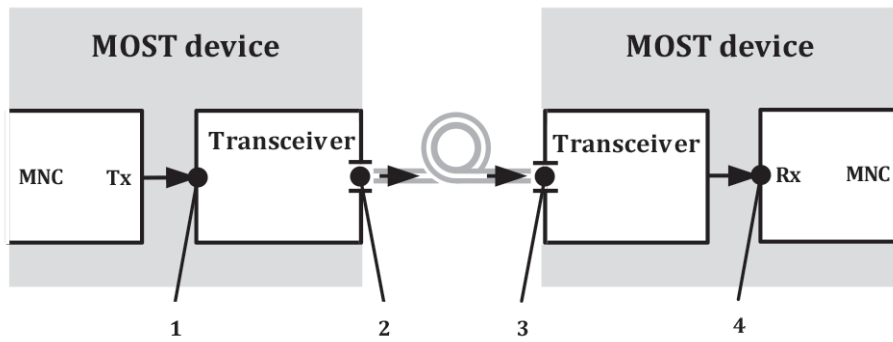

- Key**
- 1 Specification Point 1
  - 2 Specification Point 2
  - 3 Specification Point 3
  - 4 Specification Point 4

**Figure 3 — Location of SPs along a link**

SPs define interfaces that are boundaries between a transmitting and a receiving MOST component. For each of those interfaces, a set of requirements and properties is defined (e.g., signal timing, signal amplitude, connector interface drawings). SP1 and SP4 are located between a MOST network controller (MNC) and the corresponding transceiver. SP2 and SP3 are located between transceivers and a wiring harness.

For MOST components that are located between two adjacent SPs, requirements and properties can be derived. The definitions of the second SP of the pair specify the component's output performance to be achieved, considering input conditions as defined in the first SP. For example, a transmit converter component specification can be derived from SP1 and SP2. Receive converter component requirements are covered by SP3 and SP4. Wiring harness requirements can be derived from SP2 and SP3.

In addition to the definitions of the SPs for a point-to-point link, this document defines requirements covering the stability of the MOST network. Examples are requirements regarding jitter transfer through MOST devices, jitter accumulation through the MOST network, and power state transitions.

The specified parameters in this document are minimum values to ensure functionality of the MOST network in a wide range of environmental conditions.

**7.3 Phase variation**

**7.3.1 General**

Phase variation is caused by data stream timing noise and distortion.

**7.3.2 Wander**

Wander is made up of any phase variation from 0 Hz to 10 Hz. All active MOST components in the MOST network create wander. Wander is a function of the temperature drift and propagates from node to node. Typically, wander does not affect alignment jitter eye masks.

NOTE Wander might impact the TimingMaster.

**7.3.3 Jitter**

Jitter is any phase variation of frequencies above 10 Hz. Every MOST component and the transmission medium create jitter in the MOST network. Jitter is correlated or uncorrelated. The dominant jitter


sources in the MOST network consist of PLL noise, link-induced DDJ, sensitivity-induced CEC noise, crosstalk, or phenomena such as power supply coupling. Data scrambling is used to eliminate DDJ correlation between nodes.

There are two jitter categories as shown in [Figure 4](#):

- Alignment jitter: jitter that affects the reception of data by degrading the receiver eye diagram with horizontal closure (influences eye diagram measurement); it has impact only on a link as data recovery is performed by the MNC.
- Transferred jitter: jitter that is accumulated over all links (does not influence eye diagram measurement); the TimingMaster jitter tolerance shall be determined accordingly.

As the jitter on the measured signal increases, the eye closes more and more. A keep-out mask is specified to detect possible error traces. If the eye does not hit the mask then data recovery is ensured. Mask design depends on the required receiver margin and the characteristics of the channel.

[Figure 4](#) shows the phase variation measurements.

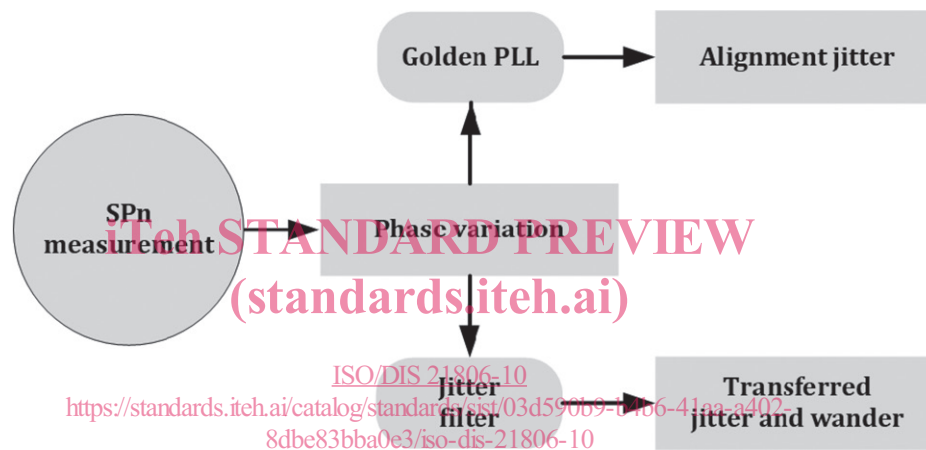

**Figure 4 — Phase variation measurements**

### 7.3.4 Clock recovery and reference clock

#### 7.3.4.1 General

Phase variation can be measured directly on a data stream. To view alignment jitter and transferred jitter independently, special tools are required.

All MOST networks contain one device that implements the TimingMaster, which creates the reference clock. This clock is embedded within the data stream. All other MOST devices contain TimingSlaves that recover the clock from the data stream. Therefore, clock recovery is a basic functionality of an MNC. MOST components add phase variation to the data stream. This degrades the reference clock.

Receiver jitter tolerance and jitter transfer are basic operation properties of any MNC. Alignment jitter is measured by means of an eye diagram formed with a Golden PLL. Transferred jitter is measured with a jitter filter.

[Figure 5](#) illustrates clock recovery and data recovery in an MNC. Therefore, there is a need for a Golden PLL model and a jitter filter model. Together they reflect the required jitter behaviour of an MNC.